


**RoHS
Compliant**


Surface Mount Schottky Barrier Rectifier
 Reverse Voltage - 20 to 200 V
 Forward Current - 2.0A

Features


- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

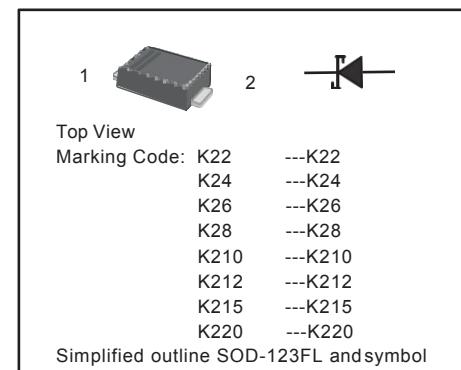

Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	K22	K24	K26	K28	K210	K212	K215	K220	Units		
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	120	150	200	V		
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	84	105	140	V		
Maximum DC Blocking Voltage	V _{DC}	20	40	60	80	100	120	150	200	V		
Maximum Average Forward Rectified Current	I _{F(AV)}	2.0							A			
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	50							A			
Max Instantaneous Forward Voltage at 2 A	V _F	0.55		0.70		0.85		0.95		V		
Maximum DC Reverse Current T _a = 25°C at Rated DC Reverse Voltage T _a = 100°C	I _R	0.5 5		0.3 3						mA		
Typical Junction Capacitance ⁽¹⁾	C _j	220		80						pF		
Typical Thermal Resistance ⁽²⁾	R _{θJA}	85							°C/W			
Operating Junction Temperature Range	T _j	-55 ~ +125							°C			
Storage Temperature Range	T _{stg}	-55 ~ +150							°C			

(1) Measured at 1 MHz and applied reverse voltage of 4 V.D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



Fig.1 Forward Current Derating Curve

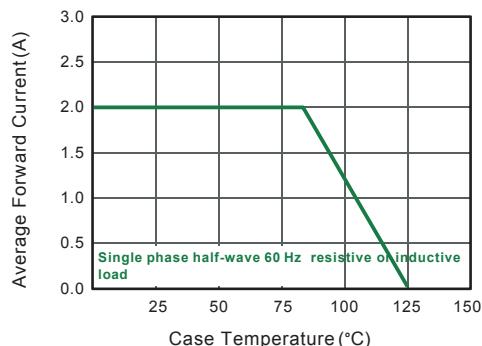


Fig.2 Typical Reverse Characteristics

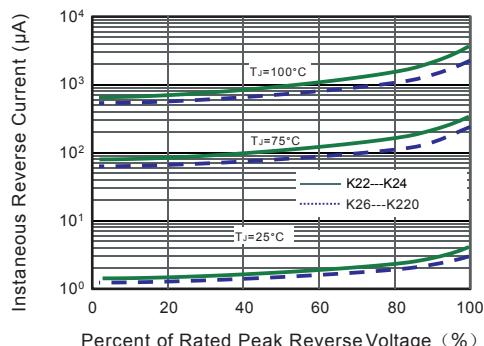


Fig.3 Typical Forward Characteristic

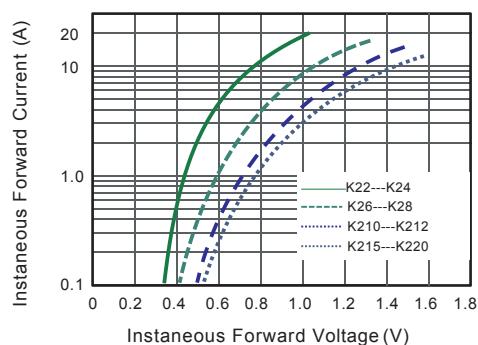


Fig.4 Typical Junction Capacitance

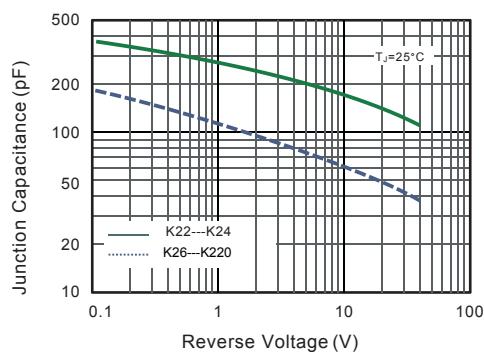


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


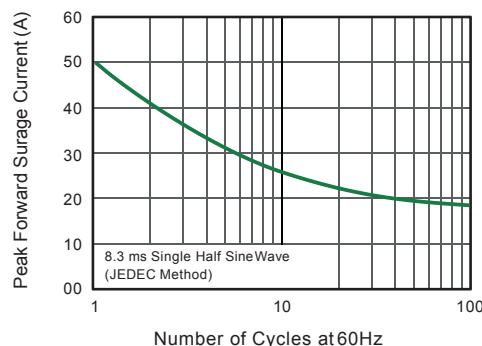


Fig.6- Typical Transient Thermal Impedance






RoHS
COMPLIANT

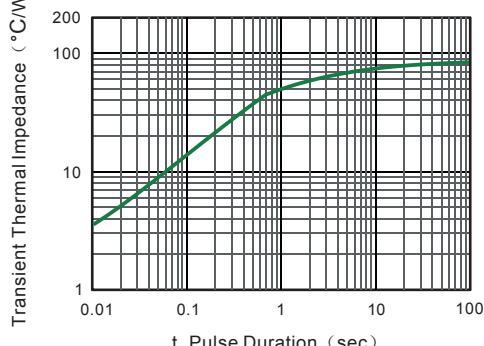

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

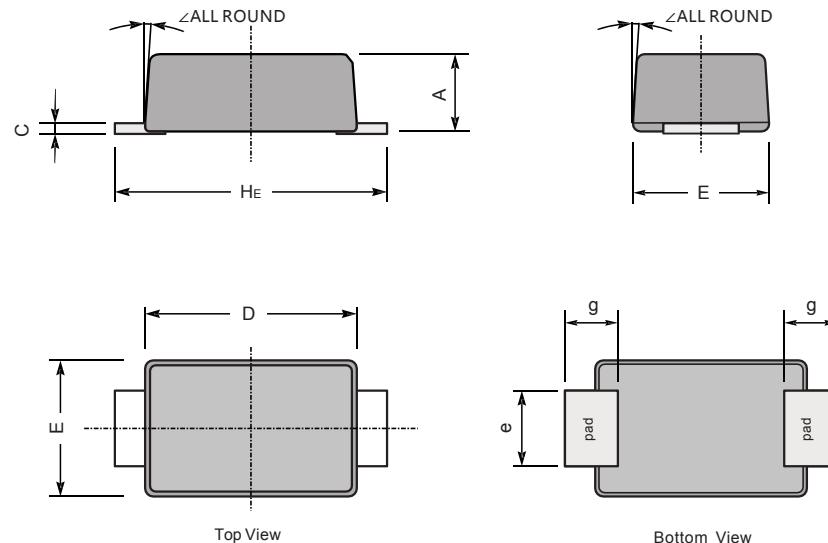

UNIT		A	C	D	E	e	g	B	∠
mm	max	1.15	0.20	2.8	1.9	1.2	0.9	3.8	5°
	min	0.95	0.12	2.5	1.7	0.9	0.7	3.5	
mil	max	45	7.9	110	75	47	35	150	5°
	min	37	4.7	98	67	35	28	138	

The recommended mounting pad size

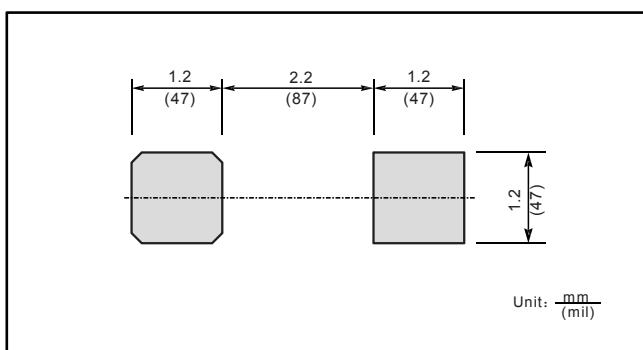

Marking

Type number	Marking code
K22	K22
K24	K24
K26	K26
K28	K28
K210	K210
K212	K212
K215	K215
K220	K220