

REV.	LOCAS.	DESCRIPTION	DRAW.	DATE.
01	NEW	INITIAL RELEASE.	Junly	2010.08.16
04	△4	ECN20120030	Huang	2012.07.13
05	△5	ECN20120035	Huang	2012.08.18
06	△6	ECN20120039	Huang	2012.09.12

NOTES:

1. MATERIAL:

1.1 Housing:High Temperature Thermoplastic
UL94V-0; Color Black.

1.2 Terminal:Copper Alloy.

1.3 Stator:Copper Alloy

2. SPECIALITY:

2.1 Rated current:2.0A

2.2 Rated voltage:30V

2.3 Contact Resistance:50mΩ MAX

2.4 Insulation Resistance:100MΩ MIN 100V DC



2.5 Dielectric withstanding voltage: 100V AC.

2.6 Solder ability:235±5℃, 5±0.5s.

2.7 Durability:5000 Cycles Min.

2.8 Operating condition:Temperature: -30℃~+80℃;
Humidity: 80% R.H MAX

Ordering Information

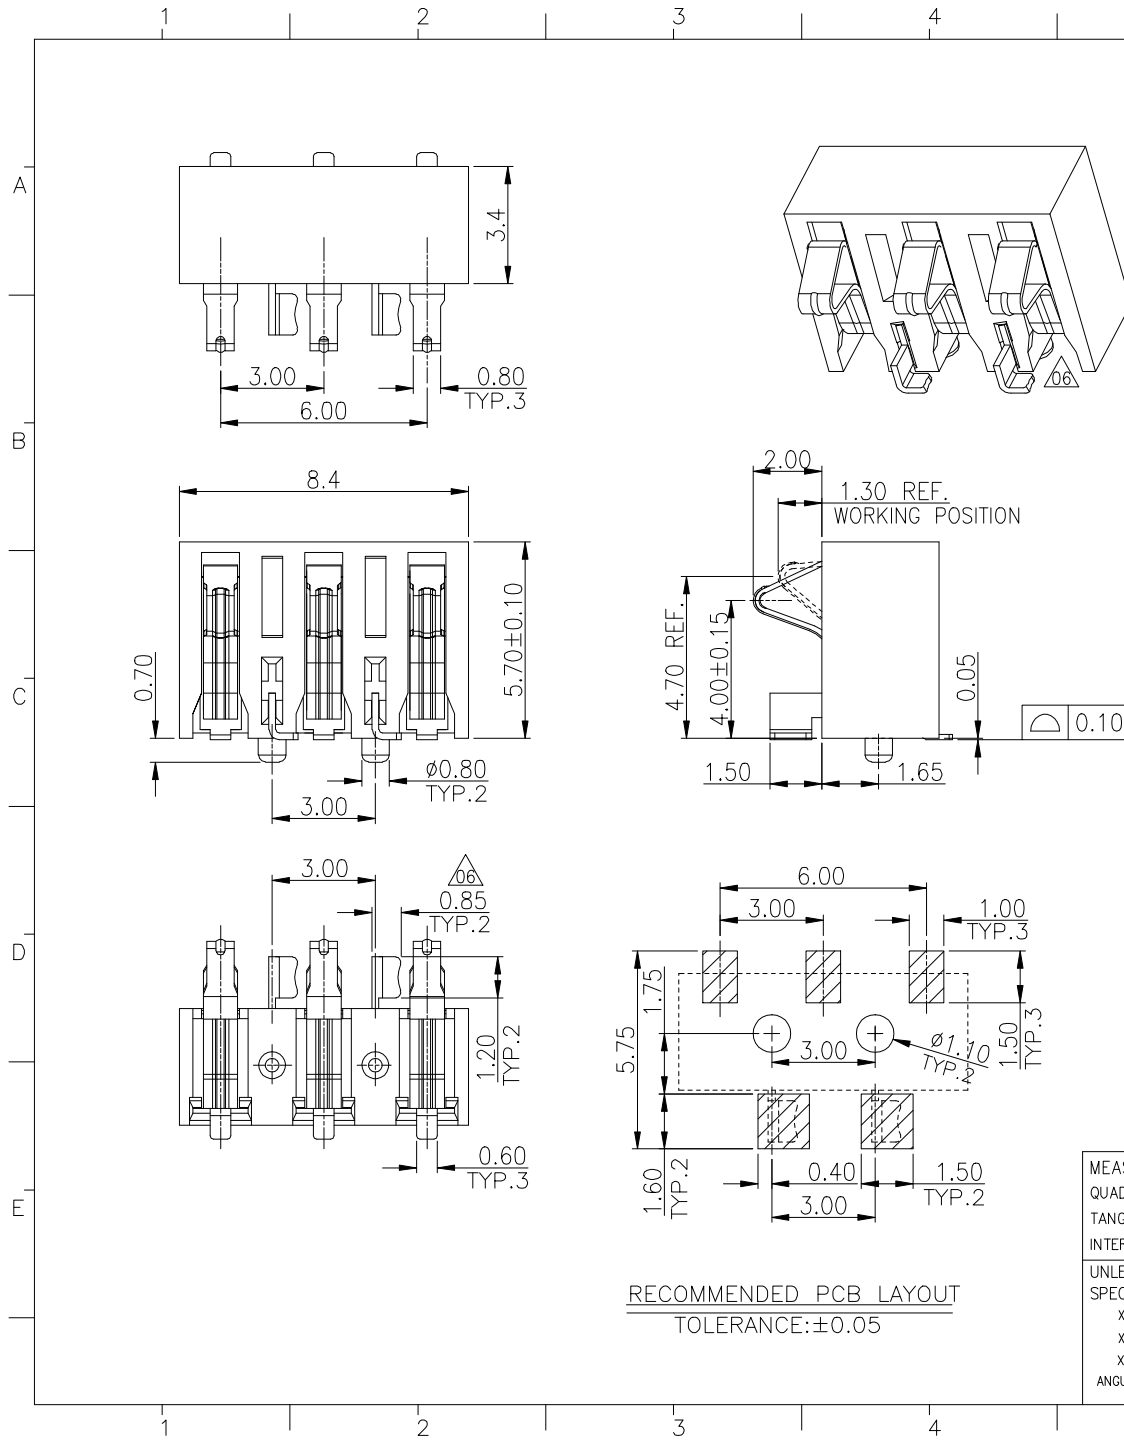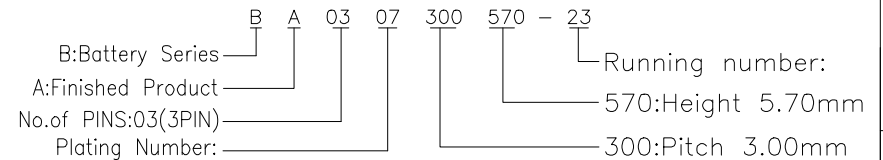

MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)	SHEN ZHEN D-CHAIN TECHNOLOGY CO.,LTD				
UNLESS OTHERWISE SPECIFIED,TOLERANCE:	DESING	Huang	DATE	2012.09.12	TITLE:
X. ±0.25	CHECKED	Andy.L	DATE	2012.09.12	BATTERY 3PIN PH:3.00mm H:5.70mm SMT TYPE WITH 2 POST
X.x ±0.20	APPROVED	Andy.L	DATE	2012.09.12	
X.xx ±0.15	PART NO:	BA0307300570-23			REV: 06
ANGULAR ±3'	DRAWING NO:	DQBA0307300570-23			SCALE: 5:1
					UNIT: mm
					SHEET: 1/1