
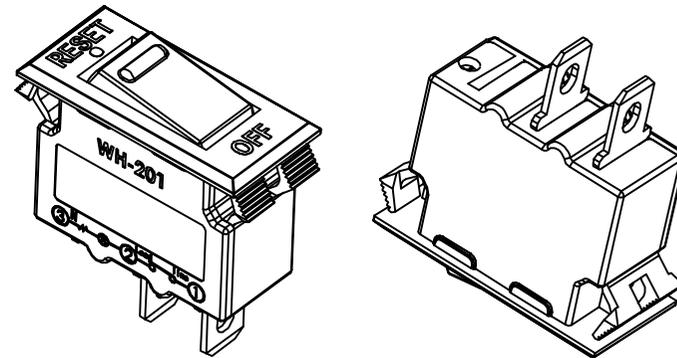


3~16A  
额定电流

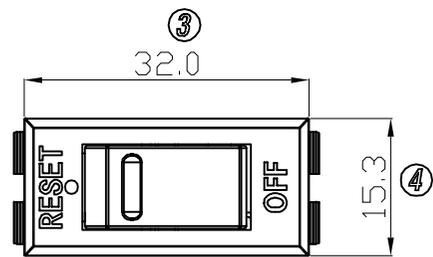


技术参数:

- 1、额定电器性能: 3~16A 125/250VAC (UL;CUL);
- 2、动作时间标准: 环境温度25℃电流200% (6~32A) 时3到60秒内断开;
- 3、耐压: 1500VAC/0.5mA/1min无闪络、无击穿;
- 4、机械寿命: ≥10000次;
- 5、耐焊时间: ≤3秒焊接温度350±10℃。

品名	基座颜色	上盖颜色	端子类型
WH-201-**BR01W2-R	黑色	暗红色	中长脚
WH-201-**BR01W3-R	黑色	暗红色	长脚
WH-201-**BB01W3-R	黑色	黑色	长脚
WH-201-**WB01B3-R	白色	黑色	长脚


WH-001-\*\*\*\*\*-R  
 额定电流: 03~16A      端子类型

端子类型 (参考)

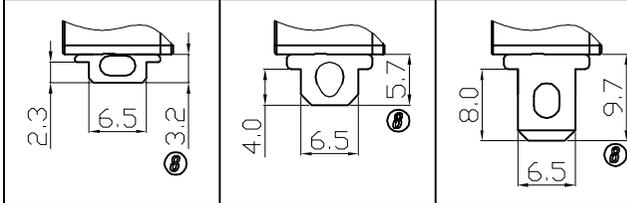

1 短脚      2 中长脚      3 长脚

开孔尺寸参考



THICKNESS	DIMENSION A
0.8~1.0	29.0 <sup>+0.1</sup> <sub>0</sub>
1.1~1.4	29.5 <sup>+0.1</sup> <sub>0</sub>
1.5~2.5	30.0 <sup>+0.1</sup> <sub>0</sub>

NO	DESCRIPTION	NO	DESCRIPTION	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM	DRAWING NO.	REV.
				RANGE	TOLERANCE					SCALE	NO		
△5	→	△10	→									WIF119008	A1
△4	→	△9	→										
△3	→	△8	→	X	±0.30								
△2	34.4 → 33.9 <sub>2020.12.07</sub>	△7	→	X.X	±0.20								
△1	28.2 → 28.4 <sub>2020.12.07</sub>	△6	→	X.XX	±0.10								
				ANGLES	±1°	LEGIION ELECTRONIC & HARDWARE CO., LTD.				WH-201-15BR01W3-R			

LMC  
2019.03.18

