

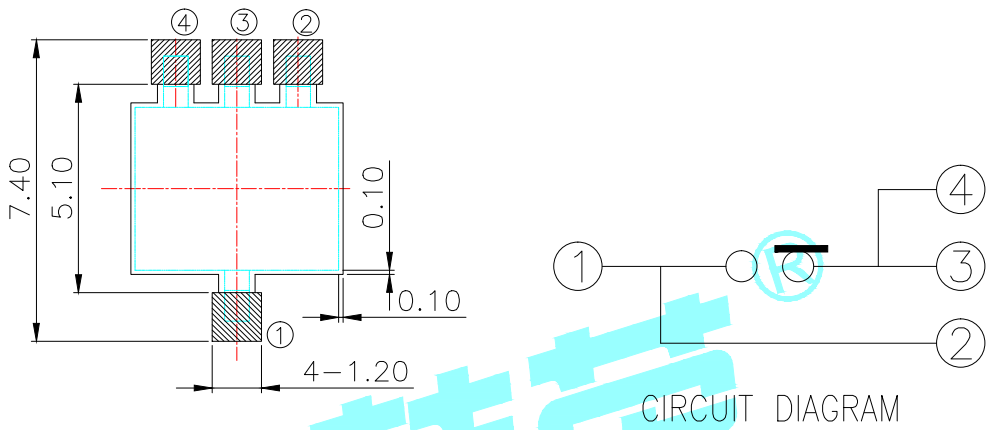


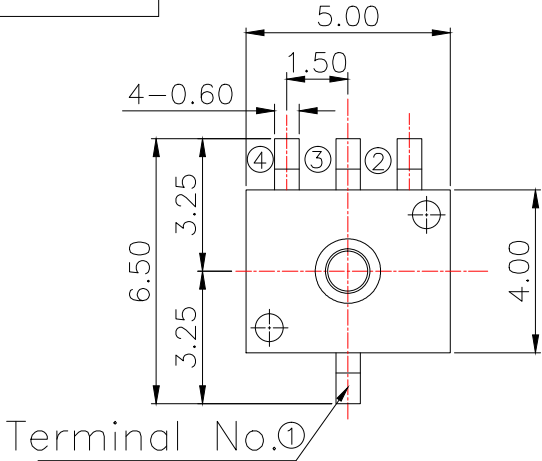

P.C.B LAYOUT
TOP VIEW

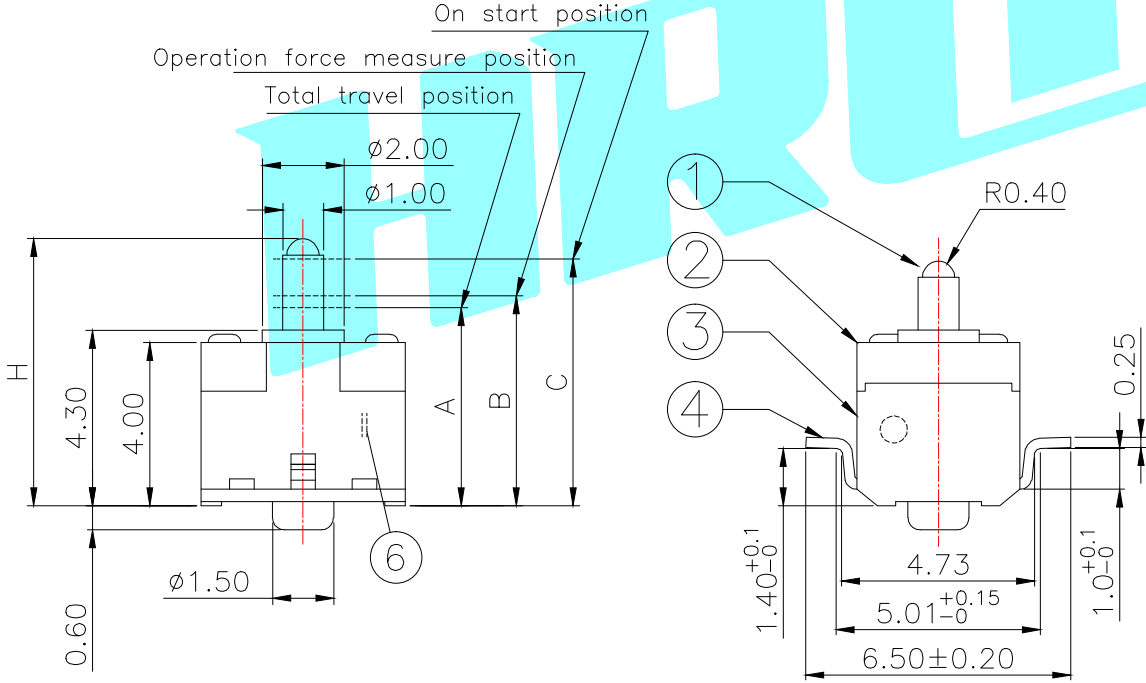

NOTE:
Rating: DC 30V 0.1A
Operating Force: 35±10gf
Lifetime: 100,000 Cycles

PART NO.	H	A	B	C
K5-1611SA-05	6.5±0.3	4.85Max	5.15	6.05
K5-1611SA-06	8.0±0.3	6.35Max	6.65	7.55

⑥	Spring	—	1	SUS0.17	—	—
⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Brass	Ag Plated	—
③	Base	—	1	PA46	Black	—
②	Cover	—	1	PA46	Black	—
①	Slider	—	1	PA46	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HROELECTRONICS CO.,LTD	
DRAWN	LIUCAN	2021.5.12	TITLE:		DETECTOR SWITCHS	
CHECKED			PART NO.			
APPROVALS			UNIT: mm		SCALE: 1:1	
TOLERANCES ARE			30~以上	±0.30	ANGLE	UNIT: mm
			10~30	±0.20	±2'	SCALE: 1:1
			5~10	±0.15		SCALE: 1:1
			~ 5	±0.10		SCALE: 1:1
			DRAWING NO.		SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			