
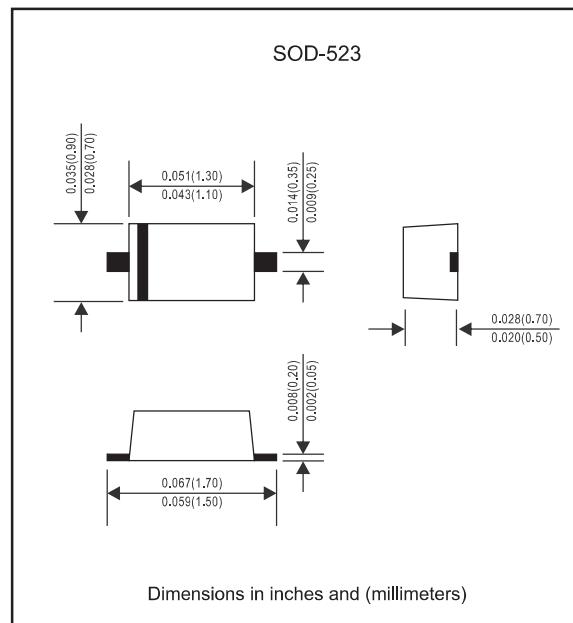


Package outline

FEATURES

- Small surface mounting type
- Low reverse current and low forward voltage
- High reliability

MARKING: 5



Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25°C

Parameter	Symbol	Limit		Unit
Peak reverse voltage	V _{RM}	40		V
DC reverse voltage	V _R	40		V
Mean rectifying current	I _o	30		mA
Non-repetitive Peak Forward Surge Current@t=8.3ms	I _{FSM}	200		mA
Power dissipation	P _D	150		mW
Thermal Resistance Junction to Ambient	R _{θJA}	667		°C/W
Operating Junction Temperature Range	T _j	-40 ~ +125		°C
Storage Temperature Range	T _{stg}	-55 ~ +150		°C

Electrical Ratings @Ta=25°C

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Reverse voltage	V _(BR)	40			V	I _R =1mA
Forward voltage	V _F	0.20		0.37	V	I _F =1mA
Reverse current	I _R	0.01		0.5	μA	V _R =30V
Capacitance between terminals	C _T	0.5	2	10	pF	V _R =1V,f=1MHZ

Typical Characteristics

