
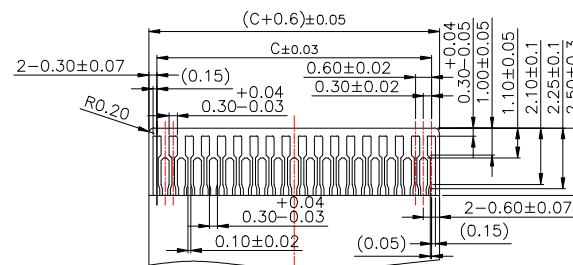
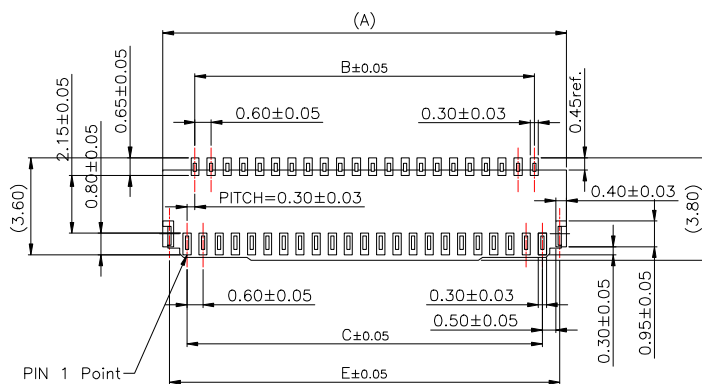




Part No	Pin	A	B	C	D	E
FPC-0.3FX-57PWBH10	57	18.60	16.20	16.80	17.45	18.10
FPC-0.3FX-61PWBH10	61	19.80	17.40	18.00	18.65	19.30
FPC-0.3FX-67PWBH10	67	21.60	19.20	19.80	20.45	21.10
FPC-0.3FX-71PWBH10	71	22.80	20.40	21.00	21.65	22.30

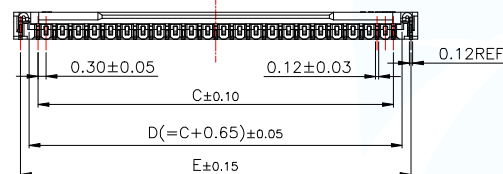


NOTES:

- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:BLACK;
COVER: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:BLACK;
TERMINAL: COPPER ALLOY;
PEG: COPPER ALLOY;
- PLATING:
2.1 TERMINAL CONTACT&SOLDER AREA:
60u" MIN. NICKEL UNDERPLATING OVERALL.
G:GOLD(1u" Min) FLASH PLATED SELECTIVELY.
T:3u" GOLD ON CONTACT AND SOLDER TAIL AREA
PLATED SELECTIVELY.
2.2 PEG: 100u"~200u" MATT TIN PLATED ON NICKEL.
60u"~160u" NICKEL OVERALL.
- RATING:
CURRENT RATING: 0.3A AC/DC
VOLTAGE RATING: 30V AC/DC
TEMPERATURE RANGE: -55°C~+85°C;


↑
FFC/FPC INSERT DIRECTION
RECOMMEND PCB LAYOUT

APPLICABLE FFC/FPC
FFC/FPC THICKNESS=0.20±0.03

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:FPC 0.3Pitch 1.0H ZIF R/A Connector
DECIMALS:	ANGLES:		PAR FPC-0.3FX-NPWBH10
.X:±0.25	X':±2°		DWN
.XX:±0.15	.X':±1°		CHKD
.XXX:±0.10			APVD
CUSTOMER COPY		SCALE1:1	UNIT:MM
		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A

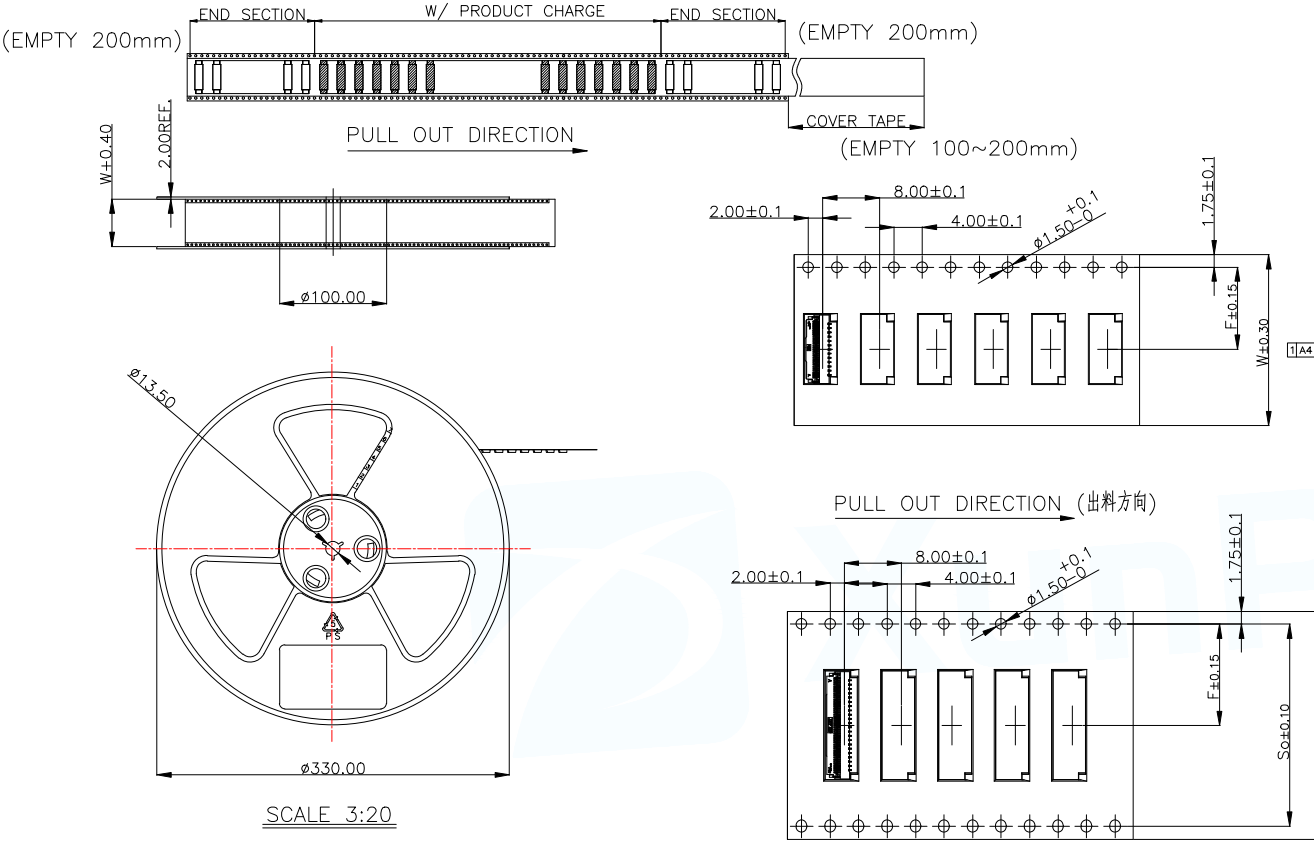

- NOTES:
1. ALL DIMENSION MEET EIA-481-3 REQUIREMENTS;
 2. CARRIER MATERIAL: PS, BLACK;
 3. PACKING QULITY: 5000PCS/REEL;

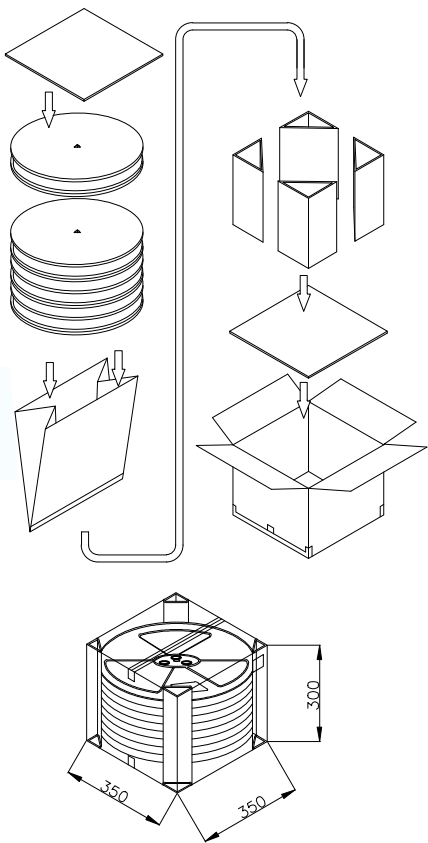

PACKING DISCRIPTION:

PIN No.			57~67	71
REEL WIDTH			32.4	44.4
PCS/REEL			5000	5000
REEL/BOX			7	6
BOX/PCS			35K	30K
CTN. SIZE	350*350*300			

PIN NO.	DIM W	DIM F	DIM So
57~67	32.0	14.20±0.10	28.4
71	44.0	20.20±0.15	40.4

MANUFACTURE DWG			东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:FPC 0.3Pitch 1.0H ZIF R/A Connector	
DECIMALS:	ANGLES:		PAR	FPC-0.3FX-NPWBH10
.X:±0.30	.X':±5°		DWN	
.XX:±0.20	.XX':±2°		CHKD	
.XXX:±0.05	.XXX':±1°	APVD		
CUSTOMER COPY		SCALE1:1	UNIT:MM	REV:A
		SIZE:A4	SHEET:1F1	