
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- 1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
- 2. SEE CURRENT CATALOG FOR PIGTAIL LENGTHS AND PACKAGE QUANTITY.
- 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
- 4. TESTED TO EIA/TIA 568-B.3.
- 5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

JACKETED MULTI FIBER RISER RATED 900um TIGHT BUFFERED FIBER OPTIC DISTRIBUTION CABLE

> PRETERMINATED FJ-JACK FIBER OPTIC PIGTAIL CUSTOMER DRAWING

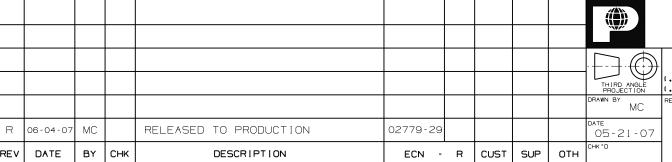

- FJ-JACK

CORP. TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE:

(.XXX) :.010 (0.3) SCALE

(.XX) ± .03 [0.8] ANGLES REVIEW DRAWING NUMBERS

M02779BY_DC_00A.prt

NONE

SEE TABLE, SHT. 2 DRAWING NO. SIZE 02779-29

(SHT. 1 of 2)

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PRETERMINATED FJ-JACK FIBER OPTIC PIGTAIL											
PANDUIT		CABLE	FJ-JACK								
PART NO.	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	RL	COLOR				
F68D6J-NM*Y	RISER	62.5/125∪m OM1	8	ORANGE	0.30dB	20dB	ELECTRIC IVORY				
F98D6J-NM*Y	(OFNR)	9/125um 051	8	YELLOW	0.75dB	55dB	BLUE				

* - DENOTES PIGTAIL LENGTH, WHERE M = METERS AND F = FEET

								PRETERN	RETERMINATED FJ-JACK FIBER OPTIC PIGTAIL CUSTOMER DRAWING				
								THIDD ANGLE	TINLEY PARK, ILL ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: [.XX]::.010 [0.3] [.XX1::.03 [0.8] ANGLES	DRAWING FILENAME MO2779BY_DC_00A.p.	ort		
									REVIEW DRAWING NUMBERS	SEE TABLE DRAWING NO.			
REV	06-04-07 DATE	 СНК	RELEASED TO PRODUCTION DESCRIPTION	02779-29 ECN -	 CUST	SUP	ОТН	05-21-07		02779-29 (SHT. 2 of 2)	\ \ 		

 $\mathbf{\Phi}$