



Extract from the online
catalog

EMG 10-OV-110DC/24DC/1

Order No.: 2944245

The illustration shows version EMG 10-OV, with DC voltage output, max. 1 A



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944245>

Power optocoupler, with light indicator and protection circuits in the
input and output circuits, input: 110 V DC, output: 5-36 V DC/ max. 1 A

Commercial data

EAN	4017918081546
Pack	10 pcs.
Customs tariff	85364900
Weight/Piece	0.04053 KG
Catalog page information	Page 128 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
06/07/2007



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

Input data

Nominal input voltage U_N	110 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Switching threshold "0" signal, voltage	≤ 23 V
Switching threshold "0" signal in reference to U_N	≤ 0.23
Switching threshold "1" signal voltage	≥ 47 V

EMG 10-OV-110DC/24DC/1 Order No.: 2944245
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944245

Switching threshold "1" signal in reference to U_N	≥ 0.9
Typical input current at U_N	4 mA
Typical response time	0.1 ms
Typical turn-off time	0.2 ms
Status display	Yellow LED
Name of protection	Polarity protection
Protective circuit/component	Polarity protection diode
Transmission frequency	500 Hz

Output data

Output nominal voltage	24 V DC
Output nominal voltage range	5 V DC ... 36 V DC
Limiting continuous current	1 A
Surge current	2 A (t = 1 s)
Peak offstate voltage	45 V DC (Collector-emitter reverse voltage)
Voltage drop at max. limiting continuous current	≤ 1 V
Output circuit	2-conductor floating
Name of protection	Polarity protection
Protective circuit/component	Polarity protection diode

Connection data

Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

General data

Width	10 mm
Height	102 mm
Depth	75 mm
Test voltage input/output	3.5 kV AC
Ambient temperature (operation)	-20 °C ... 50 °C

EMG 10-OV-110DC/24DC/1 Order No.: 2944245
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944245

Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing
Operating mode	100% operating factor
Degree of protection	IP20
Inflammability class in acc. with UL 94 (housing)	V0
Standards/regulations	DIN VDE 0110
Rated surge voltage / insulation	Basic insulation

Certificates / Approvals




Certification


GOST

Drawings

Diagram

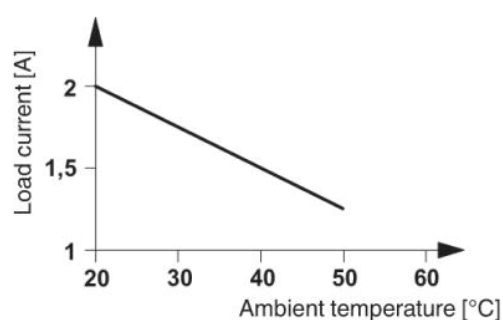

Circuit diagram

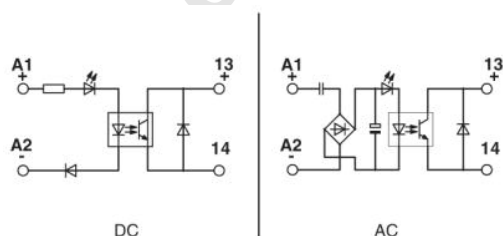

EMG 10-OV-110DC/24DC/1 Order No.: 2944245
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944245>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com