

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5



6

7



8

9

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
05	△△	變更圖號與注解	2011.08.08	黃明霞
06	△△	方膠紙很難粘貼，改用圓點膠紙	2013.03.29	顏德金
07	△△	依業務要求，圖面新增下插式LAYOUT	2014.07.30	邱國強

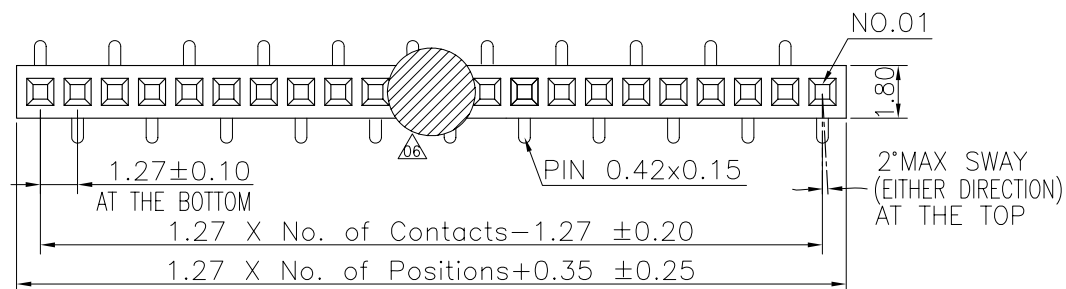

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
△△ Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP △△ or the equivalent material
All materials must meet Greenconn hazardous substances control standards.

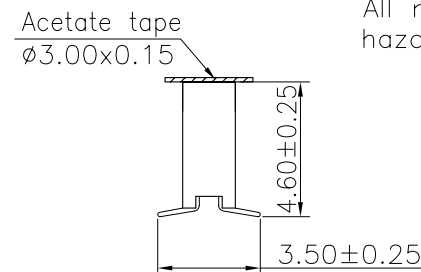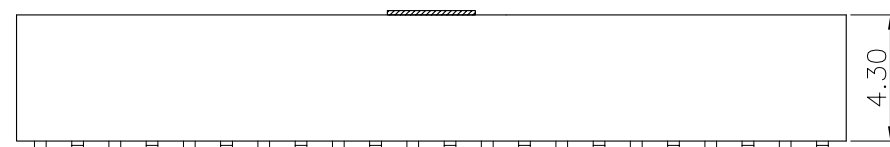

△△ Ordering Information

C SEC102 - XX XX A 001 C 1 A X


No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin


Color
1=Black

Standard Packing
C=Tube
Selective Packing
D=Tape&Reel
G=Acetate tape+Tube
H=Acetate tape+T&R

Recommended P.C.Board Layout
FOR TOP ENTRY
(Tolerance:±0.05)



Recommended P.C.Board Layout
FOR BOTTOM ENTRY
(Tolerance:±0.05) △△



格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED: 邱國強	DATE: 2014.07.30
CHECKED: 曹 熙	DATE: 2014.07.30
CO SIGNED: 劉北平	DATE: 2014.07.30
APPROVED: 李 輝	DATE: 2014.07.30

DWG. NO. △△	CSEC102-CA1CA
PART NO. △△	CSEC102-XXXX A001C1AX

TITLE.
1.27 FEMALE HEADER
SINGLE ROW SMT TYPE
BASE 4.30H

1

2

3

4

5

6

7

8

9