

## Straight Blade Devices

### 2 Pole, 3 Wire Grounding

15 and 20 Ampere, 125 Volts

### INSULGRIP® Connector Bodies



HBL5269C



HBL8219C



NEMA 5-15R  
15A 125V  
UL CSA

NEMA 5-20R  
20A 125V  
UL CSA

#### Insulgrip Connector Bodies

Description	Cord Dia.	Catalog Numbers	
Black and white nylon.	.230"-.720" (5.8-18.3)	HBL5269C™	HBL5369C™
Corrosion resistant yellow nylon.	.230"-.720" (5.8-18.3)	HBL52CM69C	HBL53CM69C

#### Insulgrip Hospital Grade Connector Bodies

Description	Cord Dia.	Catalog Numbers	
Black and white nylon.	.230"-.720" (5.8-18.3)	HBL8219C™	HBL8319C
Transparent housing.	.230"-.720" (5.8-18.3)	HBL8219CT	HBL8319CT

#### Accessories

Seat-Tite® triple seal black elastomer cover for Insulgrip® connector bodies when used in a cord set.	HBL6018*
Same as above except yellow.	HBL60CM18*
Closure plug, black.	HBL6019
Closure plug, yellow.	HBL60CM19
PLUGOUT® lockout device for Hubbell plugs and others.	HLD

Notes: \*IP55 suitability if closure plug inserted or when installed and used properly with HBL6017 or HBL60CM17.

# Straight Blade Devices

## 2 Pole, 3 Wire Grounding

15 and 20 Ampere, 250 Volts

### Connector Bodies and Flanged Receptacles



**IP20**  
SUITABILITY




NEMA 6-15R  
15A 250V  
UL CSA



NEMA 6-20R  
20A 250V  
UL Listed

#### Connector Bodies

Description	Cord Dia.	Catalog Numbers	
Insulgrip® connector body, black and white nylon, multiple drive screws.	.230"-.720" (5.8-18.3)	<b>HBL5669C</b>	<b>HBL5469C</b>
ERGO™ Grip connector body, overmolded yellow nylon.	.220"-.600" (5.6-15.25)	<b>HBL5567EY</b>	<b>HBL5579EY</b>
Valise® connector body, yellow nylon.	.220"-.660" (5.6-16.8)	<b>HBL5669VY</b>	<b>HBL5469VY</b>



**HBL5669C**




**HBL5567EY**

#### ERGO™ Grip Hospital Grade Connector Bodies

Description	Cord Dia.	Catalog Numbers	
Overmolded white nylon.	.300"-.600" (7.6-15.25)	<b>HBL8567E</b>	<b>HBL8579E</b>

#### Valise® Hospital Grade Connector Body

Description	Cord Dia.	Catalog Number	
White nylon.	.300"-.660" (7.6-16.8)	-	<b>HBL8469V</b>

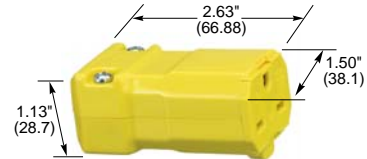

**HBL5669VY**



**HBL5679C**




NEMA 6-15R  
15A 250V  
UL CSA



NEMA 6-20R  
20A 250V  
UL Listed

#### Flanged Receptacles

Description	Catalog Numbers	
Nylon casing, multiple drive screws.	<b>HBL5679C</b>	<b>HBL5479C</b>
Stainless steel flange, brown phenolic housing (mounting screws packaged separately).	<b>HBL5656</b>	-



**HBL5656**