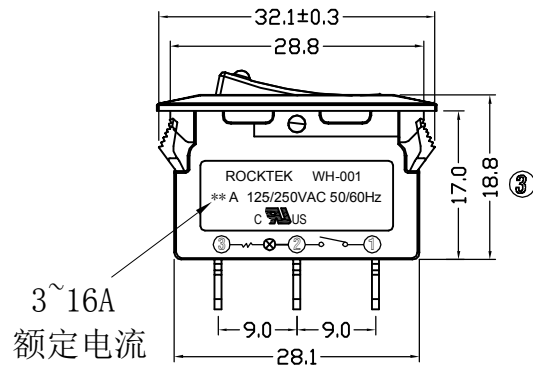


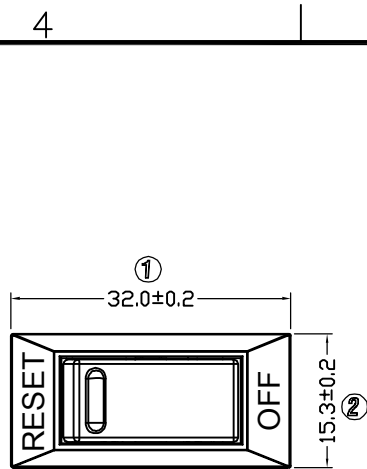






品 名	基座	上盖	端子类型	带灯类型
WH-001-**BR01N3-L22-E	黑色	暗红色	长脚	带红灯
WH-001-**BR01N2-L22-E	黑色	暗红色	中长脚	带红灯
WH-001-**BR01N1-L22-E	黑色	暗红色	短脚	带红灯
WH-001-**WC01B2-L62-E	白色	透明色	中长脚	带黄灯
WH-001-**WC01B3-L22-E	白色	透明色	长脚	带红灯
WH-001-**WC01B2-L22-E	白色	透明色	中长脚	带红灯
WH-001-**WC01B1-L22-E	白色	透明色	短脚	带红灯

WH-001-*****-***-A
额定电流: 03~16A 端子类型

端子类型 (参考)

		
1 短 脚	2 中长脚	3 长 脚

开孔尺寸参考



THICKNESS	DIMENSION A
0.8~1.0	29.0 ^{+0.1} ₀
1.1~1.4	29.5 ^{+0.1} ₀
1.5~2.5	30.0 ^{+0.1} ₀

技术参数:

- 1、额定电器性能: 3~16A 250VAC (UL;CUL) ;
- 2、动作时间标准: 环境温度25℃ 电流200% (6~32A) 时3到60秒内断开;
- 3、耐压: 1500VAC/0.5mA/1min无闪络、无击穿;
- 4、机械寿命: ≥10000次;
- 5、耐焊时间: ≤3秒焊接温度350±10℃。

电话: 0769-82310511-867
邮箱: hooya89@hooya.hk

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN LMC 2020.11.15	ALL SIZE ARE IN		MM		
4	→	9	→	RANGE	TOLERANCE					SCALE		NO		
3	→	8	→	X	±0.30					MAT'L		***		
2	→	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.	
1	→	6	→	X.XX	±0.10					WH-001-*****-***-E		WIF121065	A0	
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.								