
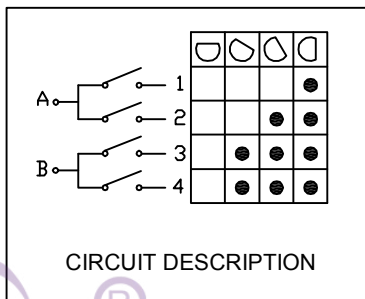


4 3 2 1

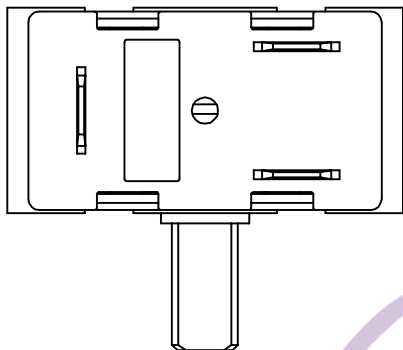

NOTES:

1. 额定值 RATING: 16A 125/250VAC 40T125 (UL, C-UL; ENEC17; N; CQC)  
26(6)A 125/250VAC 40T125 (UL, C-UL; ENEC17; N; CQC)  
16A 42VDC 40T125 (UL, C-UL; ENEC17; N; CQC)
2. 功能 FUNCTIONAL: 见电路图 SEE CIRCUIT DESCRIPTION
3. 接触电阻 CONTACT RESISTANCE: <50mΩ
4. 绝缘电阻 INSULATION RESISTANCE: >100MΩ (500VDC BETWEEN OPEN CONTACTS)
5. 耐电压 DIELECTRIC STRENGTH: >1500VAC 0.5mA 1 MINUTE

D


D

C

C

B

B

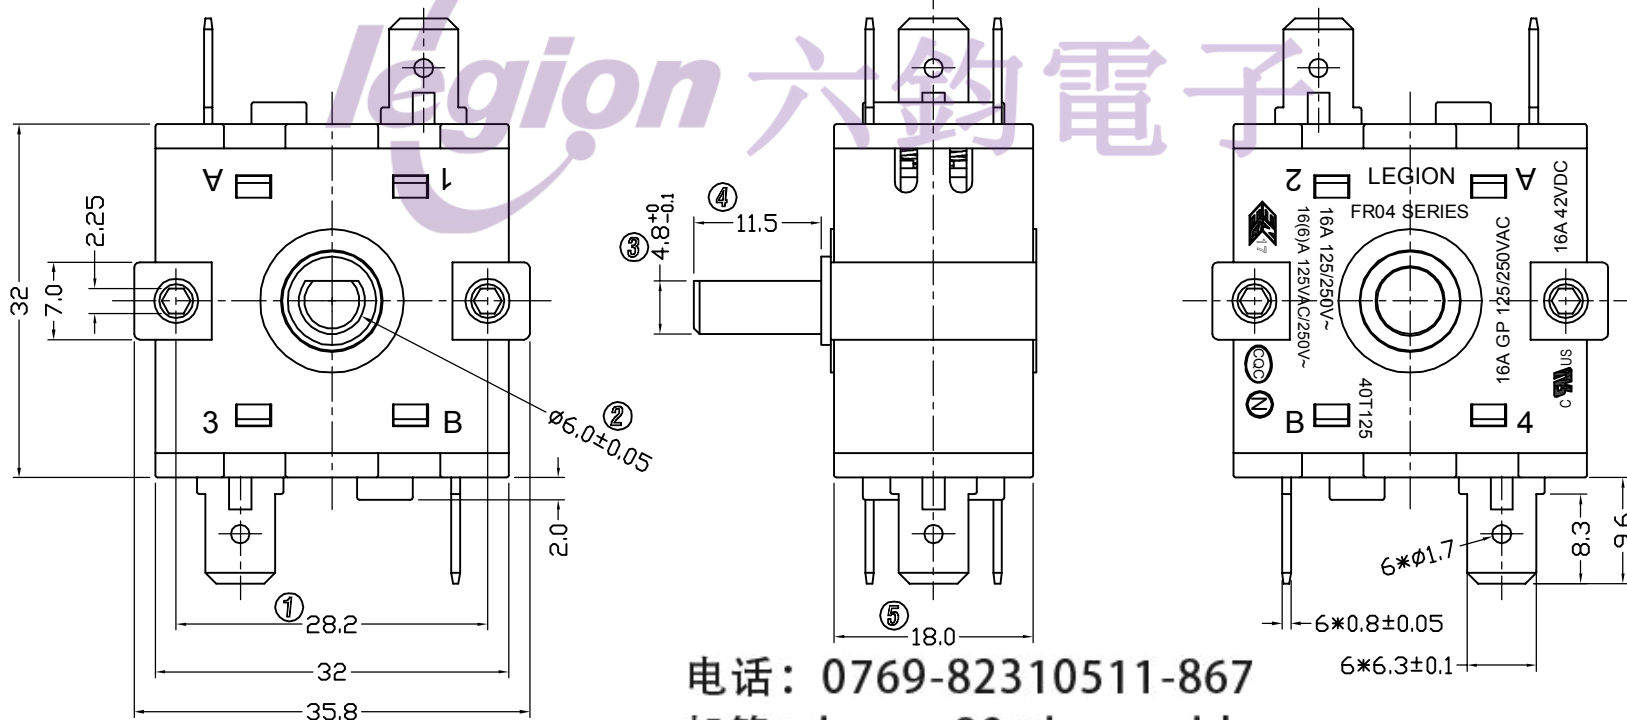

电话: 0769-82310511-867  
邮箱: hooya89@hooya.hk

A

A

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM			
4	→	9	→	RANGE	TOLERANCE				LMC	SCALE	NO			
3	→	8	→	X	±0.30				2019.05.20	MAT'L	***			
2	→	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.	
1	→	6	→	X.XX	±0.10							FR04-322B3Q16L-R	*****	A0
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'	LEGION ELECTRONIC & HARDWARE CO., LTD.								

4 3 2 1