HSF RoHS c UL us CE

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		NEW		21.12.8

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 12A

2.Withstanding voltage : AC1600V/1Min.

4.Wire range : 28~14AWG

IEC Standard

1.

Pollution degree	2	2	3
Overvoltage category	Ⅱ	Ⅲ	Ⅲ
Rate impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	500V	320V	320V
Rate current(A)	17.5A		

2.Wire range : 0.2~1.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.00mm, Poles : N=02~24P

3.Stripping length : 10mm

4.Operating temperature: -40°C~+130°C

5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ⌭
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

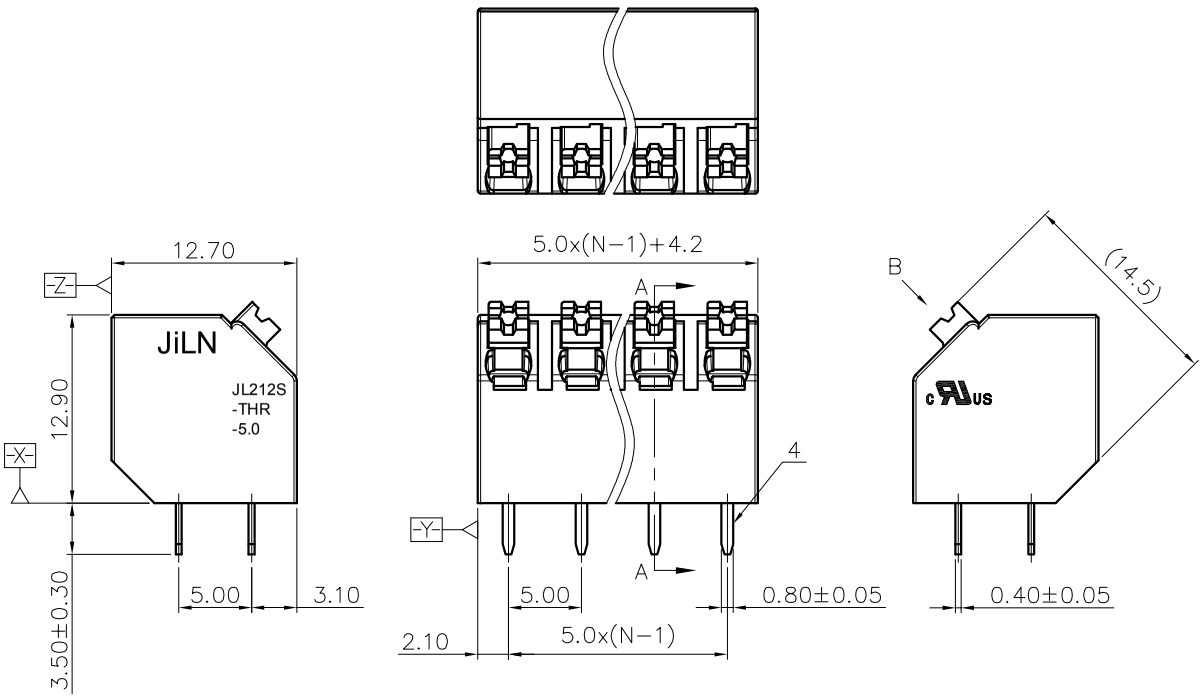

Ordering Information

JL212S- 500 XX B 0 1

- Pitch: 500=5.0PH
- No.of pins: 2P~24P
- Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
- Packing: 0=Pe bag, T=Tube, A=Tray

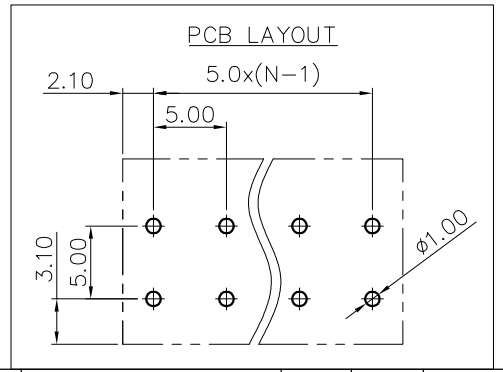

DRAW	SHUANGPING ZHENG	SCALE	FIT	JiLN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD
		UNIT	mm	
CHECK	LICHAN LIU	SIZE	A4	PART NO. JL212S-500XXB01
		SHEET	1/1	
APPROVE	YONGLIANG GAO	PROJ.		TITLE: JL212S-THR-5.0-XXP弹簧式/黑色