

**6A HIGH CURRENT SINGLE-PHASE SILICON BRIDGE RECTIFIER**

**Voltage - 100 to 1000 V**

**Forward Current – 6 A**




**FEATURES**

- ◆ High temperature metallurgically bonded internal rectifiers
- ◆ Typical IR less than .1 uA
- ◆ The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- ◆ High temperature soldering guaranteed 265 /10 seconds at 5 lbs (2.3kg) tension
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆ Case: KBPC
- ◆ Terminals: Solderable per MIL-STD-202, Method 208
- ◆ Weight: 3.8 grams (approx)

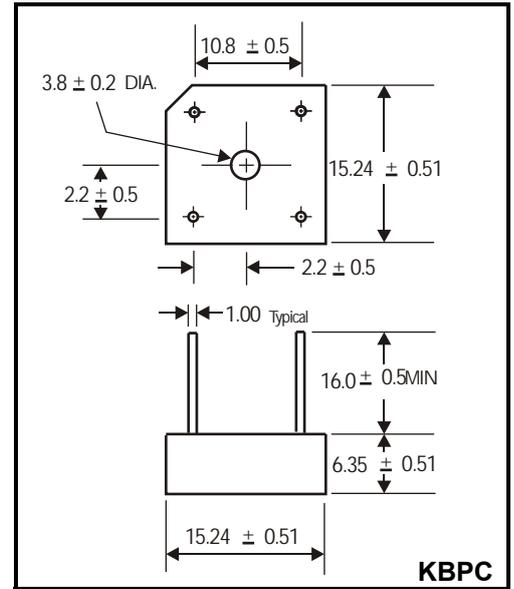


**Maximum Ratings And Electrical Characteristics**

Rating at 25 c ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz. For Capacitive load derate current by 20%.


Parameter	Symbols	KBPC601	KBPC602	KBPC604	KBPC606	KBPC608	KBPC610	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at TC=75°C(1)	$I_{(AV)}$	6.0						A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	125						A
Rating for fusing ( t<8.3ms)	$I_{2t}$	10						A <sup>2</sup> sec
Typical thermal resistance per element (2)	ReJA	9.4						C / W
Typical junction capacitance per element(3)	Cj	55						pF
Maximum instantaneous forward voltage drop per leg at 3.0A	$V_F$	1.1						V
Maximum DC reverse current at rated TA=25°C	$I_R$	10						μA
DC blocking voltage per element TA=100°C		1000						
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150						°C

- (1) Mounted on metal chassis.
- (2) Non-repetitive, for t>1ms and < 8.3ms.
- (3) Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


**Fig. 1 Derating Curve for Output Rectified Current**

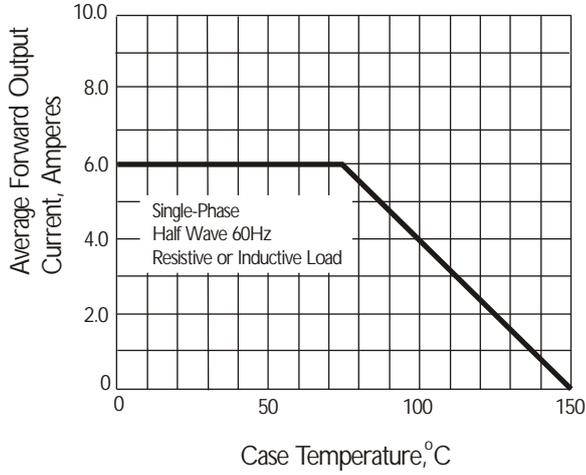


**Fig. 2 Maximum Non-repetitive Peak Forward Surge Current**

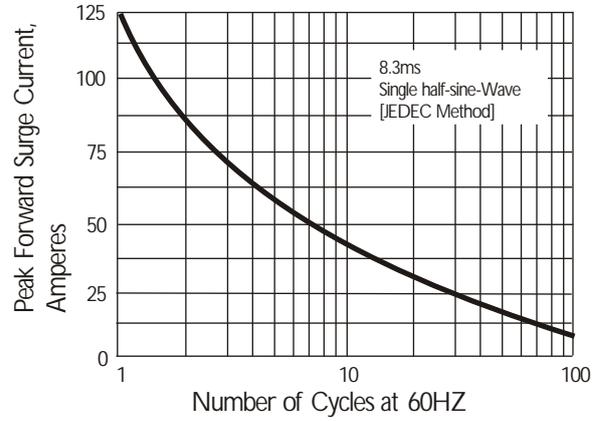


**Fig. 3 Typical Instantaneous Forward Characteristics**

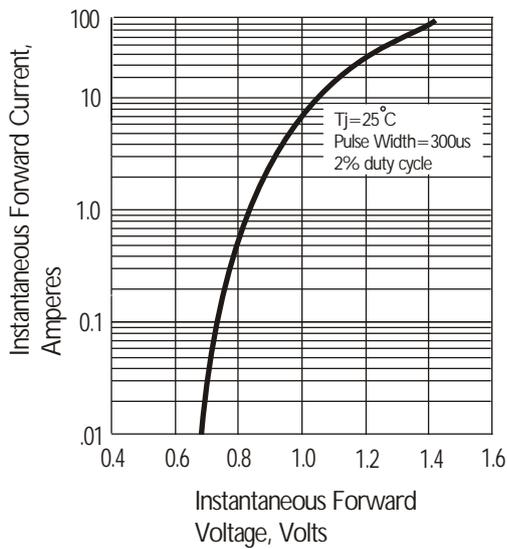

**Fig. 4 Typical Reverse Characteristics**

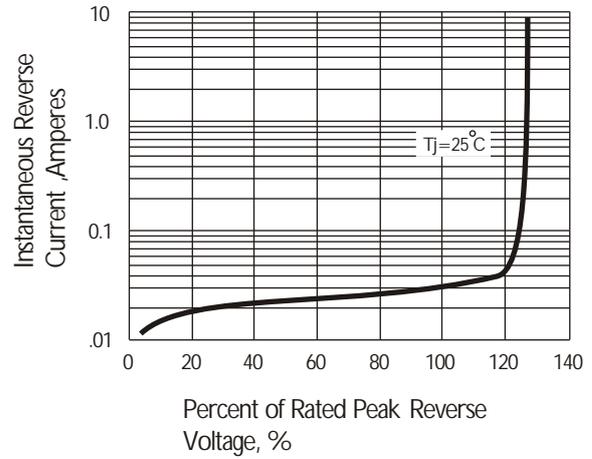

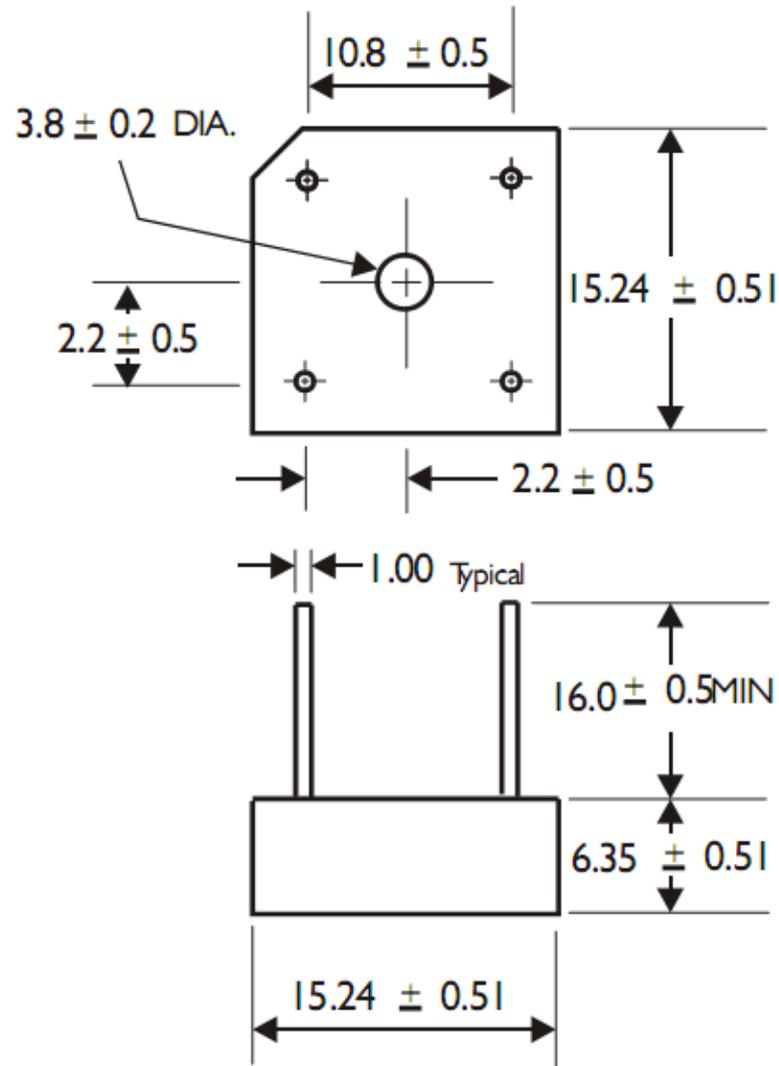

Dimensions in millimeters(1mm =0.0394")

**Summary of Packing Options**

Package	Package Description	Packing Quantity	Industry Standard
KBPC	BOX	200	EIA-481-1