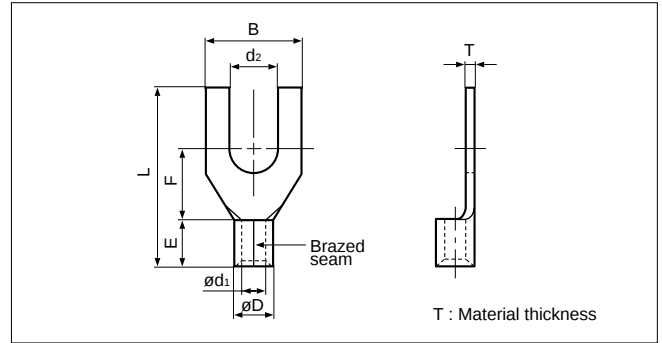



SPADE TONGUE (A type) Non-insulated

File No.: E42024 LR20812



Applicable Wire AWG#(mm ²)	Stud size		Part No.	Standard	Dimensions mm (in.)								Tool No.	Qty/box
	American	Metric			d ₂	B	L	F	E	ø D	ø d ₁	T		
26 to 22 (0.2 to 0.5)	1-2	2	0.5-2A		2.2 (.087)	4.6 (.181)	12.8 (.504)	4.5 (.177)	4.0 (.157)	2.0 (.079)	1.0 (.039)	0.5 (.020)	YHT-2622 YA-1 YA-2	1,000
	3-4	3	0.5-3A		3.2 (.126)	5.0 (.197)	12.5 (.492)	6.0 (.236)						
	5-6	3.5	0.5-3.7A		3.7 (.146)	6.4 (.252)	15.0 (.591)	7.7 (.303)						
	8	4	0.5-4A		4.3 (.169)	7.0 (.276)	16.2 (.638)	6.3 (.248)						
22 to 16 (0.25 to 1.65)	1-2	2	1.25-2A		2.2 (.087)	4.6 (.181)	14.6 (.575)	4.3 (.169)	4.8 (.189)	3.4 (.134)	1.7 (.067)	0.8 (.031)	YHT-2210 YA-1 YA-2 YA-4	1,000
	3-4	3	1.25-B3A		3.2 (.126)	5.8 (.228)	15.8 (.622)	6.3 (.248)						
	3-4	3	1.25-C3A		3.2 (.126)	5.6 (.221)	15.8 (.622)	6.3 (.248)						
	3-4	3	1.25-M3A		3.2 (.126)	6.35 (.250)	16.0 (.630)	8.0 (.315)						
	5-6	3.5	1.25-YS3A		3.7 (.146)	6.4 (.252)	15.4 (.606)	6.3 (.248)						
	5-6	3.5	1.25-S3A		3.7 (.146)	7.2 (.283)	15.8 (.622)	6.3 (.248)						
	5-6	3.5	1.25-N3A		3.7 (.146)	6.2 (.244)	15.8 (.622)	6.3 (.248)						
	8	4	1.25-YS4A		4.3 (.169)	6.4 (.252)	15.4 (.606)	6.3 (.248)						
	8	4	1.25-S4A		4.3 (.169)	7.2 (.283)	15.8 (.622)	6.3 (.248)						
	8	4	1.25-4A		4.3 (.169)	8.5 (.335)	15.8 (.622)	7.0 (.276)						
	10	5	1.25-5A		5.3 (.209)	9.5 (.374)	15.8 (.622)	7.0 (.276)						
	10	5	1.25-M5A		5.3 (.209)	8.5 (.335)	15.8 (.622)	7.0 (.276)						
	10	5	1.25-S5A		5.3 (.209)	7.2 (.283)	15.8 (.622)	6.3 (.248)						
	1/4	6	1.25-6A		6.4 (.252)	12.0 (.472)	22.0 (.866)	11.0 (.433)						
16 to 14 (1.04 to 2.63)	5-6	3.5	2-3A		3.7 (.146)	8.5 (.335)	16.8 (.661)	7.3 (.287)	4.8 (.189)	4.1 (.161)	2.3 (.091)	0.8 (.031)	YHT-2210 YA-1 YA-2 YA-4	1,000
	3-4	3	2-M3A		3.2 (.126)	6.0 (.236)	14.5 (.571)	5.0 (.197)						
	3-4	3	2-N3A		3.2 (.126)	5.9 (.232)	15.8 (.622)	6.3 (.248)						
	5-6	3.5	2-YS3A		3.7 (.146)	6.4 (.252)	15.4 (.606)	6.3 (.248)						
	5-6	3.5	2-S3A		3.7 (.146)	7.2 (.283)	16.0 (.630)	6.5 (.256)						
	8	4	2-YS4A		4.3 (.169)	6.4 (.252)	15.4 (.606)	6.3 (.248)						
	8	4	2-YM4A		4.3 (.169)	6.8 (.268)	15.4 (.606)	6.3 (.248)						
	8	4	2-S4A		4.3 (.169)	7.2 (.283)	16.0 (.630)	6.5 (.256)						
	8	4	2-4A		4.3 (.169)	8.5 (.335)	16.8 (.661)	7.3 (.287)						
	10	5	2-5A		5.3 (.209)	9.5 (.374)	16.8 (.661)	7.3 (.287)						
	10	5	2-M5A		5.3 (.209)	8.5 (.335)	16.8 (.661)	7.3 (.287)						
	1/4	6	2-6A		6.4 (.252)	12.0 (.472)	22.0 (.866)	11.0 (.433)						
12 to 10 (2.63 to 6.64)	5-6	3.5	5.5-S3A		3.7 (.146)	7.2 (.283)	19.5 (.768)	7.5 (.295)	6.8 (.268)	5.6 (.220)	3.4 (.134)	1.0 (.039)	YHT-2210 YA-1 YA-2 YA-4	1,000
	5-6	3.5	5.5-3A		3.7 (.146)	9.5 (.374)	19.5 (.768)	7.5 (.295)						
	8	4	5.5-S4A		4.3 (.169)	8.5 (.335)	19.5 (.768)	7.5 (.295)						
	8	4	5.5-4A		4.3 (.169)	9.5 (.374)	19.5 (.768)	7.5 (.295)						
	10	5	5.5-5A		5.3 (.209)	9.5 (.374)	19.5 (.768)	7.5 (.295)						
	1/4	6	5.5-6A		6.4 (.252)	13.5 (.532)	25.5 (1.004)	12.2 (.480)						
	5/16	8	5.5-8A		8.4 (.331)	13.5 (.532)	25.5 (1.004)	12.2 (.480)						500

Note:1) The part numbers indicated in the above table are for products with a brazed seam.

When ordering products with a butted seam, add the prefix "WS" to the part number (ex. 2-4A → **WS2-4A**).



SPADE TONGUE (A type) vinyl-insulated

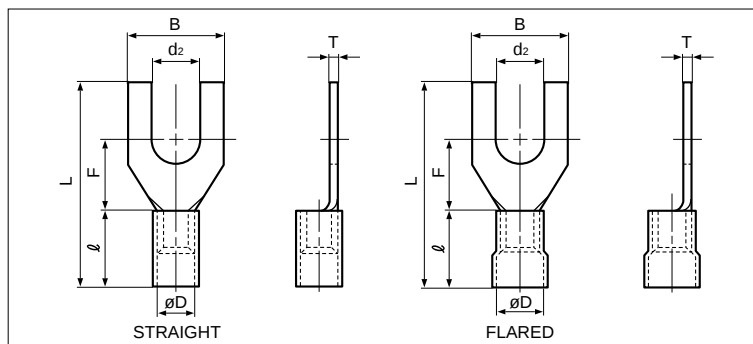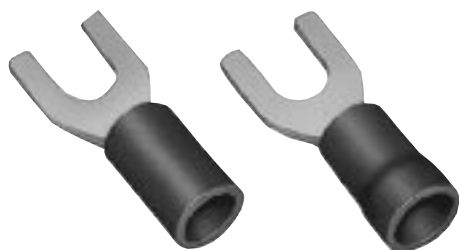


File No.: E42024 LR20812

Applicable Wire AWG#(mm²)	Stud size		Part No.		Standard	Dimensions mm (in.)								Color	Tool No.	Qty/box
	American	Metric	Straight	Flared		d₂	ø D		B	L	F	ℓ	T			
							Str.	Fld.								
26 to 22 (0.2 to 0.5)	3-4	3	V0.5-3A	FV0.5-3A	UL SP	3.2 (.126)	1.9 (.075)	2.9 (.114)	5.0 (.197)	16.5 (.650)	6.0 (.236)	8.0 (.315)	0.5 (.020)	Yellow	YNT-2622 YA-1,YA-2	1,000
	5-6	3.5	V0.5-3.7A	FV0.5-3.7A	UL SP	3.7 (.146)			6.4 (.252)	19.0 (.748)	7.7 (.303)					
22 to 16 *(0.25 to 1.65)	1-2	2	V1.25-2A	FV1.25-2A		2.2 (.087)	3.2 (.126)	4.0 (.157)	4.6 (.181)	18.8 (.740)	4.3 (.169)	9.0 (.354)	0.8 (.031)	Red	YNT-2216 YA-1 YA-2 YA-4	1,000
	3-4	3	V1.25-B3A	FV1.25-B3A	UL SP	3.2 (.126)			5.8 (.228)	20.0 (.787)	6.3 (.248)					
	5-6	3.5	V1.25-YS3A	FV1.25-YS3A	UL SP	3.7 (.146)			6.4 (.252)	19.6 (.772)	6.3 (.248)					
	5-6	3.5	V1.25-S3A	FV1.25-S3A	UL SP	3.7 (.146)			7.2 (.284)	20.0 (.787)	6.3 (.248)					
	5-6	3.5	V1.25-N3A	FV1.25-N3A	UL SP	3.7 (.146)			6.2 (.244)	20.0 (.787)	6.3 (.248)					
	5-6	3.5	V1.25-P3A	FV1.25-P3A		3.7 (.146)			7.5 (.295)	18.0 (.709)	5.5 (.217)					
	8	4	V1.25-YS4A	FV1.25-YS4A	UL SP	4.3 (.169)			6.4 (.252)	19.6 (.772)	6.3 (.248)					
	8	4	V1.25-S4A	FV1.25-S4A	UL SP	4.3 (.169)			7.2 (.284)	20.0 (.787)	6.3 (.248)					
	8	4	V1.25-4A	FV1.25-4A	UL SP	4.3 (.169)			8.5 (.335)	20.0 (.787)	7.0 (.276)					
	10	5	V1.25-5A	FV1.25-5A	UL SP	5.3 (.209)			9.5 (.374)	20.0 (.787)	7.0 (.276)					
	10	5	V1.25-M5A	FV1.25-M5A		5.3 (.209)			8.5 (.335)	20.0 (.787)	7.0 (.276)					
	10	5	V1.25-S5A	FV1.25-S5A		5.3 (.209)			7.2 (.284)	20.0 (.787)	6.3 (.248)					
	1/4	6	V1.25-6A	FV1.25-6A	UL SP	6.4 (.252)			12.0 (.472)	26.2(1.032)	11.0 (.433)					
16 to 14 (1.04 to 2.63)	5-6	3.5	V2-3A	FV2-3A	UL SP	3.7 (.146)	3.9 (.154)	4.5 (.177)	8.5 (.335)	21.0 (.827)	7.3 (.287)	9.0 (.354)	0.8 (.031)	Blue	YNT-1614 YA-1 YA-2 YA-4	1,000
	3-4	3	V2-M3A	FV2-M3A	UL SP	3.2 (.126)			6.0 (.236)	18.7 (.736)	5.0 (.197)					
	3-4	3	V2-N3A	FV2-N3A	UL SP	3.2 (.126)			5.9 (.232)	20.0 (.787)	6.3 (.248)					
	5-6	3.5	V2-YS3A	FV2-YS3A	UL SP	3.7 (.146)			6.4 (.252)	19.6 (.772)	6.3 (.248)					
	5-6	3.5	V2-S3A	FV2-S3A	UL SP	3.7 (.146)			7.2 (.284)	20.2 (.795)	6.5 (.256)					
	8	4	V2-YS4A	FV2-YS4A	UL SP	4.3 (.169)			6.4 (.252)	19.6 (.772)	6.3 (.248)					
	8	4	V2-YM4A	FV2-YM4A	UL SP	4.3 (.169)			6.8 (.268)	19.6 (.772)	6.3 (.248)					
	8	4	V2-S4A	FV2-S4A	UL SP	4.3 (.169)			7.2 (.284)	20.2 (.795)	6.5 (.256)					
	8	4	V2-4A	FV2-4A	UL SP	4.3 (.169)			8.5 (.335)	21.0 (.827)	7.3 (.287)					
	10	5	V2-5A	FV2-5A	UL SP	5.3 (.209)			9.5 (.374)	21.0 (.827)	7.3 (.287)					
	10	5	V2-M5A	FV2-M5A	UL SP	5.3 (.209)			8.5 (.335)	21.0 (.827)	7.3 (.287)					
	1/4	6	V2-6A	FV2-6A	UL SP	6.4 (.252)			12.0 (.472)	26.2(1.032)	11.0 (.433)					
12 to 10 (2.63 to 6.64)	5-6	3.5	V5.5-S3A	FV5.5-S3A	UL SP	3.7 (.146)	5.4 (.213)	6.8 (.268)	7.2 (.283)	26.2(1.032)	7.5 (.295)	13.5 (.531)	1.0 (.039)	Yellow	YNT-1210S YA-4	500
	5-6	3.5	V5.5-3A	FV5.5-3A	UL SP	3.7 (.146)			9.5 (.374)	26.2(1.032)	7.5 (.295)					
	8	4	V5.5-S4A	FV5.5-S4A	UL SP	4.3 (.169)			8.5 (.335)	26.2(1.032)	7.5 (.295)					
	8	4	V5.5-4A	FV5.5-4A	UL SP	4.3 (.169)			9.5 (.374)	26.2(1.032)	7.5 (.295)					
	10	5	V5.5-5A	FV5.5-5A	UL SP	5.3 (.209)			9.5 (.374)	26.2(1.032)	7.5 (.295)					
	1/4	6	V5.5-6A	FV5.5-6A	UL SP	6.4 (.252)			13.5 (.532)	32.2(1.268)	12.2 (.480)					
	5/16	8	V5.5-8A	FV5.5-8A		8.4 (.331)			13.5 (.532)	32.2(1.268)	12.2 (.480)					

Note: 1) *The crimping will be more secure if the total cross-sectional area of the wire is at least 0.5 mm².Examples: If the cross-sectional area of the wire is 0.3mm², fold the wire in two when crimping the terminal. If the cross-sectional area of the wire is 0.5mm², crimp the terminal onto the wire as it is.2) The part numbers indicated in the above table are for products with a brazed seam. When ordering products with a butted seam, add the prefix "WS" to the part number (ex. V2-4A → **VWS2-4A**).3) To order products with nylon insulation, change the "V" in the part number prefix to "N" (ex. V2-4A → **N2-4A**). Because nylon absorbs moisture, care must be taken concerning storage.

SPADE TONGUE (A type) *With funnel-entry vinyl-insulation*

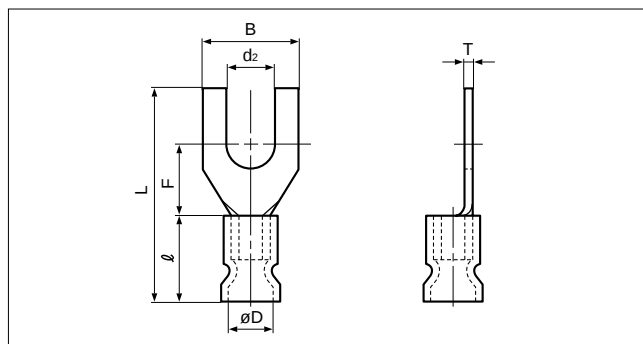

File No.: UL E42024 SP LR20812

Applicable Wire AWG#(mm ²)	Stud size		Part No.	Standard	Dimensions mm (in.)							Color	Tool No.	Qty/box
	American	Metric			d2	ø D	B	L	F	ℓ	T			
22 to 16 *(0.25 to 1.65)	3-4	3	FVX1.25-B3A	UL SP	3.2 (.126)	4.0 (.157)	5.8 (.228)	21.0 (.827)	6.3 (.248)	10.0 (.394)	0.8 (.031)	Red	YNT-2216 YA-1 YA-2 YA-4	1,000
	5-6	3.5	FVX1.25-YS3A	UL SP	3.7 (.146)		6.4 (.252)	20.6 (.811)	6.3 (.248)					
	5-6	3.5	FVX1.25-S3A	UL SP	3.7 (.146)		7.2 (.284)	21.0 (.827)	6.3 (.248)					
	5-6	3.5	FVX1.25-N3A	UL SP	3.7 (.146)		6.2 (.244)	21.0 (.827)	6.3 (.248)					
	5-6	3.5	FVX1.25-P3A	UL SP	3.7 (.146)		7.5 (.295)	19.0 (.748)	5.5 (.217)					
	8	4	FVX1.25-YS4A	UL SP	4.3 (.169)		6.4 (.252)	20.6 (.811)	6.3 (.248)					
	8	4	FVX1.25-S4A	UL SP	4.3 (.169)		7.2 (.284)	21.0 (.827)	6.3 (.248)					
	8	4	FVX1.25-4A	UL SP	4.3 (.169)		8.5 (.335)	21.0 (.827)	7.0 (.276)					
	10	5	FVX1.25-5A	UL SP	5.3 (.209)		9.5 (.374)	21.0 (.827)	7.0 (.276)					
	10	5	FVX1.25-M5A	UL SP	5.3 (.209)		8.5 (.335)	21.0 (.827)	7.0 (.276)					
	10	5	FVX1.25-S5A	UL SP	5.3 (.209)		7.2 (.284)	21.0 (.827)	6.3 (.248)					
	1/4	6	FVX1.25-6A	UL SP	6.4 (.252)		12.0 (.472)	27.2(1.071)	11.0 (.433)					
16 to 14 (1.04 to 2.63)	5-6	3.5	FVX2-3A	UL SP	3.7 (.146)	4.8 (.189)	8.5 (.335)	22.0 (.866)	7.3 (.287)	10.0 (.394)	0.8 (.031)	Blue	YNT-1614 YA-1 YA-2 YA-4	1,000
	3-4	3	FVX2-M3A	UL SP	3.2 (.126)		6.0 (.236)	19.7 (.776)	5.0 (.197)					
	3-4	3	FVX2-N3A	UL SP	3.2 (.126)		5.9 (.232)	21.0 (.827)	6.3 (.248)					
	5-6	3.5	FVX2-YS3A	UL SP	3.7 (.146)		6.4 (.252)	20.6 (.811)	6.3 (.248)					
	5-6	3.5	FVX2-S3A	UL SP	3.7 (.146)		7.2 (.284)	21.2 (.835)	6.5 (.256)					
	8	4	FVX2-YS4A	UL SP	4.3 (.169)		6.4 (.252)	20.6 (.811)	6.3 (.248)					
	8	4	FVX2-YM4A	UL SP	4.3 (.169)		6.8 (.268)	20.6 (.811)	6.3 (.248)					
	8	4	FVX2-S4A	UL SP	4.3 (.169)		7.2 (.284)	21.2 (.835)	6.5 (.256)					
	8	4	FVX2-4A	UL SP	4.3 (.169)		8.5 (.335)	22.0 (.866)	7.3 (.287)					
	10	5	FVX2-5A	UL SP	5.3 (.209)		9.5 (.374)	22.0 (.866)	7.3 (.287)					
	10	5	FVX2-M5A	UL SP	5.3 (.209)		8.5 (.335)	22.0 (.866)	7.3 (.287)					
	1/4	6	FVX2-6A	UL SP	6.4 (.252)		12.0 (.472)	27.2(1.071)	11.0 (.433)					500
12 to 10 (2.63 to 6.64)	5-6	3.5	FVX5.5-S3A	UL SP	3.7 (.146)	7.0 (.276)	7.2 (.284)	26.7(1.051)	7.5 (.295)	14.0 (.551)	1.0 (.039)	Yellow	YNT-1210S YA-4	500
	5-6	3.5	FVX5.5-3A	UL SP	3.7 (.146)		9.5 (.374)	26.7(1.051)	7.5 (.295)					
	8	4	FVX5.5-S4A	UL SP	4.3 (.169)		8.5 (.335)	27.2(1.071)	7.5 (.295)					
	8	4	FVX5.5-4A	UL SP	4.3 (.169)		9.5 (.374)	26.7(1.051)	7.5 (.295)					
	10	5	FVX5.5-5A	UL SP	5.3 (.209)		9.5 (.374)	26.7(1.051)	7.5 (.295)					
	1/4	6	FVX5.5-6A	UL SP	6.4 (.252)		13.5 (.532)	32.7(1.287)	12.2 (.480)					
	5/16	8	FVX5.5-8A	UL SP	8.4 (.331)		13.5 (.532)	32.7(1.287)	12.2 (.480)					250


Note:1) The part numbers indicated in the above table are for products with a brazed seam.

When ordering products with a butted seam, add the prefix "WS" to the part number (ex. FVX2-4A → FVXWS2-4A).

2) *The crimping will be more secure if the total cross-sectional area of the wire is at least 0.5 mm².Examples: If the cross-sectional area of the wire is 0.3mm², fold the wire in two when crimping the terminal. If the cross-sectional area of the wire is 0.5mm², crimp the terminal onto the wire as it is.



SPADE TONGUE (A type) *With funnel-entry vinyl-insulation*

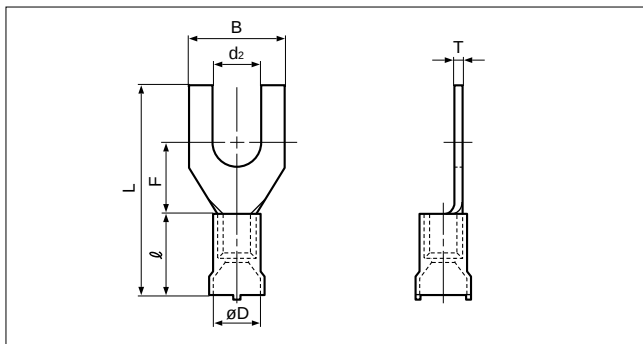

File No.: E42024 LR20812

Applicable Wire AWG#(mm²)	Stud size		Part No.	Standard	Dimensions mm (in.)							Color	Tool No.	Qty/box
	American	Metric			d2	Ø D	B	L	F	ℓ	T			
22 to 16 (0.25 to 1.65)	1-2	2	FVL1.25-2A		2.2 (.087)	4.0 (.157)	4.6 (.181)	19.9 (.783)	4.3 (.169)	10.1 (.398)	0.8 (.031)	Red	YNT-2216 YA-1 YA-2 YA-4	1,000
	3-4	3	FVL1.25-B3A		3.2 (.126)		5.8 (.228)	21.1 (.831)	6.3 (.248)					
	5-6	3.5	FVL1.25-YS3A		3.7 (.146)		6.4 (.252)	20.7 (.815)	6.3 (.248)					
	5-6	3.5	FVL1.25-S3A		3.7 (.146)		7.2 (.284)	21.1 (.831)	6.3 (.248)					
	5-6	3.5	FVL1.25-N3A		3.7 (.146)		6.2 (.244)	21.1 (.831)	6.3 (.248)					
	5-6	3.5	FVL1.25-P3A		3.7 (.146)		7.5 (.295)	19.1 (.752)	5.5 (.217)					
	8	4	FVL1.25-YS4A		4.3 (.169)		6.4 (.252)	20.7 (.815)	6.3 (.248)					
	8	4	FVL1.25-S4A		4.3 (.169)		7.2 (.284)	21.1 (.831)	6.3 (.248)					
	8	4	FVL1.25-4A		4.3 (.169)		8.5 (.335)	21.1 (.831)	7.0 (.276)					
	10	5	FVL1.25-5A		5.3 (.209)		9.5 (.374)	21.1 (.831)	7.0 (.276)					
	10	5	FVL1.25-M5A		5.3 (.209)		8.5 (.335)	21.1 (.831)	7.0 (.276)					
	10	5	FVL1.25-S5A		5.3 (.209)		7.2 (.284)	21.1 (.831)	6.3 (.248)					
	1/4	6	FVL1.25-6A		6.4 (.252)		12.0 (.472)	27.3(1.075)	11.0 (.433)					
16 to 14 (1.04 to 2.63)	5-6	3.5	FVL2-3A		3.7 (.146)	4.5 (.178)	8.5 (.335)	22.1 (.870)	7.3 (.287)	10.1 (.398)	0.8 (.031)	Blue	YNT-1614 YA-1 YA-2 YA-4	1,000
	3-4	3	FVL2-M3A		3.2 (.126)		6.0 (.236)	19.8 (.780)	5.0 (.197)					
	3-4	3	FVL2-N3A		3.2 (.126)		5.9 (.232)	21.1 (.831)	6.3 (.248)					
	5-6	3.5	FVL2-YS3A		3.7 (.146)		6.4 (.252)	20.7 (.815)	6.3 (.248)					
	5-6	3.5	FVL2-S3A		3.7 (.146)		7.2 (.284)	21.3 (.839)	6.5 (.256)					
	8	4	FVL2-YS4A		4.3 (.169)		6.4 (.252)	20.7 (.815)	6.3 (.248)					
	8	4	FVL2-YM4A		4.3 (.169)		6.8 (.268)	20.7 (.815)	6.3 (.248)					
	8	4	FVL2-S4A		4.3 (.169)		7.2 (.284)	21.3 (.839)	6.5 (.256)					
	8	4	FVL2-4A		4.3 (.169)		8.5 (.335)	22.1 (.870)	7.3 (.287)					
	10	5	FVL2-5A		5.3 (.209)		9.5 (.374)	22.1 (.870)	7.3 (.287)					
	10	5	FVL2-M5A		5.3 (.209)		8.5 (.335)	22.1 (.870)	7.3 (.287)					
	1/4	6	FVL2-6A		6.4 (.252)		12.0 (.472)	27.3(1.075)	11.0 (.433)					
12 to 10 (2.63 to 6.64)	5-6	3.5	FVL5.5-S3A		3.7 (.146)	6.8 (.268)	7.2 (.284)	27.2(1.071)	7.5 (.295)	14.5 (.571)	1.0 (.039)	Yellow	YNT-1210S YA-4	500
	5-6	3.5	FVL5.5-3A		3.7 (.146)		9.5 (.374)	27.2(1.071)	7.5 (.295)					
	8	4	FVL5.5-S4A		4.3 (.169)		8.5 (.335)	27.7(1.091)	7.5 (.295)					
	8	4	FVL5.5-4A		4.3 (.169)		9.5 (.374)	27.2(1.071)	7.5 (.295)					
	10	5	FVL5.5-5A		5.3 (.209)		9.5 (.374)	27.2(1.071)	7.5 (.295)					
	1/4	6	FVL5.5-6A		6.4 (.252)		13.5 (.532)	33.2(1.307)	12.2 (.480)					
	5/16	8	FVL5.5-8A		8.4 (.331)		13.5 (.532)	33.2(1.307)	12.2 (.480)					




Note:1) The part numbers indicated in the above table are for products with a brazed seam.

When ordering products with a butted seam, add the prefix "WS" to the part number (ex. FVL2-4A → **FVLWS2-4A**).

2) *The crimping will be more secure if the total cross-sectional area of the wire is at least 0.5 mm².

Examples: If the cross-sectional area of the wire is 0.3mm², fold the wire in two when crimping the terminal. If the cross-sectional area of the wire is 0.5mm², crimp the terminal onto the wire as it is.

SPADE TONGUE (A type) *Vinyl-insulated with copper sleeve*

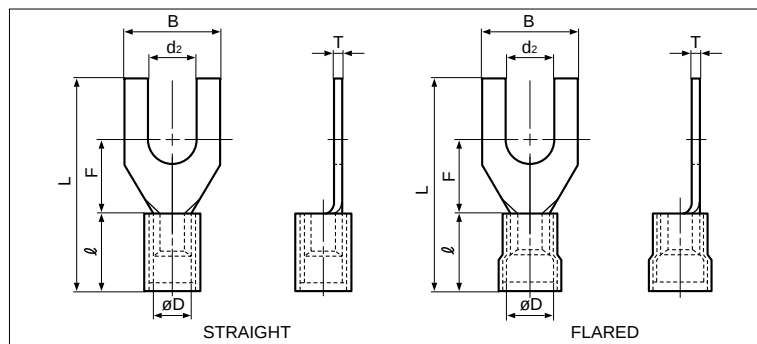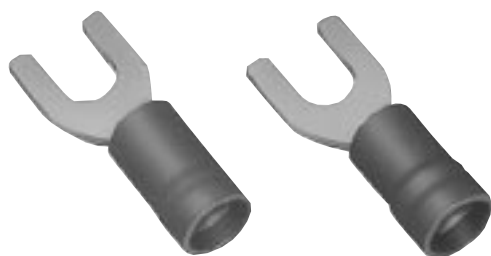

File No.: E42024 LR20812

Applicable Wire AWG#(mm ²)	Stud size		Part No.		Standard	Dimensions mm (in.)								Color	Tool No.	Qty/box
	American	Metric	Straight	Flared		d ₂	ø D		B	L	F	ℓ	T			
							Str.	Fld.								
26 to 22 (0.2 to 0.5)	3-4	3	VD0.5-3A	FVD0.5-3A		3.2 (.126)	2.2 (.087)	2.5 (.098)	5.0 (.197)	16.5 (.650)	6.0 (.236)	8.0 (.315)	0.5 (.020)	Yellow	YNT-2622 YA-1,YA-2	1,000
	5-6	3.5	VD0.5-3.7A	FVD0.5-3.7A		3.7 (.146)			6.4 (.252)	19.0 (.748)	7.7 (.303)					
22 to 16 (0.25 to 1.65)	1-2	2	VD1.25-2A	FVD1.25-2A		2.2 (.087)	3.5 (.138)	4.0 (.157)	4.6 (.181)	19.4 (.764)	4.3 (.169)	9.6 (.378)	0.8 (.031)	Red	YNT-2216 YA-1 YA-2 YA-4	1,000
	3-4	3	VD1.25-B3A	FVD1.25-B3A		3.2 (.126)			5.8 (.228)	20.6 (.811)	6.3 (.248)					
	5-6	3.5	VD1.25-YS3A	FVD1.25-YS3A		3.7 (.146)			6.4 (.252)	20.2 (.795)	6.3 (.248)					
	5-6	3.5	VD1.25-S3A	FVD1.25-S3A		3.7 (.146)			7.2 (.284)	20.6 (.811)	6.3 (.248)					
	5-6	3.5	VD1.25-N3A	FVD1.25-N3A		3.7 (.146)			6.2 (.244)	20.6 (.811)	6.3 (.248)					
	5-6	3.5	VD1.25-P3A	FVD1.25-P3A		3.7 (.146)			7.5 (.295)	18.6 (.732)	5.5 (.217)					
	8	4	VD1.25-YS4A	FVD1.25-YS4A		4.3 (.169)			6.4 (.252)	20.2 (.795)	6.3 (.248)					
	8	4	VD1.25-S4A	FVD1.25-S4A		4.3 (.169)			7.2 (.284)	20.6 (.811)	6.3 (.248)					
	8	4	VD1.25-4A	FVD1.25-4A		4.3 (.169)			8.5 (.335)	20.6 (.811)	7.0 (.276)					
	10	5	VD1.25-5A	FVD1.25-5A		5.3 (.209)			9.5 (.374)	20.6 (.811)	7.0 (.276)					
	10	5	VD1.25-M5A	FVD1.25-M5A		5.3 (.209)			8.5 (.335)	20.6 (.811)	7.0 (.276)					
	10	5	VD1.25-S5A	FVD1.25-S5A		5.3 (.209)			7.2 (.284)	20.6 (.811)	6.3 (.248)					
	1/4	6	VD1.25-6A	FVD1.25-6A		6.4 (.252)			12.0 (.472)	26.8(1.055)	11.0 (.433)					
16 to 14 (1.04 to 2.63)	5-6	3.5	VD2-3A	FVD2-3A		3.7 (.146)	4.1 (.161)	4.7 (.185)	8.5 (.335)	21.6 (.850)	7.3 (.287)	9.6 (.378)	0.8 (.031)	Blue	YNT-1614 YA-1 YA-2 YA-4	1,000
	3-4	3	VD2-M3A	FVD2-M3A		3.2 (.126)			6.0 (.236)	19.3 (.760)	5.0 (.197)					
	3-4	3	VD2-N3A	FVD2-N3A		3.2 (.126)			5.9 (.232)	20.6 (.811)	6.3 (.248)					
	5-6	3.5	VD2-YS3A	FVD2-YS3A		3.7 (.146)			6.4 (.252)	20.2 (.795)	6.3 (.248)					
	5-6	3.5	VD2-S3A	FVD2-S3A		3.7 (.146)			7.2 (.284)	20.8 (.819)	6.5 (.256)					
	8	4	VD2-YS4A	FVD2-YS4A		4.3 (.169)			6.4 (.252)	20.2 (.795)	6.3 (.248)					
	8	4	VD2-YM4A	FVD2-YM4A		4.3 (.169)			6.8 (.268)	20.2 (.795)	6.3 (.248)					
	8	4	VD2-S4A	FVD2-S4A		4.3 (.169)			7.2 (.284)	20.8 (.819)	6.5 (.256)					
	8	4	VD2-4A	FVD2-4A		4.3 (.169)			8.5 (.335)	21.6 (.850)	7.3 (.287)					
	10	5	VD2-5A	FVD2-5A		5.3 (.209)			9.5 (.374)	21.6 (.850)	7.3 (.287)					
	10	5	VD2-M5A	FVD2-M5A		5.3 (.209)			8.5 (.335)	21.6 (.850)	7.3 (.287)					
	1/4	6	VD2-6A	FVD2-6A		6.4 (.252)			12.0 (.472)	26.8(1.055)	11.0 (.433)					
12 to 10 (2.63 to 6.64)	5-6	3.5	VD5.5-S3A	FVD5.5-S3A		3.7 (.146)	5.7 (.224)	6.5 (.256)	7.2 (.283)	26.7(1.051)	7.5 (.295)	14.0 (.551)	1.0 (.039)	Yellow	YNT-1210S YA-4	500
	5-6	3.5	VD5.5-3A	FVD5.5-3A		3.7 (.146)			9.5 (.374)	26.7(1.051)	7.5 (.295)					
	8	4	VD5.5-S4A	FVD5.5-S4A		4.3 (.169)			8.5 (.335)	26.7(1.051)	7.5 (.295)					
	8	4	VD5.5-4A	FVD5.5-4A		4.3 (.169)			9.5 (.374)	26.7(1.051)	7.5 (.295)					
	10	5	VD5.5-5A	FVD5.5-5A		5.3 (.209)			9.5 (.374)	26.7(1.051)	7.5 (.295)					
	1/4	6	VD5.5-6A	FVD5.5-6A		6.4 (.252)			13.5 (.532)	32.7(1.287)	12.2 (.480)					
	5/16	8	VD5.5-8A	FVD5.5-8A		8.4 (.331)			13.5 (.532)	32.7(1.287)	12.2 (.480)					

Note:1) The part numbers indicated in the above table are for products with a brazed seam.

When ordering products with a butted seam, add the prefix "WS" to the part number (ex. VD2-4A →VDWS2-4A).

2) To order products with nylon insulation, change the "V" in the part number prefix to "N" (ex. VD2-4A →ND2-4A). Because nylon absorbs moisture, care must be taken concerning storage.