

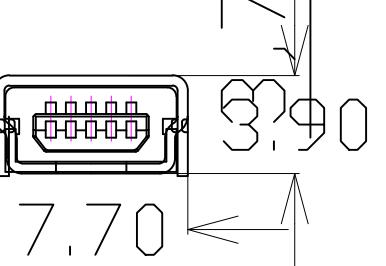
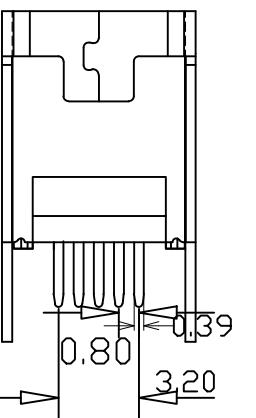
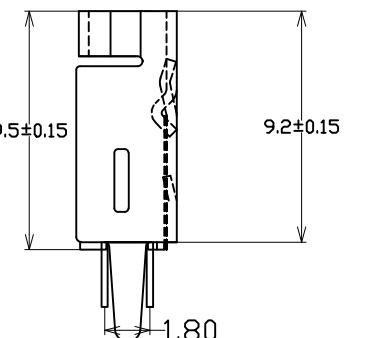


A	B	C	D	E	F	G	H
REV.	ECN.NO	DATE	DRAW	APPROVE			

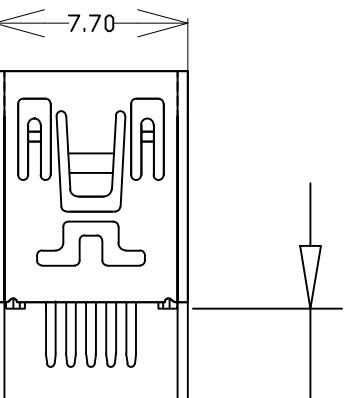

Recommended PCB Layout

特性: Specifications:
 电器: Electrical:
 接触阻抗: Contact Resistance
 30 milliohms Max
 耐电压: Dielectric Withstanding Voltage:
 500V AC Sea Level
 绝缘阻抗: Insulation Resistance:
 100 MEGA ohms MIN
 材料: Material:
 塑胶Housing:Hing Temperature Thermoplastics.
 LCP 高温塑胶
 端子: Contact: Copper Alloy 铜合金
 铜壳Shell:Copper Alloy 铜合金
 电镀Finish:
 端子Contact:Piated Gold In Mating Area:
 Tin On Slider Tails
 接触点镀金。脚镀锡
 铜壳: Shell:
 Nickel/Plating 镀镍

TOLERANCE UNLESS OTHERWISE SPECIFIED ± 0.30 ± 0.20 ± 0.10 $\pm 1^\circ$		东莞市合智电子有限公司					
DRAWING		TITLE			MINI USB5P180度直插直脚		
CHECKED		P/N			USB-120A		REV. A/0
APPROVED		DATE			09/11/16	UNIT	MM
		SCALE	4:1	PROJECTION			