




REV.	ECN NO OR DESCRIPTION	REVISED	DATE

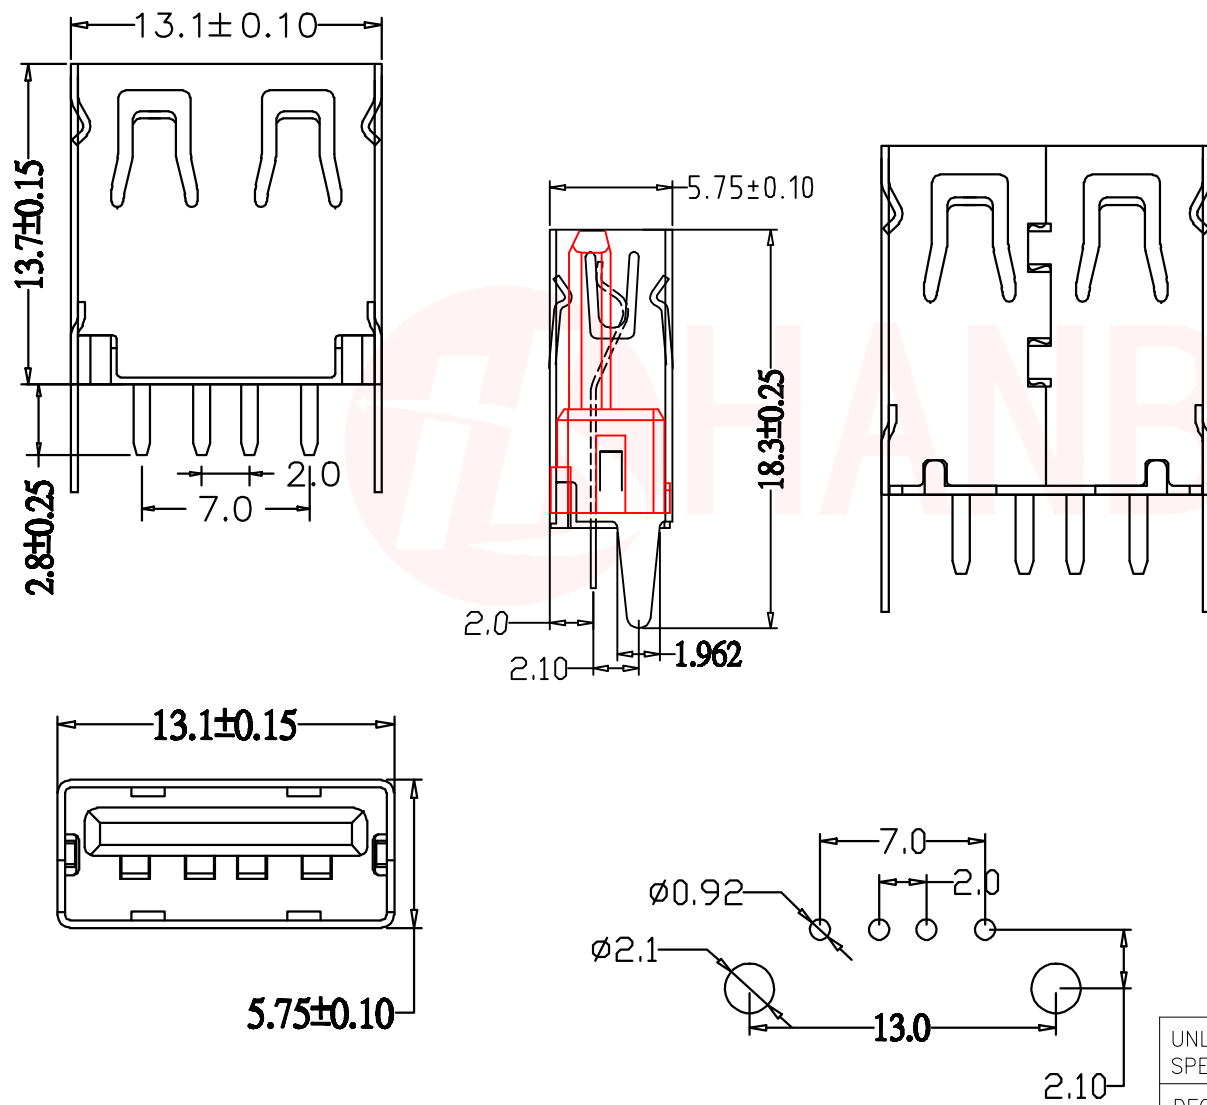

**规格说明: Specifications:**

**电气特性: Electrical:**

- 额定电流: Current Rating**  
1.5A/contact terminal
- 额定电压: Voltage Rating**  
30V DC
- 接触电阻: Contact Resistance**  
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:**  
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:**  
1000MEGA ohms MIN

**物理性能: Mechanical:**

- 插拔力: Connector Mate and Unmate Force**  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)

**原材料: Material:**

- 塑胶: Housing:**  
Hing Temperature Tnermaplastics,
- 端子: Contact: Copper Alloy C2680**
- 外壳: Shell: Copper Alloy C2680/SPCC**

**电镀: Finish:**

- 端子: Contact: Plated Gold in Mating Area  
Tin On Solder Talls**

端子四周镀50U”(MIN)锡,镀金区域1U”

- 外壳: Shell:**  
铜壳四周镀80U” MIN 镍

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE	USB 2.0 AF 直插式13.7 直边 铁壳		
X : ±0.30	X : ±2°	DWN	xiong	PART NO. USB-U255ZH137-BWS	
X.X : ±0.20	X.X : ±1°	CHKD	lee	SCALE: 1:1	UNIT: mm
X.XX : ±0.10		APVD	wang	SIZE: A4	SHEET: 1OF 1
CUSTOMER COPY					
		REV: A4			