

compact Pin Busbar, 10mm² connection: 3p/N (FI N-right) 1x RCCB 4-pole + 8x compact device 1 MW touch protected N-right 12 MW cuttable



Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	10 mm ² , 3p+N, 12MW, RCCB 3p+N + 8x compact, can be cut
General technical data	
phase number	3
cross-section	10 mm ²
operating voltage rated value maximum	230 V
Main circuit	
operational current rated value	63 A
Suitability	
suitability for interaction	
• devices with auxiliary switch	No
• devices with N conductor	Yes
Product details	
product feature insulated	Yes
Number	
number of devices suitable for fitting	9
Connections	
type of electrical connection	Pin
Mechanical Design	
height	13.7 mm
width	42.4 mm
length	215.8 mm
net weight	124 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)

other	Environment
-------	-------------

[Miscellaneous](#)

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3783-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3783-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3783-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

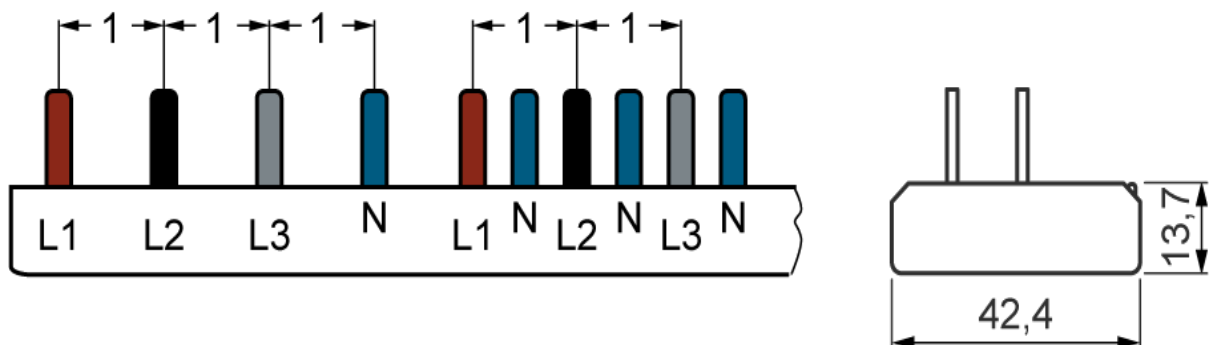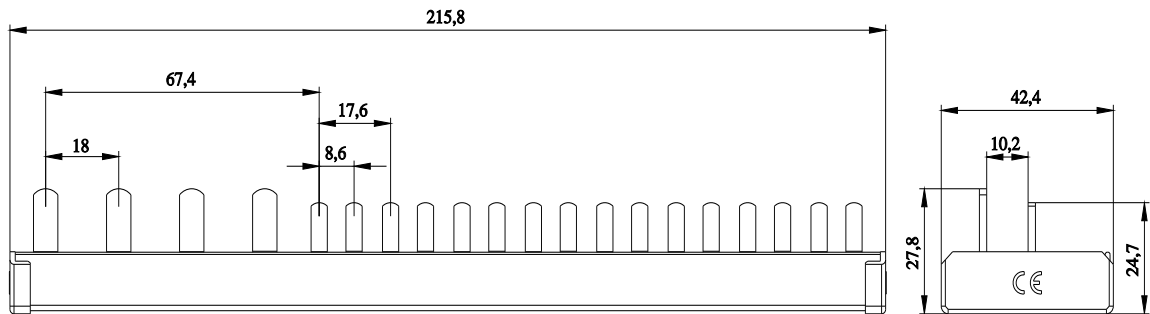

last modified:

7/9/2021

