

Mounting material - PACT-FAST-MNT-W13-L65 - 2276625

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The transformer quick-action mechanism enables the lightning-fast mounting of PACT current transformers on the power rail. The installation can be completed easily by hand without the use of tools. Fixing pins: 65 mm, holding latches: 13 mm

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 658348
GTIN	4046356658348
Weight per Piece (excluding packing)	60.000 g
Custom tariff number	39269097
Country of origin	China

Technical data

Note

Type of note	Order information:
Note	The 16 mm wide converter attachment can also be used for larger current transformers if the length of the fixing pins is sufficient.

Dimensions

Width	13 mm
Depth	65 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 120 °C
---------------------------------	-------------------

Connection data

Torque	0.4 Nm
--------	--------

Mounting material - PACT-FAST-MNT-W13-L65 - 2276625


Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

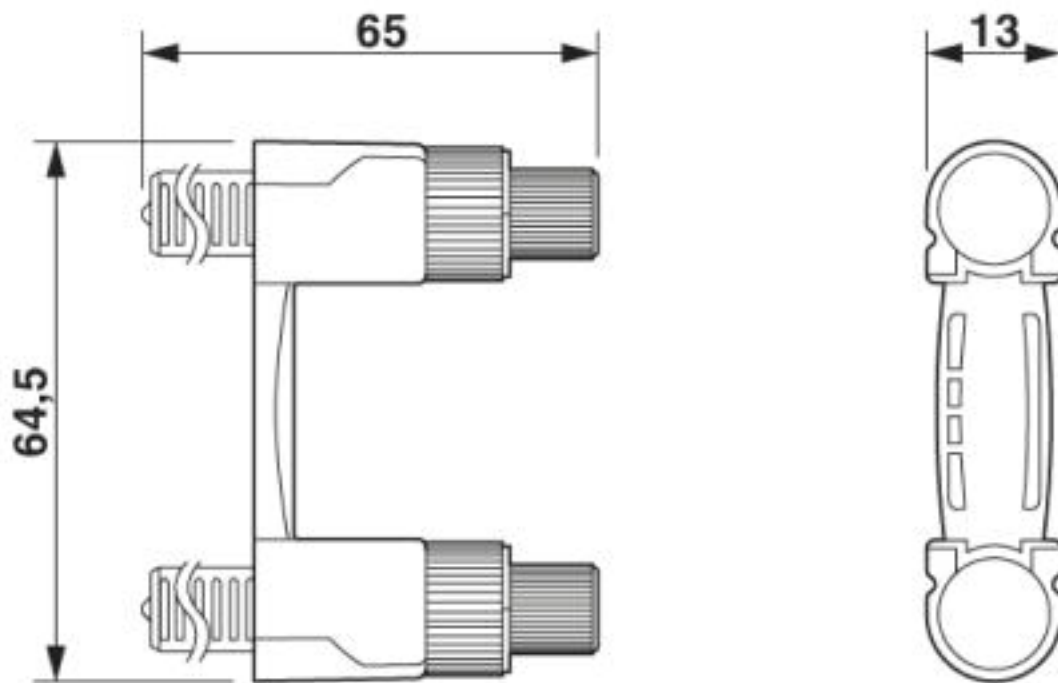

Classifications

eCl@ss

eCl@ss 10.0.1	27219290
eCl@ss 4.0	27210900
eCl@ss 4.1	27210900
eCl@ss 5.0	27210900
eCl@ss 5.1	27210900
eCl@ss 6.0	27149200
eCl@ss 7.0	27149223
eCl@ss 8.0	27219290
eCl@ss 9.0	27219290

Mounting material - PACT-FAST-MNT-W13-L65 - 2276625

Classifications

ETIM

ETIM 4.0	EC002048
ETIM 5.0	EC002498
ETIM 6.0	EC002498
ETIM 7.0	EC002498

UNSPSC

UNSPSC 6.01	30211501
UNSPSC 7.0901	39121019
UNSPSC 11	39121006
UNSPSC 12.01	39121006
UNSPSC 13.2	39121006