

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

5XE17

5XE17

PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE

6

ISSUE

6

REVISIONS

A OBS DWG

CO-34416

D J D

20 DEC 74

B RE-INS

PR-4925

K P K

1 APR 75

C C052067

C J H

21 SEP 82

D CO

57328-A

W J M

15 APR 85

E C094282

D L M

3 MAR 99

FORMTEK

FO-50378-A

DRAWN

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

3 APR 70

REPLACES

PR-4925


RELEASE NO.

CHECK

CHECK

CHECK

CHECK

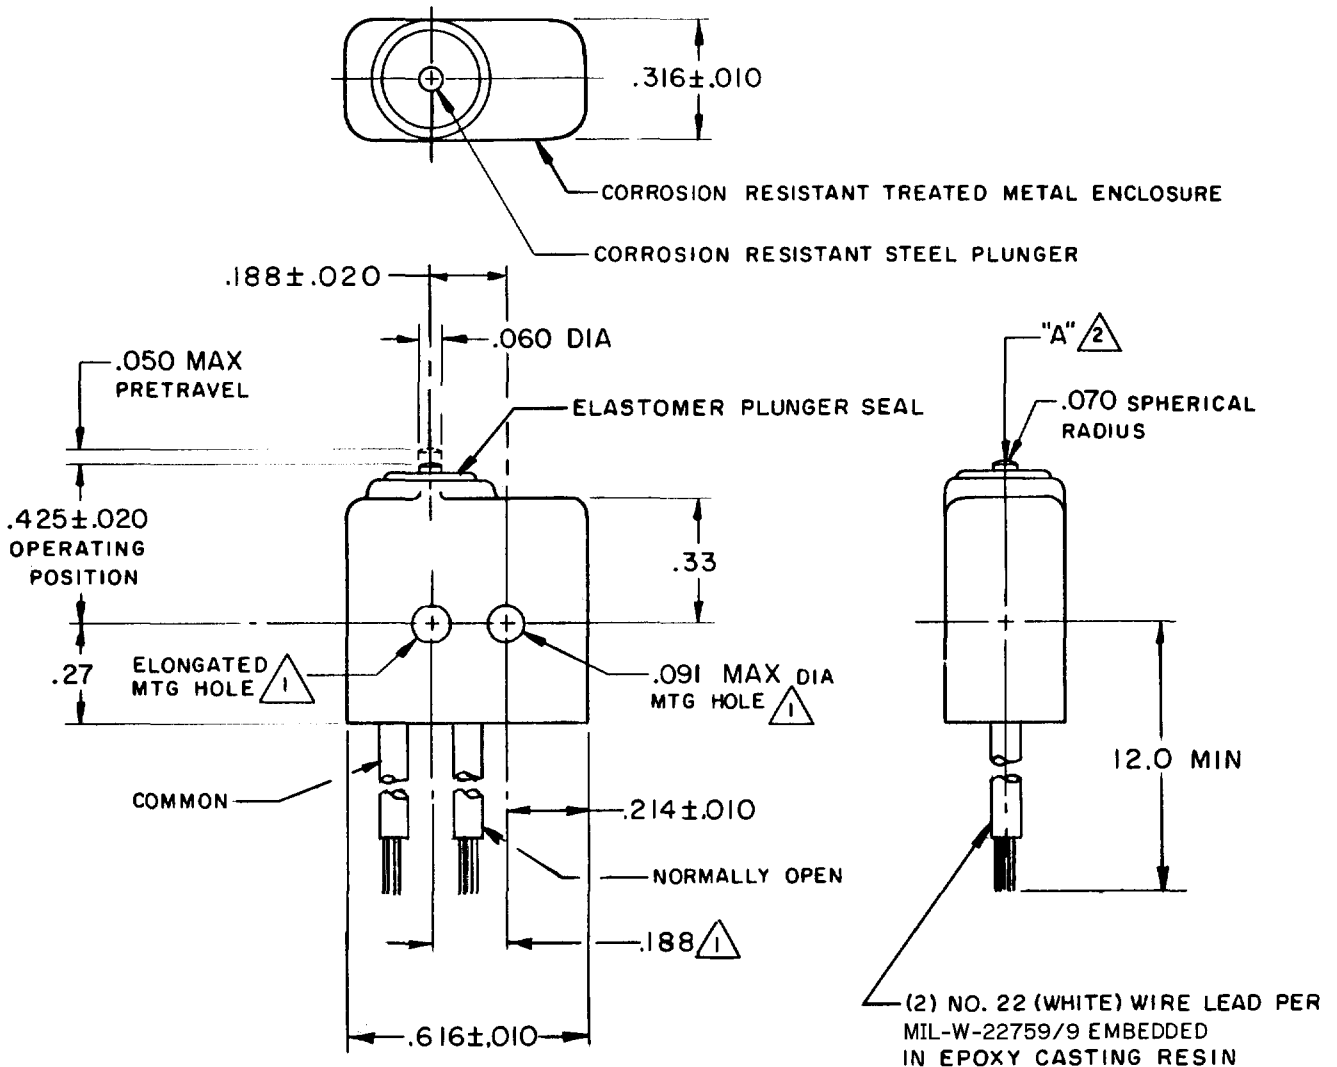

NOTE -

- 1 MOUNTING HOLES WILL ACCEPT $.087$ MAX DIA PINS OR SCREWS ON $.188 \pm .002$ CENTERS
- 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- 3 WEIGHT OF SWITCH ONLY IS $.16$ OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS $.55$ OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — — 5-17 OZ

RELEASE FORCE — — — — — 4 OZ MIN

RELEASE TRAVEL — — — — — $.004$ MIN

DIFFERENTIAL TRAVEL — — — — — $.005$ MAX

OVERTRAVEL — — — — — $.004$ MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

28 VOLTS DC RATING

INDUCTIVE — — — — — SEA LEVEL — — — — — 4 AMP

50,000 FT — — — — — 2.5 AMP

RESISTIVE — — — — — SEA LEVEL — — — — — 7 AMP

50,000 FT — — — — — 7 AMP

MAXIMUM INRUSH — — — — — 24 AMP

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm$

WEIGHT

3