
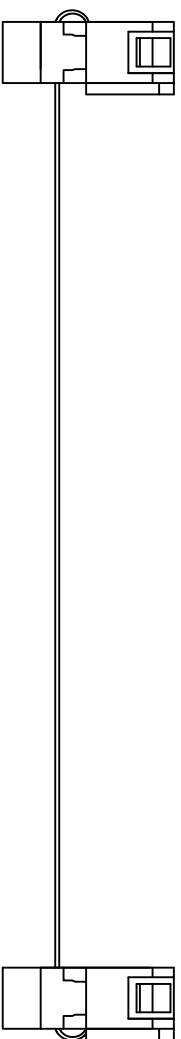
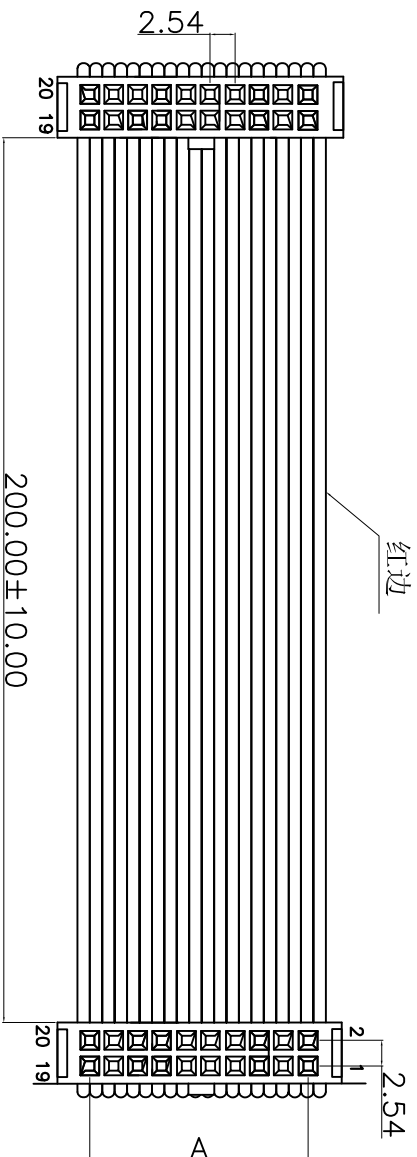


PIN ASSIGNMENT:

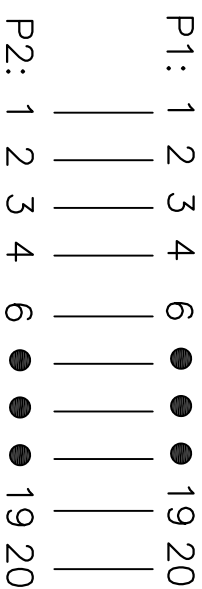

序号	名称	规格说明	数量
1	端子	IDC-XXP 二件式 (2.54mm)	1
2	线材	2651/28#1.27间距灰排	1
3	卡扣	反扣-XXP (2.54mm)	1

MATERIAL (IDC)  
 INSULATOR:PBT (UL 94V-0)  
 Contact: Copper Alloy.  
 Contact Plated:Gold or Tin over  
 Nickel Plated.

SPECIFICATIONS

TEMPERATURE RANGE: -20° C TO +105° C

CONTACT RESISTANCE: 3Ω MAX

INSULATION RESISTANCE: 5MΩ MIN.

WITHSTANDING VOLTAGE: 300V 10S

Pin	A
6	2*3
8	2*4
10	2*5
12	2*6
14	2*7
16	2*8
18	2*9
20	2*10

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	G.M.Chen	2015/3/30	ELECTRONICS CO.,LTD	
CHECKED			LEADWIRE	
APPROVALS			PART NO.	IDC-265126-200-XXP
TOLERANCES ARE		30 <sup>+0.15</sup> <sub>-0.10</sub>	±0.30	ANGLE
		10 <sup>+0.10</sup> <sub>-0.05</sub>	±0.20	UNIT: mm
		5 <sup>+0.10</sup> <sub>-0.05</sub>	±0.15	SCALE: 1:1
			±2°	SHEET 1 OF 1
			DRAWING NO.	PROJ.

