

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 5A
2. Withstanding voltage : AC1250V/1Min.
3. Wire range : 30~20AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

2. Wire range : 0.2~0.5mm²

NOTES2:







1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 2.54mm, Poles : N=04~48P
3. Stripping length : 7~8mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm		-	/	D
	Over	Under			
6 TO 10	10	TO	30	60	100
10 TO 24	24	TO	30	60	100
			60	100	150
			±0.15	±0.20	±0.30
			±0.30	±0.50	±0.70
			±1.00	±1.30	±2*

6. RoHS Compliance

Ordering Information

JL15EDGKDHG-254 XX B 0 1

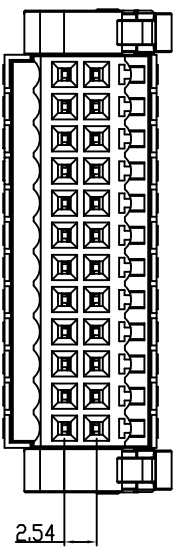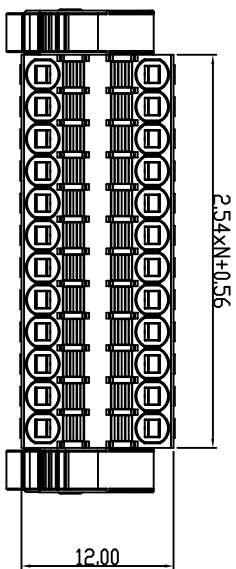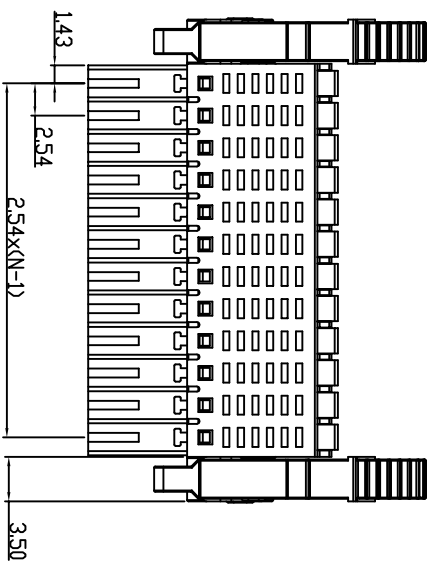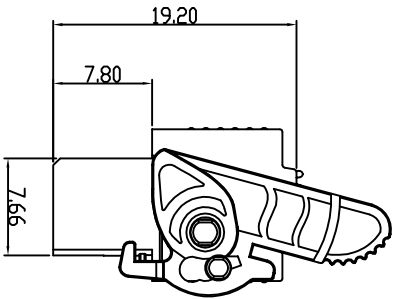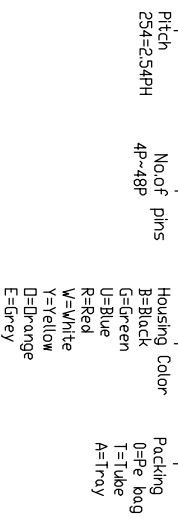

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.12.15

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	TITLE:
	CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLIANG GAO		SIZE	A4	JL15EDGKDHG-254XXB01	JL15EDGKDHG-2.54-2XN插拔式母座黑色/带锁钩
			SHEET	1/1		
			PRD.			

JILIN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD