


| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |

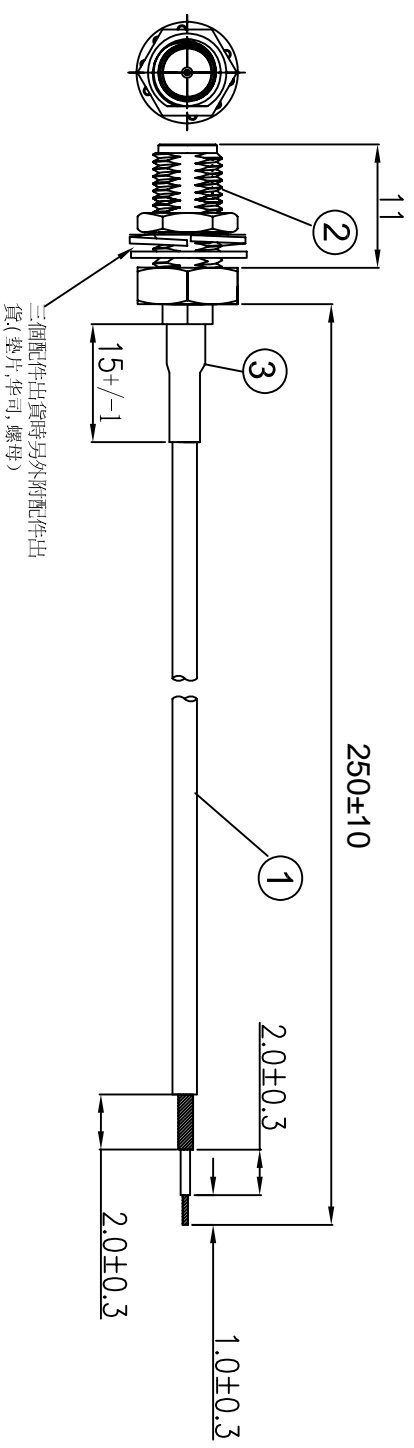

三個配件出貨時另外附配件出貨(墊片,華司,螺母)

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
 - ALL COMPONENTS ARE ROHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-----------------------|------|
| ① | 同轴线 | RF0.81黑色线, OD: 0.81mm | AS |
| ② | 接头 | SMA母头母针, 分体, 11牙, 镀金 | 1 |
| ③ | 套管 | 黑色热缩套管, OD:2.0MM | AS |

深圳市金航标电子有限公司 www.kinghelm.com.cn

型号: KH-122-081SMA-250 0755-83044319

| | | | | | |
|----------------------------------|--|---|------------|-------------------------|--|
| ALL DIMENSION ARE IN MM | | DRAWN | DATE | SMA / F TO OPEN L=250MM | |
| | | Jamy | 2020-06-15 | | |
| COMPUTER GENERATED IN SOLIDWORKS | | ENG. | | | |
| | | MFG. | | | |
| DO NOT SCALE THIS DRAWING | | Q.A. | | | |
| PROJECTION | | GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150 | | | |
| CUSTOMER P/N: | | SIZE | Number | REV | |
| | | B | | A | |
| | | SCALE: Free | TYPE | SHEET 1 OF 1 | |