FIBOX
Enclosing innovations

ARCA ARK1086CHSSL

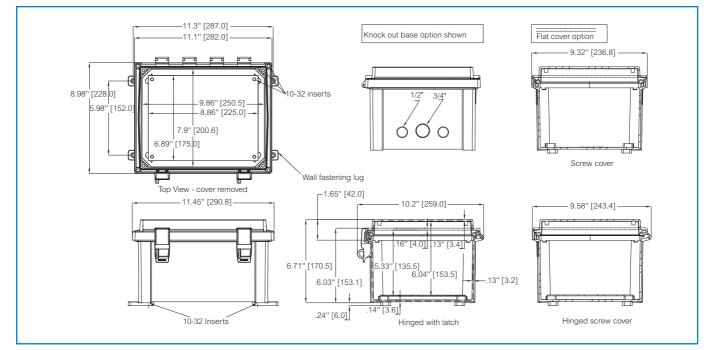|			
Order symbol:	ARK1086CHSSL	**EAN**:	6418074096623
Product nbr:	8561486	**El. number**:	
Description:	PC Enclosure	Finland:	
Remarks:	Hinged opaque cover w/S.S. Lockable latch. Base includes 1/2 and 3/4 inch knock-outs		

Including: Hinged cover. Base with 10-32 brass inserts, latched cover with formed in place PUR gasket, stainless hinge pin. Base with 1/2 and 3/4 inch knock-outs. Quick release latches. Enclosure mounting foot kit. Accessory 10-32 screws for panel mounting.

Dimensions:	Length	Width	Height
mm:	254	203	152
inch:	10.0	8.0	6.0

Materials:	
Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover screws material:	Stainless steel
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

Temperatures:	
Temperature °C (short term):	-40 … 140 °C
Temperature °C (continuous):	-40 … 80 °C
Temperature °F (short term):	-40 … 284 °F
Temperature °F (continuous):	-40 … 175 °F

Accessories:	
ABP108	Painted Steel Back Panel

Accessories:	
ALBP108	Aluminum Back Panel
ADFP108	Dead Front Panel w/ screws
ASP108	Aluminum Swing Panel
ASPK108	Swing Panel Kit incl. Panel
ASPHK10	Swing Panel Kit w/o Panel
AMFL8	8" Mounting Flange Set

Rating:
Ingress Protection (EN 60529): IP66/IP67
Impact Resistance (EN 62262): IK07/IK08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
UV resistance: UL 508
Flammability Rating: UL 508
Glow Wire Test (IEC 695-2-1) °C: 960
NEMA Class: NEMA 4, 4X, 6, 6P, 12, 13