
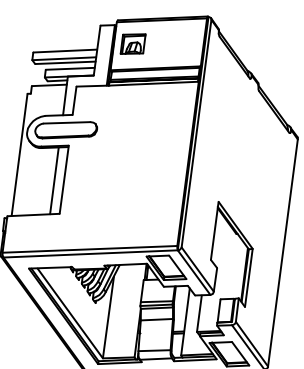
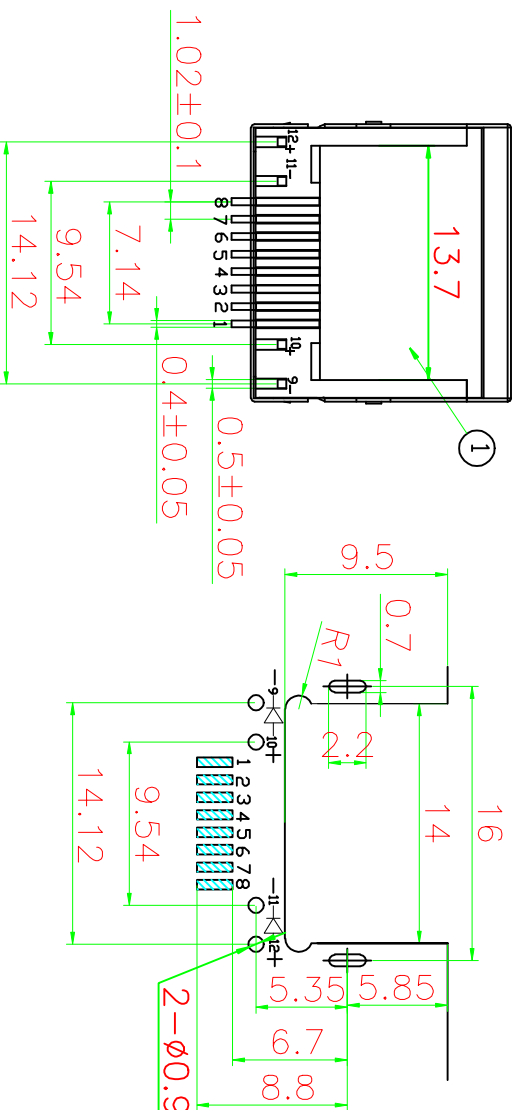
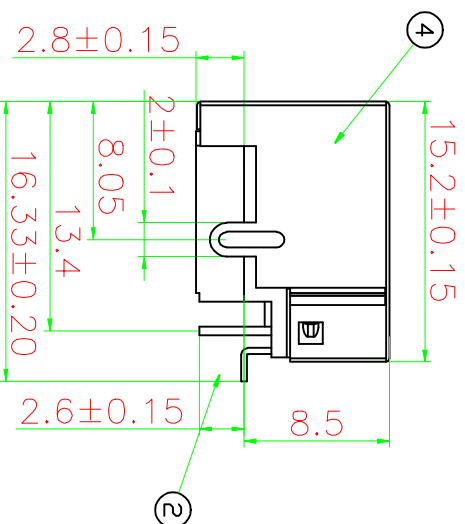


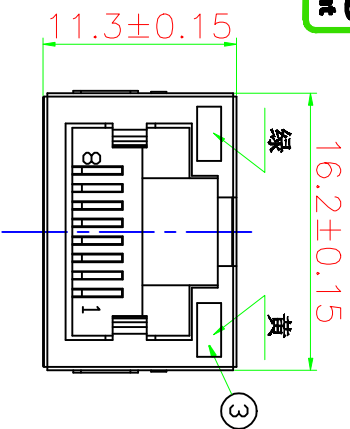

General Specification
Current Rating: 1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20°C~+70°C
Industrial Temperature: -40°C~+85°C
Humidity: 20~70%
Contact Resistance: $\leq 30m\Omega$
Insulation Resistance: $\geq 500M\Omega$
Dielectric Strength: 500V AC/(50HZ)/Min
Mating And Unmating Force: 3~20N
Durability: 750 Cycles Min

Material Specification
Housing: Thermo plastic, UL94V-0.
Contact: Alloy Copper
Shield: Alloy Copper
Please refer to the customer drawing when customer has specified

PCB LAYOUT(TOP VIEW)
RECOMMENDED

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

一般公差		品名		料号		型号		单位		比例		纸张	
30~	±0.20	RJ45		RJ45		RJ45		mm		1:1		A4	
10~30	±0.20	SP321C28-8GY020011B26 (WR01816)		SP321C28-8GY020011B26 (WR01816)		SP321C28-8GY020011B26 (WR01816)		mm		1:1		A4	
~10	±0.15	RJ45		RJ45		RJ45		mm		1:1		A4	
角度:	±2°	RJ45		RJ45		RJ45		mm		1:1		A4	
页面:	1 of 1	版本		版本		版本		mm		1:1		A4	

网络插座外形图										温州瑞川电子有限公司 WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.									
图： 吴鹏飞			日期： 20230721			一般公差				品名： RCH-SP32-7C (带灯无弹) 浙2.8									
审核： 陈旭			日期：			30~ ±0.25				料号： SP327C28-8GY02001LB26 (WRO1816)									
核准： 朱生			日期：			10~30 ±0.20				型号： RJ45									
						~10 ±0.15				图号：									
						角度： ±2°				单位：mm									
						页面： 1 of 1				比例：1:1									
						版本：				纸张：A4									
										