

**RoHS Compliant  
Pb - Lead Free**

Ltr	Revisions	Date	Appr

**Electrical Specifications:**

<b>Frequency Range</b>		<b>12.000 to 52.000</b>	<b>MHz</b>
<b>Mode of Oscillation</b>	<b>Fundamental</b>	<b>12.000 to 52.000</b>	<b>MHZ</b>
<b>Frequency Tolerance at 25°C</b>	<b>Standard</b>	<b>±30</b>	<b>PPM Max (Note 1)</b>
	<b>Optional</b>	<b>±25</b>	
		<b>±20</b>	
		<b>±15</b>	
		<b>±10</b>	
<b>Frequency Stability over Temperature Range</b>	<b>Standard</b>	<b>±50</b>	<b>PPM Max (Note 1)</b>
	<b>Optional</b>	<b>±30</b>	
		<b>±25</b>	
		<b>±20</b>	
		<b>±15</b>	
<b>Operating Temperature Range</b>	<b>Standard</b>	<b>-10 to +70</b>	<b>° C</b>
	<b>Extended</b>	<b>-40 to +85</b>	
<b>Storage Temperature Range</b>		<b>-55 to +125</b>	
<b>Aging</b>		<b>±3</b>	<b>PPM Max/Year</b>
<b>Load Capacitance</b>		<b>7 to 32 and Series Resonance</b>	<b>pF</b>
<b>Shunt Capacitance</b>		<b>5.0</b>	
<b>Equivalent Series Resistance (ESR)</b>		<b>See ESR Table</b>	<b>Ohm</b>
<b>Drive Level</b>		<b>100</b>	<b>uW Max</b>
<b>Insulation Resistance</b>		<b>500 at 100 Vdc ± 15 Vdc</b>	<b>M Ohm</b>

**Frequency Range and ESR Values:**

Frequency Range in MHz	ESR Ohm Max	Mode of Operation
<b>12.000 to 29.900</b>	<b>100</b>	<b>Fundamental</b>
<b>30.000 to 52.000</b>	<b>50</b>	<b>Fundamental</b>



11-3 Chien-Kuo Rd T.E.P.Z. 4027 Taiwan, ROC

All dimensions are millimeters.

CAD: TCR

Review: EG

Appr: JL


Page: 1/4 Date: June 10, 2006

Specification Title:

**Microprocessor Crystal Unit  
Low Profile  
2.5 x 3.2 millimeter Surface Mount  
General Product Specification**


Part Number: **C3E Series**

**Mechanical Outline:**

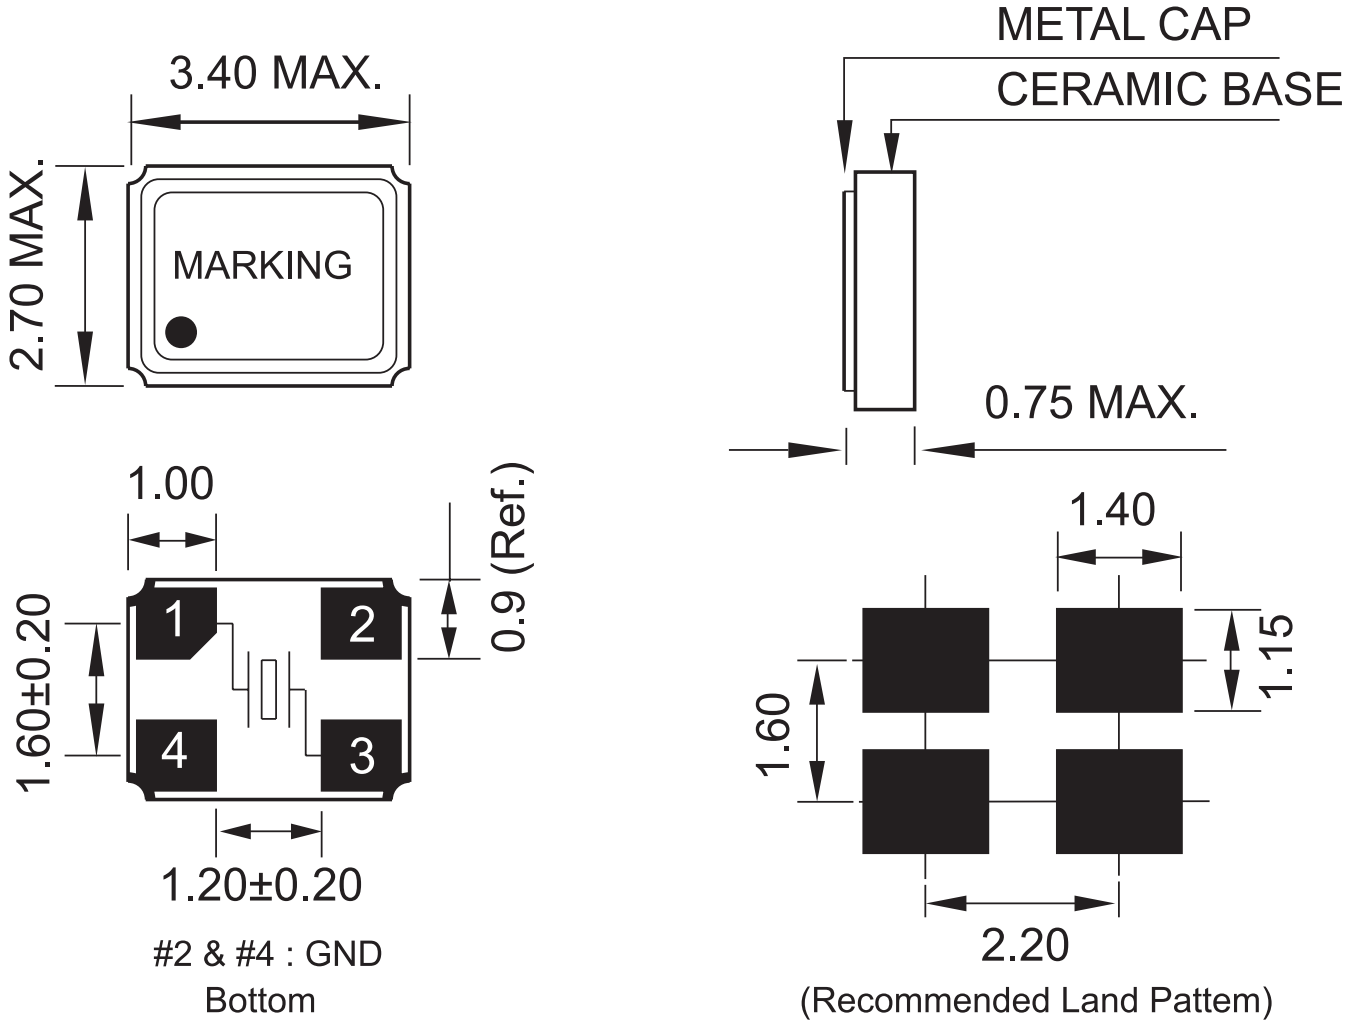


**Package is Seam Sealed Ceramic-Metal.  
Dimensions are millimeters.**

**Carrier Tape Dimensions:**

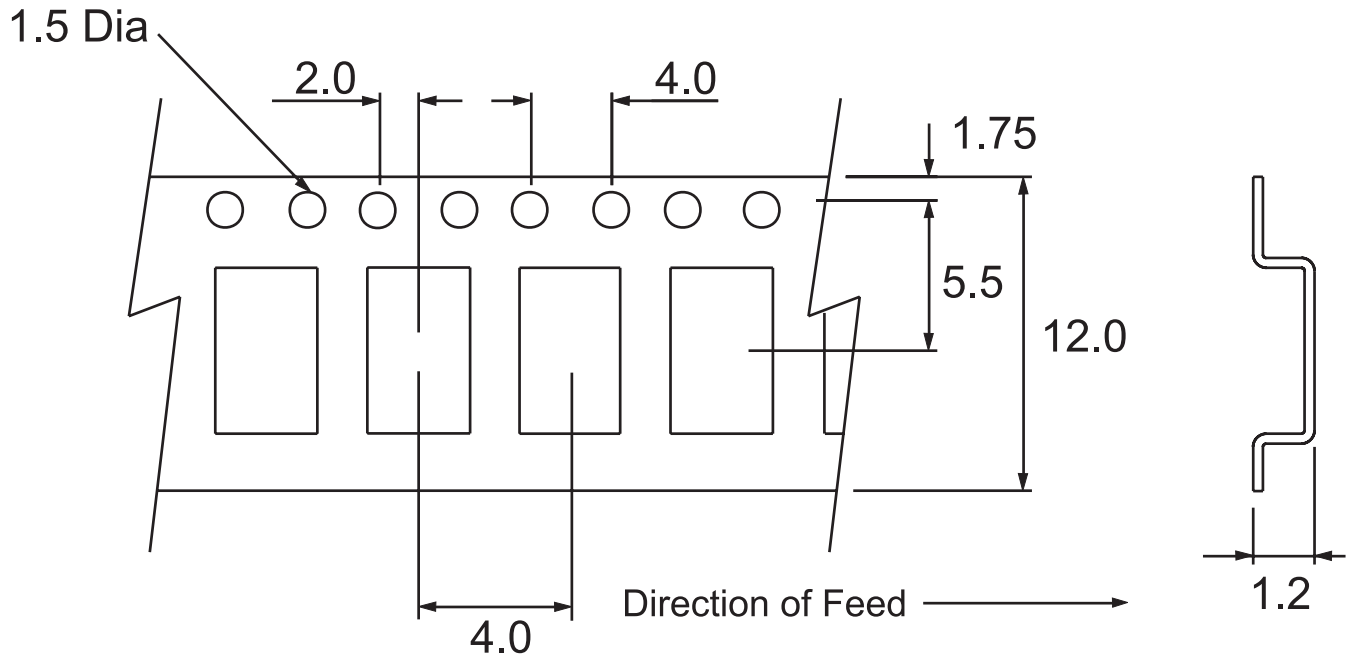

Dimensions are millimeters.

**Solder Reflow Characteristics:**

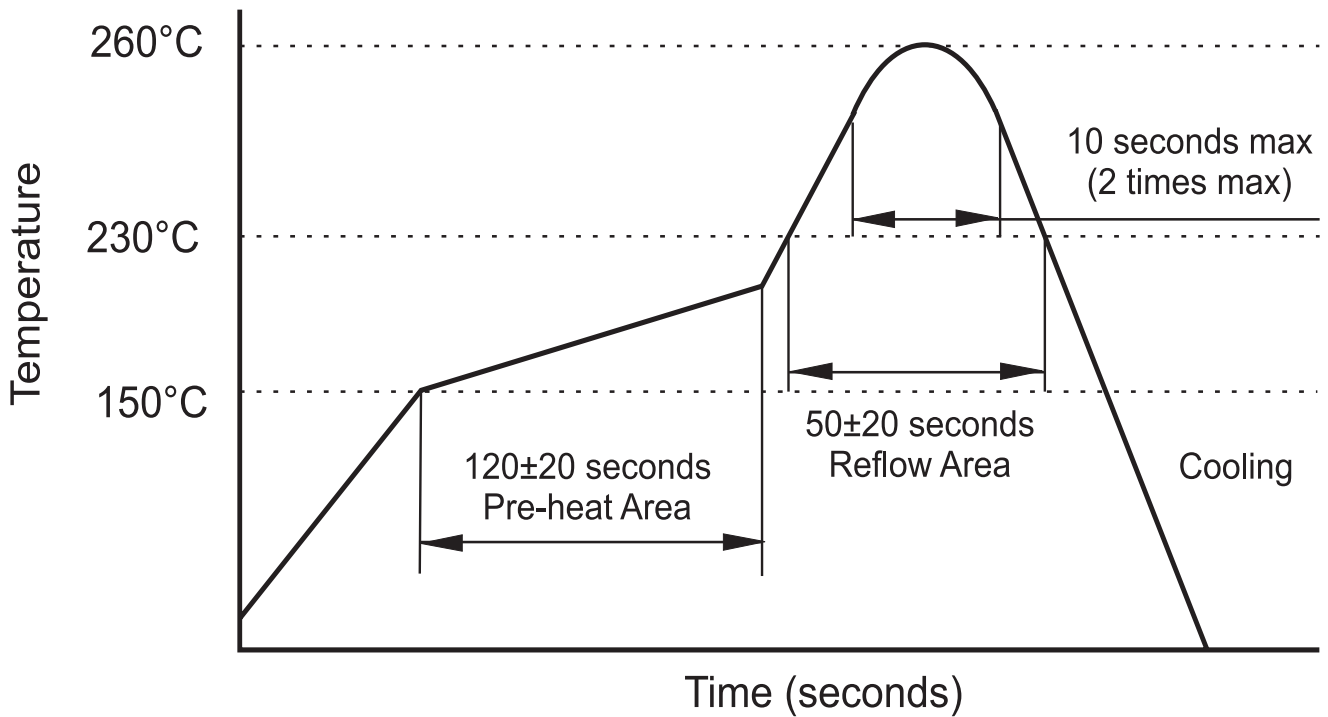

**How to build a Part Number:**

<b>Series</b>		<b>C</b>	<b>Parameter</b>
<b>Package</b>		<b>3E</b>	<b>3.2 x 2.5 mm</b>
		-	
<b>Frequency</b>		<b>12.000 to 52.000</b>	<b>MHz</b>
		-	
<b>Load Capacitance</b>		<b>7</b>	<b>7 pF</b>
		<b>10</b>	<b>10 pF</b>
		<b>12</b>	<b>12 pF</b>
		<b>16</b>	<b>16 pF</b>
		<b>18</b>	<b>18 pF</b>
		<b>20</b>	<b>20 pF</b>
		<b>32</b>	<b>32 pF</b>
		<b>S</b>	<b>Series</b>
		-	
<b>Frequency Tolerance (Note 1)</b>	<b>Standard</b>	<b>30</b>	<b>±30 PPM</b>
	<b>Option</b>	<b>25</b>	<b>±25 PPM</b>
		<b>20</b>	<b>±20 PPM</b>
		<b>15</b>	<b>± 15 PPM</b>
		<b>10</b>	<b>±10 PPM</b>
<b>Frequency Stability (Note 1)</b>	<b>Standard</b>	<b>50</b>	<b>±50 PPM</b>
	<b>Option</b>	<b>30</b>	<b>±30 PPM</b>
		<b>25</b>	<b>±25 PPM</b>
		<b>20</b>	<b>±20 PPM</b>
		<b>15</b>	<b>±15 PPM</b>
		<b>10</b>	<b>±10 PPM</b>
		-	
<b>Temperature Range</b>	<b>Standard</b>	<b>See Notes</b>	<b>-10 to +70 °C</b>
	<b>Extended</b>	<b>X</b>	<b>-40 to +85 °C</b>
		-	
<b>Packaging</b>		<b>R</b>	<b>Tape and Reel</b>

**Part Number Example:**

**C3E-32.768-18-3050-X-R**

**C3E- 2.5 x 3.2 mm SMD Seam Seal Crystal Unit**

**32.768 MHz Nominal Frequency**

**18 pF Load Capacitance**

**3050: ±30 PPM Frequency Tolerance and ±50 PPM Frequency Stability**

**Fundamental Mode**

**X: -40 to +85° C Temperature Range**

**R: Tape and Reel Packaging**

**Notes:**

- 1- Frequency Tolerance and Stability options are limited due to physical size.
- 2- Standard Temperature Range does not need to be included in Part Number description.
- 3- Product is shipped in Tape and Reel configuration. Each reel contains 3000 pieces.
- 4- Quantities less than 3000 are shipped bulk in ESD pouches.
- 5- Specification subject to change without notice.