



SERIES 76






FEATURES

- Raised and Recessed Rocker, and PIANO-DIP® Styles
- Sealed Base Standard
- Spring and Ball Contact
- Top Tape Seal Option



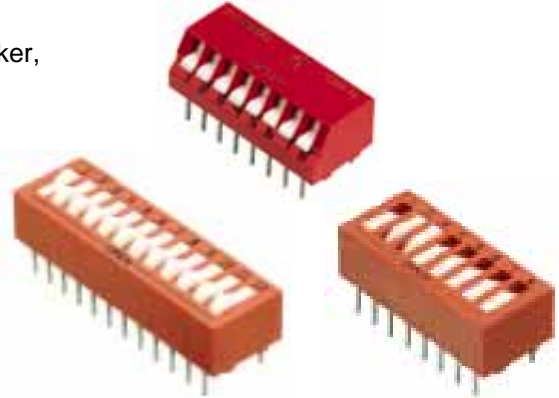


Surface Mount and Thru-Hole Dip Switches

DIMENSIONS In inches (and millimeters)

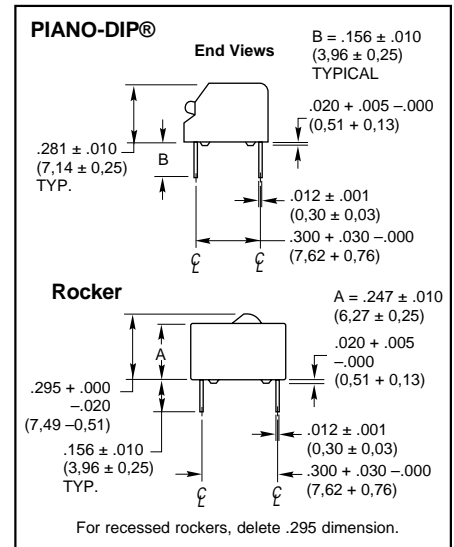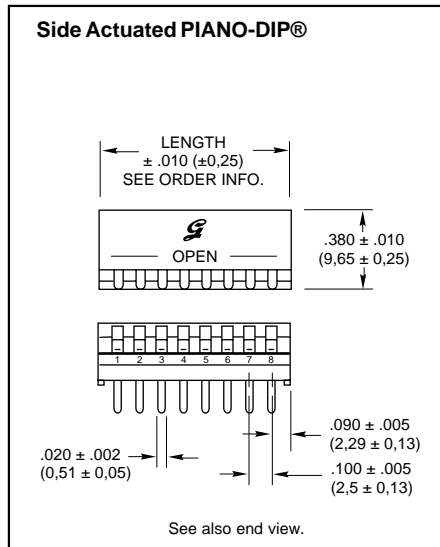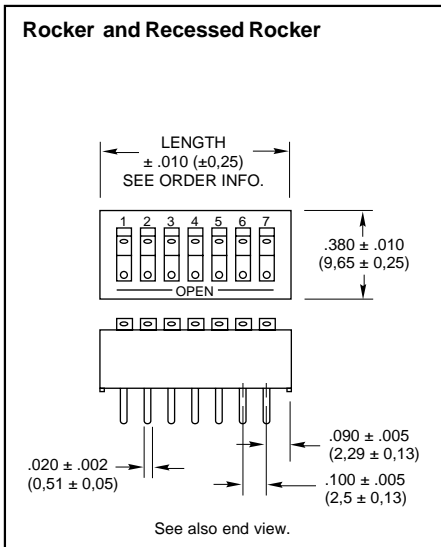

CIRCUITRY

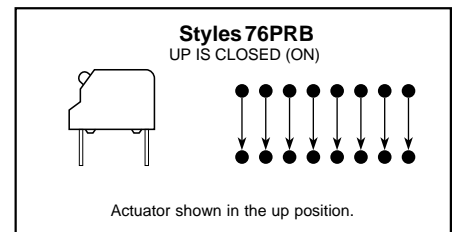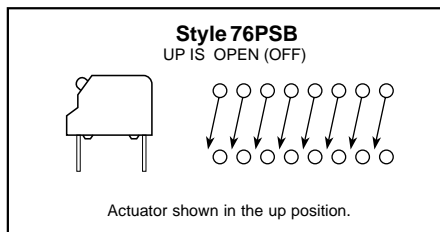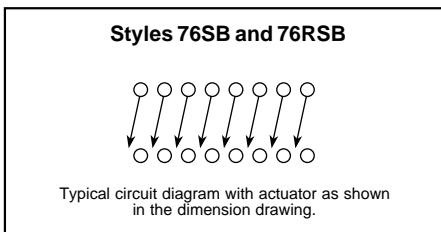

ORDERING INFORMATION

Series

Switch Style: SB = Raised Rocker
RSB = Recessed Rocker
PSB = Piano-DIP (Up is Off)
PRB = Piano-DIP (Up is On)

76RSB04S

Seal*: S = Tape Seal
Blank = No Seal

Number of Positions: 02 through 10, 12

No. of Pos.	Length (Inches)	Length (Metric)	No./Tube
2	0.280"	7,1 mm	35
3	0.380"	9,7 mm	27
4	0.480"	12,2 mm	21
5	0.580"	14,7 mm	18
6	0.680"	17,3 mm	15
7	0.780"	19,8 mm	13
8	0.880"	22,4 mm	12
9	0.980"	24,9 mm	10
10	1.080"	27,4 mm	9
12	1.280"	32,5 mm	8

*A top tape seal is required for switches that are machine soldered or heavily cleaned after hand soldering. To order top seal versions, add "S" to the Grayhill part number.

For Specifications, see page B-16.
For Options and Accessories, see page B-24.

Available from your local Grayhill Distributor
For prices and discounts, contact a local Sales Office, an authorized local Distributor, or Grayhill.

SPECIFICATIONS: Standard and Military Qualified Styles

Ratings	76	78	90B, 90HB
Mechanical Life: Operations per switch position	20,000	20,000	5,000
Make and Break Current Rating: Operations per switch position at these resistive loads			
1 mA, 5 Vdc; 50 mA, 30 Vdc; or 150 mA, 30 Vdc:	10,000	10,000	—
10 mA, 30 Vdc; or 10 mA, 50 mVdc:	—	—	2,000
10 mA, 50 mVdc; or 25 mA, 24 Vdc; or 100 mA, 6 Vdc:	—	—	2,000
Contact Resistance: Initially:	≤ 30 mΩ	≤ 30 mΩ	≤ 20 mΩ
After life, at 10 mA, 50 Vdc, open circuit:	≤ 100 mΩ	≤ 100 mΩ	≤ 100 mΩ
Insulation Resistance:			
Minimum, at 100 Vdc between adjacent closed contacts and also across open switch contacts			
Initially (megohms):	5,000	5,000	5,000
After life (megohms):	1,000	1,000	1,000
Dielectric Strength: Minimum voltage (AC, RMS) measured between adjacent closed contacts and also across open switch contacts.			
Initially:	750 V	750 V	500 V
After life:	500 V	500 V	500 V
Current Carry Rating: Maximum rise of 20°C	5 A	4 A	3 A
Switch Capacitance: At 1 megahertz	2 pF	2 pF	2 pF
Operating Temperature:	-40°C to + 85°C	-40°C to + 85°C	-40°C to + 85°C
Storage Temperature:	-55°C to + 85°C	-55°C to + 85°C	-55°C to + 85°C

Surface Mount and Thru-Hole DIP Switches

Environmental

Meets all requirements of MIL-S-83504. Where Grayhill performance is superior, the MIL spec is listed in parentheses.

Vibration: Per method 204, Test Condition B 1 microsecond opening (10 microseconds allowed)

Mechanical Shock: Per Method 213, Test Condition A. 1 microsecond opening (10 microseconds allowed)

Moisture Resistance: Per specification, Method 106.

Thermal Shock: Per specification; no failures; passes contact resistance.

Terminal Strength: Per specification

Thermal Aging: 1,000 hours at 85°C; no failures.

Machine Soldering

Series 90 MIDIP® and Series 76 recessed rocker (76RSB style) sealed switches have been tested to EIA Standard RS-448-2. Similar performance can be expected from other sealed Series 76 and 78 DIP switches.

Fluxing: Per EIA RS-448-2 with flux touching switch body.

Resistance to Soldering Heat: 76RSB: Passes EIA Standard using two, four, and six second soldering time. 90: Per MIL-S-83504, six second test.

Cleaning: 76RSB, 90: Passes immersion test using water/detergent.

Cleaning Solutions: Acceptable solutions include 1-1-1 trichlorethane, freon, (TF, TE, or TMS), isopropyl alcohol, detergent (140°F maximum). Terpene acceptable for Series 90 only. Solutions which are not recommended include acetone, methylene chloride, freon TMC.

Tape Seal Integrity: Passes gross leak test using 125°C flourinert for 20 seconds minimum. Reference MIL-STD-202, Method 112.

Materials and Finishes

Shorting Member (Ball): Brass, gold plated 10 microinches minimum over nickel barrier.

Base Contacts: Copper alloy, gold plated 10 microinches minimum over nickel barrier.

Terminals: Copper alloy, solder plated over nickel barrier.

Solderability: Per MIL-STD-202, Method 208

Non-Conductive Parts: Thermoplastic, UL94V-O rating.

Potting Material: Epoxy, 76,78 only.

Tape Seal:

76, 78: Polyester film

90: Polyimide film or foil

Protective Cover: 76,78, only-Polycarbonate.


OPTIONS

Position Identification Line Option

For Series 76RSB, 76RSC, 76RSD, & 90B
 A line can be added to the recessed rocker or Series 90 slide actuator to provide positive identification of the actuator position. To order, add L as a final suffix to the part number. For example, 76RSB08 becomes 76RSB08L; and, 90B08S becomes 90B08SL.
Available from a local Grayhill Distributor

Other Switch Marking


For Series 76, 78, & 90
 We can mark your part number or other wording on the switch, often at no charge. For some markings there will be a nominal charge for tooling plus a set-up charge. In addition, there is a marking charge per side per switch. Add it to the unit price and discount it accordingly.
To order, contact Grayhill.




ACCESSORIES

Protective Cover Accessory

For Series 76, & 78
 Rigid, clear plastic cover fits all but toggle actuated switches. It provides a top cover for less strenuous cleaning, serves as a dust cover in dirty environments, and provides protection against accidental actuation.
Material: 76,78, only-Polycarbonate.
 Purchase as a separate item. Check length of the desired DIP Switch, and then select from the ordering information on this page.
Available from a local Grayhill Distributor

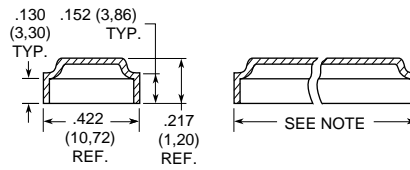

Note: For length, add .042" (1,07 MM) to length of DIP switch.




DIPSTICK Accessory

For all series
 Pen sized plastic DIPSTICK has a tapered end for actuating DIP Switches.

 Part Number **90-DIPSTICK**
Available from a local Grayhill Distributor

User Applied Tape Seals

For Series 76 & 78
 If you prefer to seal switches after your incoming inspection, order a card of 23 (or 46) tape seals. Hand application of these tapes provides less secure seal integrity than factory addition of seals. Check the length of the desired DIP Switch, then select the card of tapes from the chart below.
Available from a local Grayhill Distributor



ORDERING INFORMATION

Length Inches	No./ Card	Tape Seals Part Number
0.280	46	SHH1127-2
0.380	46	SHH1127-3
0.480	46	SHH1127-4
0.580	23	SHH1127-5
0.680	23	SHH1127-6
0.780	23	SHH1127-7
0.880	23	SHH1127-8
0.980	23	SHH1127-9
1.080	23	SHH1127-10

Length Inches	Protective Cover Part Number
0.280	76P02
0.380	76P03
0.480	76P04
0.580	76P05
0.680	76P06
0.780	76P07
0.880	76P08
0.980	76P09
1.080	76P10
1.180	79P10
1.780	79P16

Available from your local Grayhill Distributor
 For prices and discounts, contact a local Sales Office, an authorized local Distributor, or Grayhill.

Surface Mount and Thru-Hole DIP Switches