

修 订	标 记	修 改 描 述	签 名	日 期
REV	MARK	REVISION DESCRIPTION	SIGNATURE	DATE
AO		NEW DWG		2016-03-12



- 规格说明:Specifications:
- 电气特性:Electrical:
- 1. 额定电流: Current Rating
1.5A/contact terminal
 - 2. 额定电压: Voltage Rating
30V DC
 - 3. 接触阻抗:Contact Resistance
30 milliohms MAX
 - 4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
 - 5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

- 物理性能:Mechanical:
- 1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
 - 2. 端子保持力: Terminal Retenion
1.2kgf (MIN)






- 原材料:Material:
- 1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
LCP
 - 2. 端子:Contact:Copper Alloy C2680
 - 3. 外壳:Shell: Copper Alloy C2680/SPCC

- 电镀:Finish:
- 1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
 - 2. 外壳:Shell:
Nickel Plating

HDGC 深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD 电话: 0755-23304126 传真: 0755-29940187							
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: USB AF10.0前插后插6.3平口黑胶 产品名称: LCP0.25			
X.X	±0.30	X.X*	±3°	APPD: 核准:	PART NO: 产品编号: USB-ZD-137DIP		
X.XX	±0.20	X.XX*	±2°	CHECK: 校对: 王建业	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX*	±1°	DRAW: 绘图: 黄艳兰	2016-03-12	1:1	mm
					CODE NUMBER	A001	

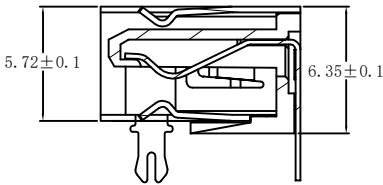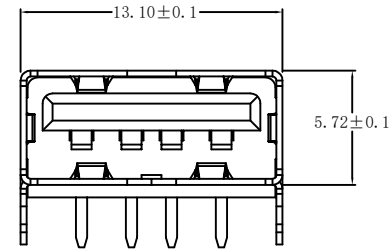

SECTION A-A

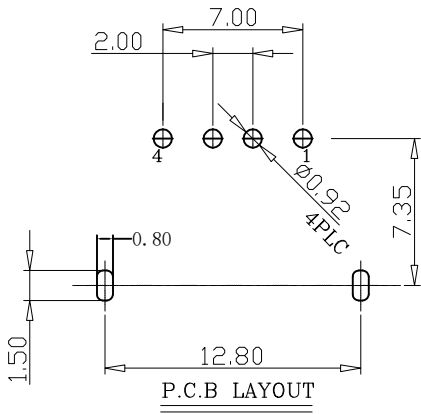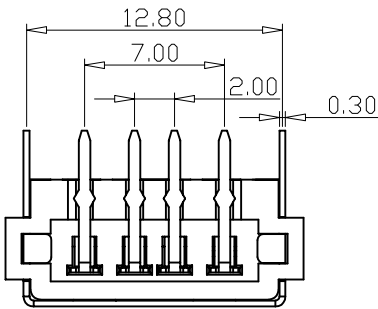

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作