
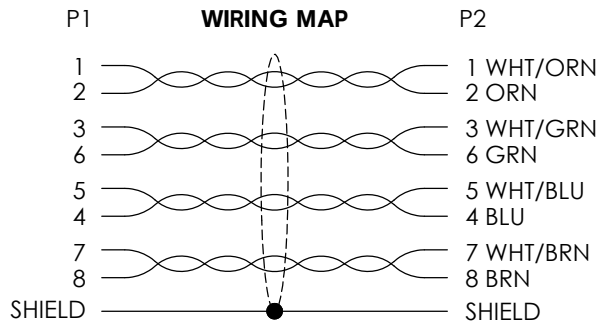


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/14/2020	GUTTADAURO

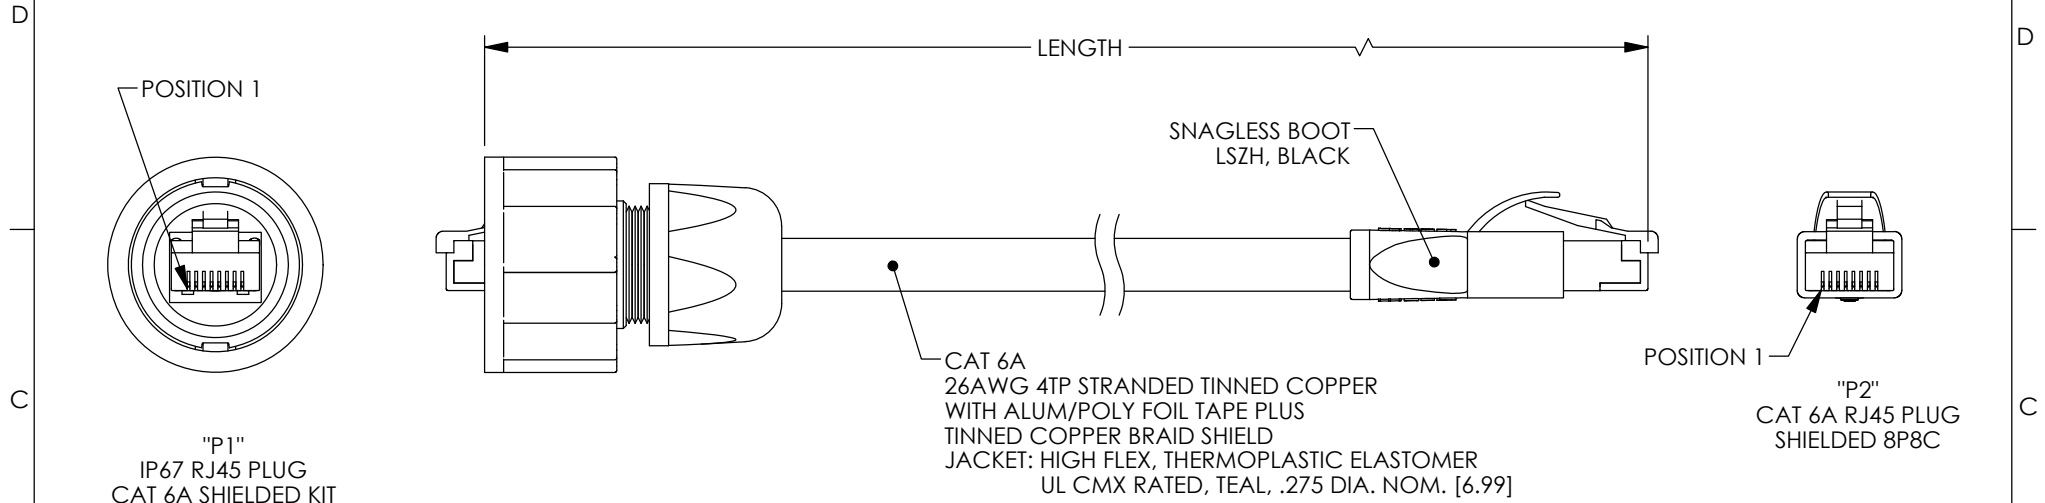

MODEL NUMBER	LENGTH METERS [FEET]
TRG695AHF1-05M	0.5 [1.64]
TRG695AHF1-1M	1.0 [3.28]
TRG695AHF1-2M	2.0 [6.56]
TRG695AHF1-3M	3.0 [9.84]
TRG695AHF1-5M	5.0 [16.41]
TRG695AHF1-10M	10.0 [32.81]

NOTES:

- OIL AND UV RESISTANT CABLE IS SUITABLE FOR OUTDOOR OR INDUSTRIAL APPLICATIONS.
- "P1" IS IP-67 RATED WHEN MATED SECURELY.
- CONNECTOR TEMPERATURE RATING: -40° C TO +68° C
CABLE TEMPERATURE RATING: -40° C TO +75° C
- LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
- PLUG CONFORMS TO TIA-1096.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		L-com™ an INFINITI® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DFRISIELLO		01/13/2020			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]		CHECKED BY GUTTADAURO		01/14/2020			
		APPROVED BY GUTTADAURO		01/14/2020			
THIRD-ANGLE PROJECTION 		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY TELECOM/MODULAR		PRODUCT DESCRIPTION IP67RJ45/RJ45 C6A SF/UTP TPE TEL HFX	
		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 43321	ITEM NO. TRG695AHF1	REV. A
				SCALE: NONE CAD FILE: TRG695AHF1.SLDDRW			SHEET 1 OF 1