
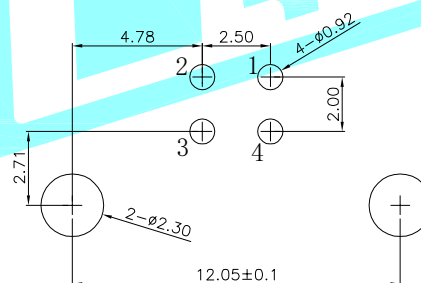
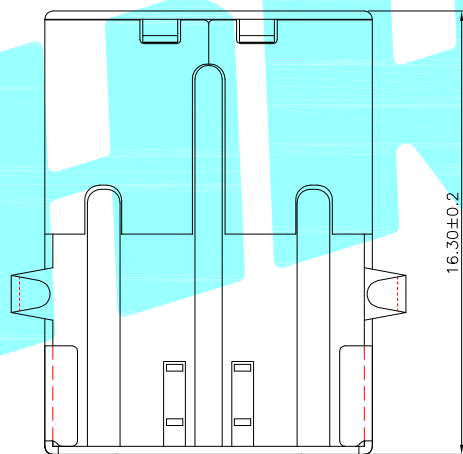
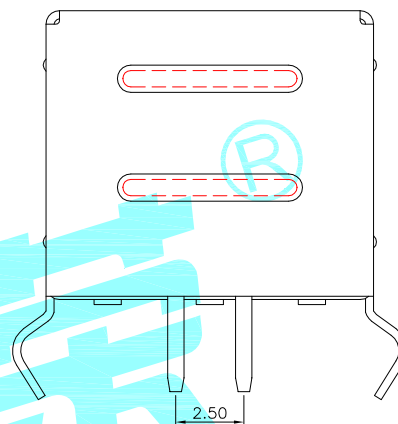
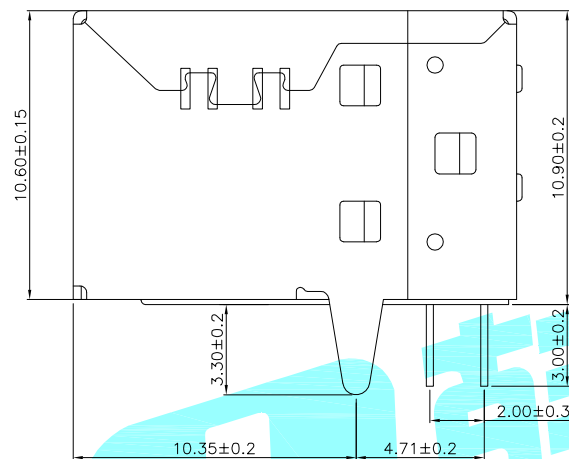


ROHS

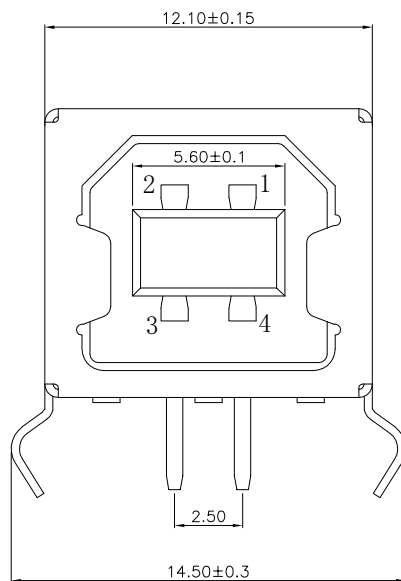

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

Recommended PCB Layout

③	Base	—	1	PBT	White UL94V0
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

APPROVALS			DATE		HRO[®] 弘睿 ELECTRONICS CO.,LTD		
DRAWN	JIANKUN.LU	2015.03.18					
CHECKED				TITLE:	USB CONNECTOR		
APPROVALS				PART NO.	U-B-M4DD-W-1A		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.25					
	5~10	±0.20					
	~ 5	±0.15					
			±2'	DRAWING NO.			SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			