

NOTES1:

- UL Standard
 1. Rated voltage/current : 300V / 8A
 2. Withstanding voltage : AC1600V/1Min.
 3. Wire range : 24~16AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	160V	160V
Rate current(A)	8A		

2. Wire range : 0.2~1.0mm², 1.5mm²(sol)

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 3.81mm, Poles : N=04~48P
 3. Stripping length : 8~9mm
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:





Pitch range in mm	Nominal dimension range			mm
	Over	Over	Over	
6 TO 10	6 TO 10	30 TO 60	60 TO 100	0.1/10
10 TO 15	10 TO 15	30 TO 60	100 TO 150	≤
15 TO 20	15 TO 20	30 TO 60	100 TO 150	±2°

6. RoHS Compliance

Ordering Information

JL15EDGKNHCM-381 XX G 0 1

Pitch 381=381PH
 No. of pins 4P~48P
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow D=Orange E=Grey
 Packing 0=Pe too G=Tube A=Tray

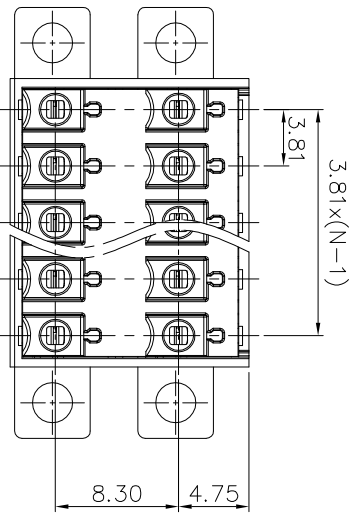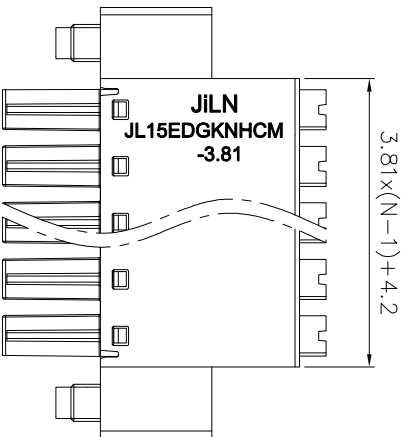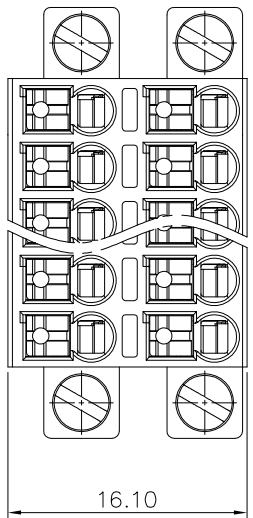

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.06.08

DRAW	SHUANGPING ZHENG		SCALE	FIT	<p>JILIN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD</p>	PART NO.	JL15EDGKNHCM-381XXG01
CHECK	LICHAD	LIJU	UNIT	mm		SIZE	A4
APPROVE	YONGLIANG GAO		SHEET	1/1		PROJ	
TITLE:		JL15EDGKNHCM-381-2XNP 插拔式母座/绿色					