

NOTES1:

- 1. Rated voltage/current : 150V / 5A
- 2. Withstanding voltage : AC1250V/1Min.
- 3. Wire range : 30~20AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate Impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

- 2. Wire range : 0.2~0.5mm<sup>2</sup>

NOTES2:


- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5mm, Poles : N=04~48P
- 3. Stripping length : 7~8mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over 6	TO 10	Over 30	TO 60	Over 100	TO 150
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
					±2°

6. RoHS Compliance

Ordering Information

JL15EDGKD~~H~~-350 XX **B 0 1**

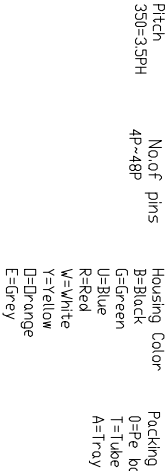






5	Spring	Stainless Steel	
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66-GF	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DRAW	SHUANGPING ZHENG
CHECK	LICHAD LIU
APPROVE	YINGLIANG GAO

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.	JL15EDGKD <del>H</del> -350XXB01
	JL15EDGKD <del>H</del> -3.5-2XN <del>P</del> 插拔式母座/黑色
TITLE:	

**JILIN** 东莞市锦凌电子有限公司  
DONGGUAN JINLING ELECTRONIC CO., LTD

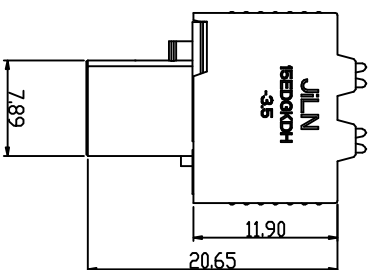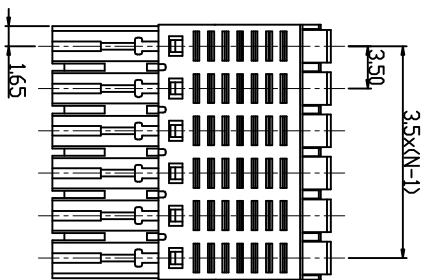

REVISION RECORD			
REV	EON	DESCRIPTION	DATE
A		NEW	22.12.15