

(M) BA-2SBT
ISSUE 4

CATALOG LISTING
BA-2SBT
PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
10

RELEASE NO.

CHECK

20 MAR. 57

REVISIONS

A CO 9600
K.F.M.
30 JAN. 57

B CO13652
I.Y.O.
3 FEB 60

C CO 28424
S.R.H.
26 JAN 71

D CO63005
J.W.H.
24 MAR. 57

E CO- 69351-D
J.A.P.
5 APR 88

F CO- 95750-B
CSL
3 APR 00

CHECK

21 MAR. 57

CHECK


30 JAN. 57

DRAWN

K.F.M.

FORMTEK

FO-50378

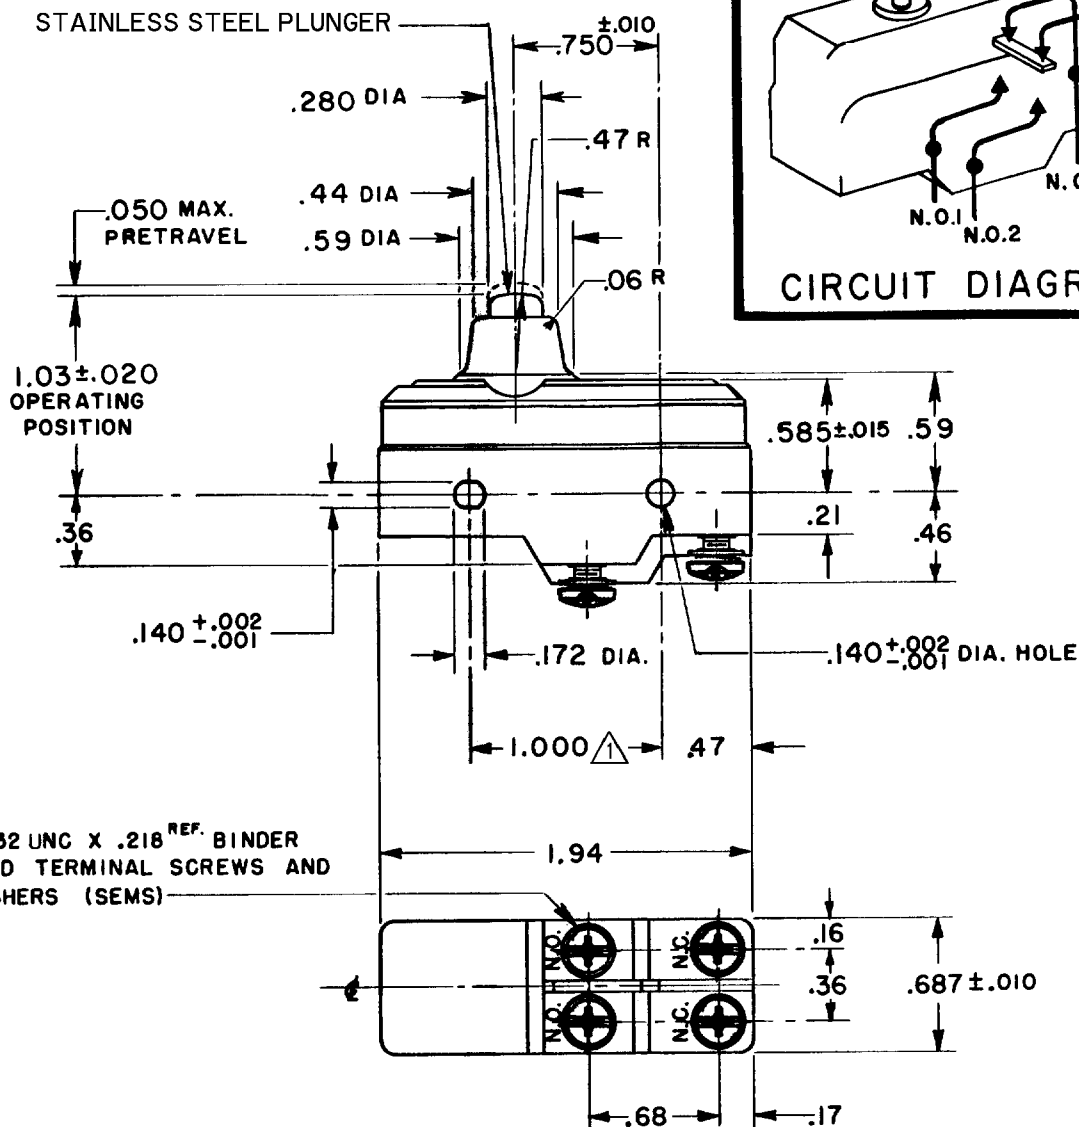

6-32 UNC X .218^{REF.} BINDER
HEAD TERMINAL SCREWS AND
WASHERS (SEMS)

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX. DIA. ON 1.000 ± .002 CENTERS
- 2 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A
RAPID STROKE TO THE SWITCH PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF
HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 22-30 OZ.
RELEASE FORCE - - - - - 10 OZ. MIN.
DIFFERENTIAL TRAVEL - - - .004 - .010
OVERTRAVEL - - - - - .094 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

30 VOLTS D C RATING (SEA LEVEL TO 50,000 FT)
INDUCTIVE - - - - - 25 AMP
RESISTIVE - - - - - 30 AMP
MAXIMUM INRUSH - - - - - 75 AMP
BASED ON LIFE OF 25,000 OPERATIONS

25A 125, 250, OR 480 VAC
3/4 HP 125 VAC, 1 1/2 HP 250 VAC
1A 125 VDC, 0.5A 250 VDC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

