

## RJ45 sleeve housings - VS-08-T-RJ45/IP67 - 1688696

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



RJ45 sleeve housing, IP67, for pin insert VS-08-ST-RJ45, with push-pull interlocking for panel mounting frames, for cable cross section 5.0 mm ... 6.5 mm



### Ethernet

#### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	5 pc
Weight per Piece (excluding packing)	15.64 g
Custom tariff number	85472000
Country of origin	Germany

#### Technical data

##### Mechanical characteristics

Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 6.5 mm
Cable exit	straight
Color	gray
Tightening torque max.	2.5 Nm

##### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP67

##### Material data

Flammability rating according to UL 94	V0
Housing material	PA
O-ring material	FPM
Cable seal material	NBR

## RJ45 sleeve housings - VS-08-T-RJ45/IP67 - 1688696

### Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260705
eCl@ss 7.0	27440312
eCl@ss 8.0	27440202

ETIM


ETIM 2.0	EC000764
ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

### Drawings

Dimensional drawing

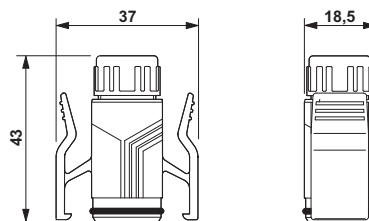

RJ45 sleeve housing IP67