

Web site: www.marinco.com

Phone: 800-307-6702

Date: July, 2011 Rev: 03

Receptacle, locking
20A, 125/250V
3-Pole, 4-Wire

Catalog Number: 2014R.OEM.NMS

Item: Receptacle, single locking. Provided without mounting screws.

Rating: 20 amperes, 125/250 volts, NEMA configuration L14-20R.


Materials: All plastic parts are black, glass-filled, heat resistant nylon with a UL flammability rating of 94V-0.
Mounting straps, rivets and grounding strip are solid brass.

Terminals: Clamp-type. Clamp is solid brass, and terminal screws are solid brass, No. 10, slot/cross head. Cross head accommodates #2 driver.

Contacts: All contacts are brass, rivetless one-piece construction, nominal 0.045" thick.

Certification: UL listed, File E111198; CSA certified, File LR81290.

Dimensions:

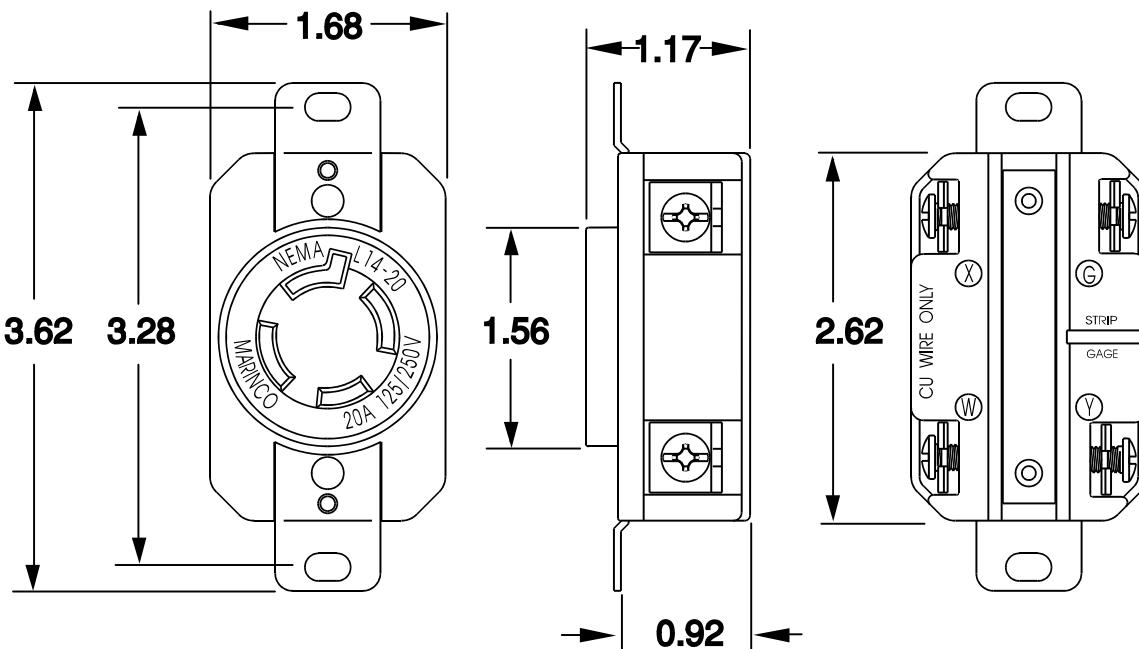

Dimensions shown in inches