

General Description

The CMS60P06 uses advanced trench technology to provide excellent RDS(ON). This device is ideal for load switch and battery protection applications.

Features

- P-Channel MOSFET
- Low ON-resistance
- Surface Mount Package
- RoHS Compliant


Product Summary

BVDSS	RDSON	ID
-60V	21mΩ	-10A

Applications

- Load switch
- Power management
- Battery protection

SOP-8 Pin Configuration

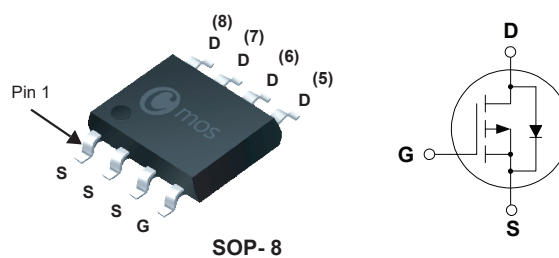

Type	Package	Marking
CMS60P06	SOP- 8	CMS60P06

Absolute Maximum Ratings (TA=25 °C Unless Otherwise Noted)

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	-60	V
V _{GS}	Gate-Source Voltage	±20	V
I _D	Continuous Drain Current	-10	A
I _{DM}	Pulsed Drain Current	-30	A
EAS	Single Pulse Avalanche Energy	260	mJ
P _D @T _C =25°C	Total Power Dissipation	10.4	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance, Junction-to-Ambient(PCB mounted)	---	40	°C/W

Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=-250\mu A$	-60	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=-10V$, $I_D=-15A$	---	---	21	$m\Omega$
		$V_{GS}=-4.5V$, $I_D=-10A$	---	---	25	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D = -250\mu A$	-1	---	-3	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-60V$, $V_{GS}=0V$	---	---	-1	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS} = \pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=-5V$, $I_D=-10A$	---	35	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1MHz$	---	12	---	Ω
Q_g	Total Gate Charge	$V_{DS}=-30V$, $V_{GS}=-4.5V$ $I_D=-5A$	---	39	---	nC
Q_{gs}	Gate-Source Charge		---	17	---	
Q_{gd}	Gate-Drain Charge		---	20	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-2V$, $V_{GS} = -10V$, $I_D = -5A$ $R_{GEN} = 1\Omega$, $R_L = 2\Omega$	---	11	---	ns
T_r	Rise Time		---	8	---	
$T_{d(off)}$	Turn-Off Delay Time		---	71	---	
T_f	Fall Time		---	41	---	
C_{iss}	Input Capacitance	$V_{DS}=-25V$, $V_{GS}=0V$, $f=1MHz$	---	1600	---	pF
C_{oss}	Output Capacitance		---	390	---	
C_{rss}	Reverse Transfer Capacitance		---	290	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_{SD}=-15A$	---	---	-1.2	V

This product has been designed and qualified for the consumer market.
 Cmos assumes no liability for customers' product design or applications.
 Cmos reserves the right to improve product design ,functions and reliability without notice.