

## Surge protection device - CN-UB-280DC-3-BB - 2801050

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Attachment plug with replaceable surge protection for coaxial signal interfaces. Connection: N connector socket/ socket

### Your advantages

- ✓ For outdoor installations
- ✓ Mounting plate enables mounting, e.g., in a control cabinet
- ✓ Replaceable, gas-filled arrester
- ✓ Installed as surge protection between antenna and wireless module

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 675727
GTIN	4046356675727
Weight per Piece (excluding packing)	180.000 g
Custom tariff number	85363010
Country of origin	China

### Technical data

#### Dimensions

Height	33.5 mm
Width	31 mm
Length	57.8 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

## Surge protection device - CN-UB-280DC-3-BB - 2801050

### Technical data

#### Ambient conditions

Altitude	2000 m
Degree of protection	IP55
	IP55

#### General

Housing material	HPb59-1
Color	nickel
Standards for clearances and creepage distances	IEC 60664-1
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Number of positions	1
Direction of action	Line-Shield/Earth Ground

#### Protective circuit

IEC test classification	C2
	C3
	D1
Maximum continuous voltage $U_C$	280 V DC
Maximum continuous voltage $U_C$ (line-earth)	280 V DC
Rated current	5 A (25 °C)
Operating effective current $I_C$ at $U_C$	$\leq 1 \mu\text{A}$
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$	20 kA
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-earth)	20 kA
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-shield)	20 kA
Total surge current (10/350) $\mu\text{s}$	2.5 kA
Total discharge current $I_{\text{total}}$ (8/20) $\mu\text{s}$	20 kA
Max. discharge current $I_{\text{max}}$ (8/20) $\mu\text{s}$	20 kA
Max. discharge current $I_{\text{max}}$ (8/20) $\mu\text{s}$ maximum (line-earth)	20 kA
Max. discharge current $I_{\text{max}}$ (8/20) $\mu\text{s}$ maximum (line-shield)	20 kA
Nominal pulse current $I_{\text{an}}$ (10/1000) $\mu\text{s}$ (line-shield)	100 A
Impulse discharge current (10/350) $\mu\text{s}$ , peak value $I_{\text{imp}}$	2.5 kA
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-earth) spike	$\leq 900 \text{ V}$
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-shield) spike	$\leq 900 \text{ V}$
Voltage protection level $U_p$ (line-earth)	$\leq 1.1 \text{ kV}$ (C2 - 10 kV / 5 kA)
	$\leq 900 \text{ V}$ (C1 - 1 kV/500 A)
Voltage protection level $U_p$ (line-shield)	$\leq 900 \text{ V}$ (C1 - 1 kV/500 A)
	$\leq 1.1 \text{ kV}$ (C2 - 10 kV / 5 kA)
Response time $t_A$ (line-earth)	$\leq 100 \text{ ns}$

## Surge protection device - CN-UB-280DC-3-BB - 2801050

### Technical data

#### Protective circuit

Response time $t_A$ (line-shield)	$\leq 100$ ns
Input attenuation $a_E$ , asym.	typ. 0.1 dB ( $\leq 3$ GHz)
Cut-off frequency $f_g$ (3 dB), asym. (shield) in 50 Ohm system	$> 3$ GHz
Frequency range	0 Hz ... 3 GHz
Standing wave ratio SWR in a 50 $\Omega$ system	typ. 1.15 ( $\leq 3$ GHz)
	max. 1.2
Permissible HF power $P_{max}$ at VSWR = xx (50 ohm system)	700 W (VSWR = 1.1)
	200 W (VSWR = $\infty$ )
Capacity (line-earth)	typ. 1.5 pF
Capacity asymmetrical (shield)	typ. 1.5 pF
Surge protection fault message	none
Impulse durability (line-earth)	C2 - 10 kV / 5 kA
	C3 - 100 A
	D1 - 2.5 kA

#### Connection data

Connection method	N connector 50 $\Omega$
Connection method IN	N connector, female
Connection method OUT	N connector, female


#### Standards and Regulations

Standards/specifications	IEC 61643-21/A1 2008
	EN 61643-21/A1 2009


### Drawings

# Surge protection device - CN-UB-280DC-3-BB - 2801050


Application drawing

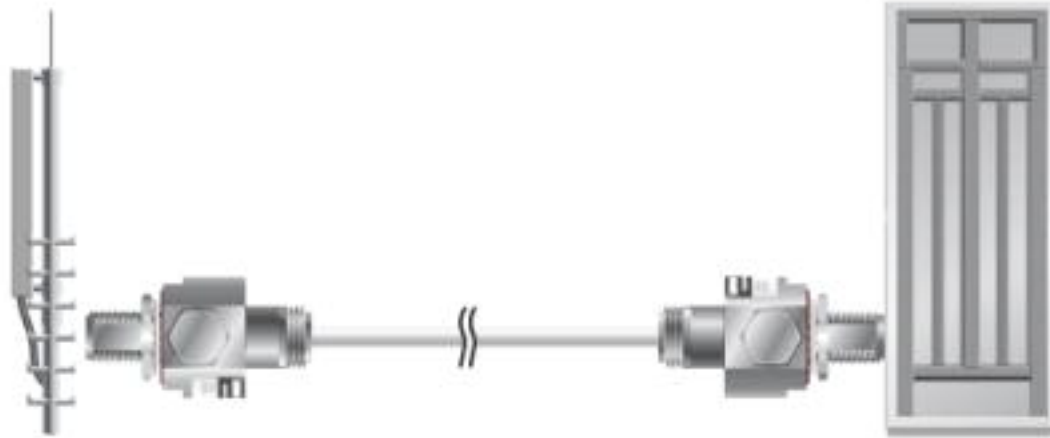

Diagram

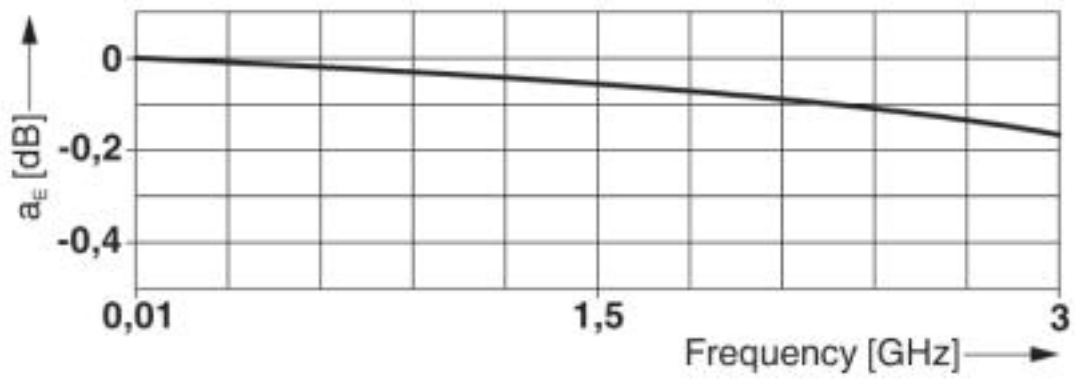


Diagram

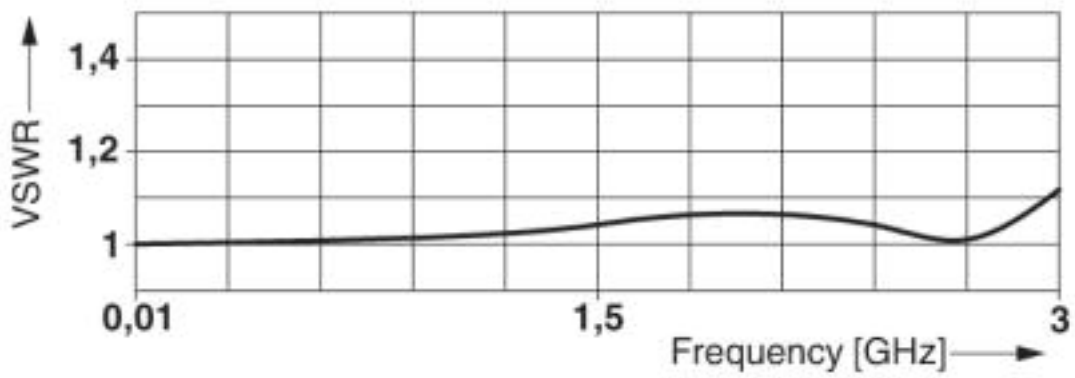


# Surge protection device - CN-UB-280DC-3-BB - 2801050

Dimensional drawing

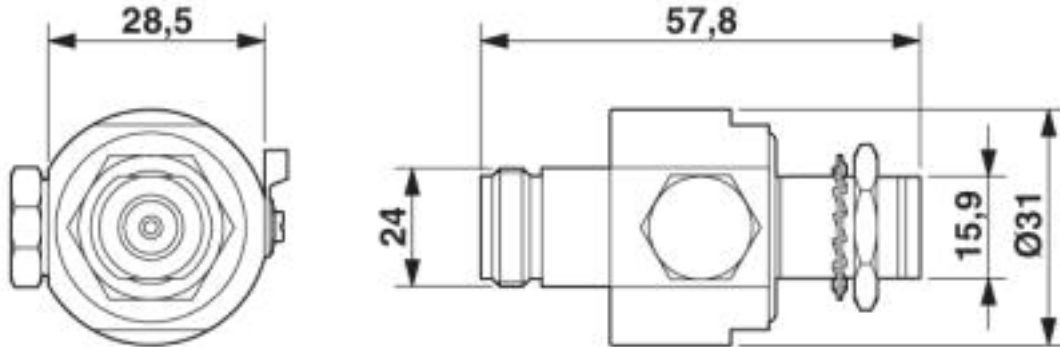

Dimensional drawing  
CN-UB-280DC-3-BB

Circuit diagram

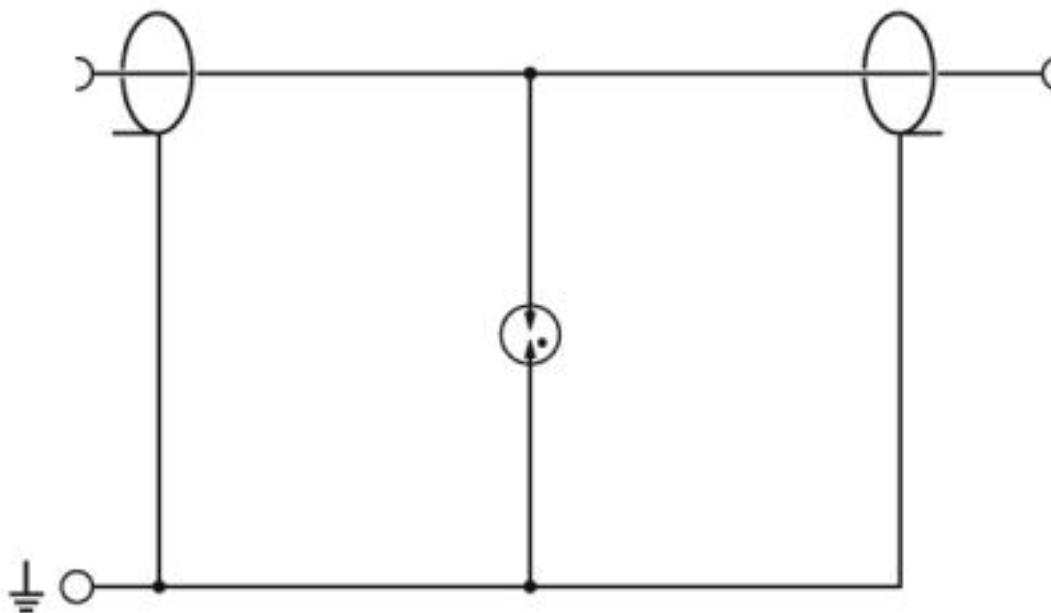

Circuit diagram

## Classifications

eCl@ss

eCl@ss 4.0	27130800
eCl@ss 4.1	27130800
eCl@ss 5.0	27130800

## Surge protection device - CN-UB-280DC-3-BB - 2801050

### Classifications

#### eCl@ss

eCl@ss 5.1	27130800
eCl@ss 6.0	27130800
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

#### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943
ETIM 6.0	EC000943
ETIM 7.0	EC000943

#### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

### Approvals

#### Approvals

---

Approvals


EAC

---

Ex Approvals

---

#### Approval details

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

## Surge protection device - CN-UB-280DC-3-BB - 2801050

### Accessories

#### Accessories

#### Assembly adapter

Mounting plate - CN-UB/MP - 2818135



Tongue for attaching the CN-UB..., to housing panels, for example.

---

Mounting plate - CN-UB/MP-90DEG-50 - 2803137



Angled bracket for individually fixing CN-UB... to housing panels, for example.

---

### Spare parts

Gas-filled surge arrester - CN-UB-G1 - 2818203



Reserve gas-filled surge arrester for CN-UB-280DC...

---