



Guide Key : Inside Color : Natural

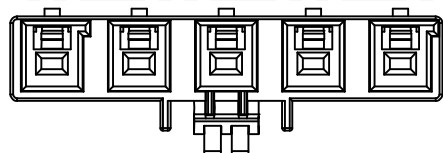

Guide Key : Right Side Color : Black

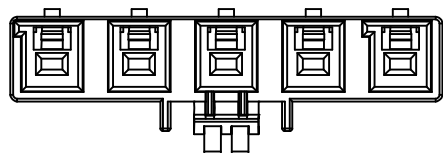

Guide Key : Left Side Color : Black

Specifications:

规格:

- Voltage rating:600V AC/DC
- 额定电压: 600V AC/DC
- Withstanding voltage:2500V AC/minute
- 耐受电压: 2500V AC/分钟
- Temperature range:-40℃~+125℃
- 温度范围: -40℃~+125℃
- Insulation resistance:1000MΩ min
- 绝缘电阻: 1000MΩ Min
- Contact resistance:5mΩ Max
- 接触电阻: 5mΩ Max

K 792100 H - XX - N0 X
① ② ③ ④ ⑤ ⑥

- 1.K: XKBTEK-Car Connector
- 2.XKB Series No
- 3.Category:H-Housing
- 4.Row No.Pin No:XX-01~05 Pin
- 5.Material:N0-PA66 UL 94V-0
- 6.Color:B-Black ;R-Red ;Blank-Natural

Poles	10 AWG	12 AWG	14 AWG	16 AWG
1	30 A	25 A	20 A	15 A
2	25 A	20 A	18 A	15 A
3	25 A	20 A	18 A	15 A
4	22 A	18 A	15 A	13 A
5	22 A	18 A	15 A	13 A

PART NO	DIM A	DIM B
01	8.00	/
02	15.50	7.92
03	23.42	15.84
04	31.34	23.76
05	39.26	31.68

PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal
K792100H-XX-N0X	PA66	K792100W	K792100T

DSND	SCALE: N/A	MODEL TYPE: 7.92mm Automobile connector
DWN	VIEW:	PART NO.: K792100H-XX-N0X
CHKD	UNIT: mm/in	DWG NO.: X-K792100H-XX-N0X
APPD	SIZE: A4	WEIGHT SHEET REVISION



XKB INDUSTRIAL PRECISION CO.,LIMITED

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGLAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5