
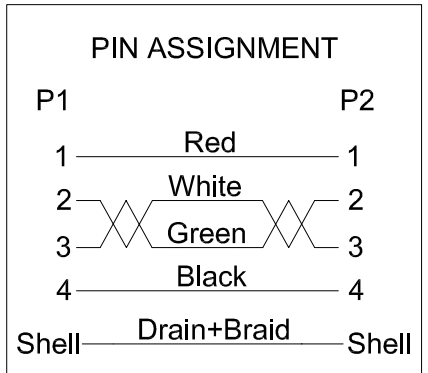
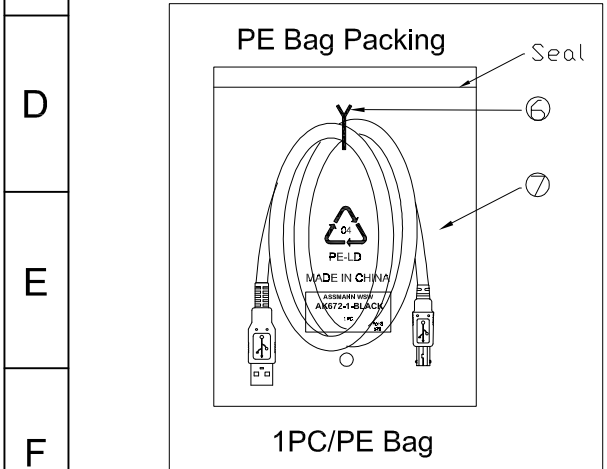


1 2 3 4 5 6 7

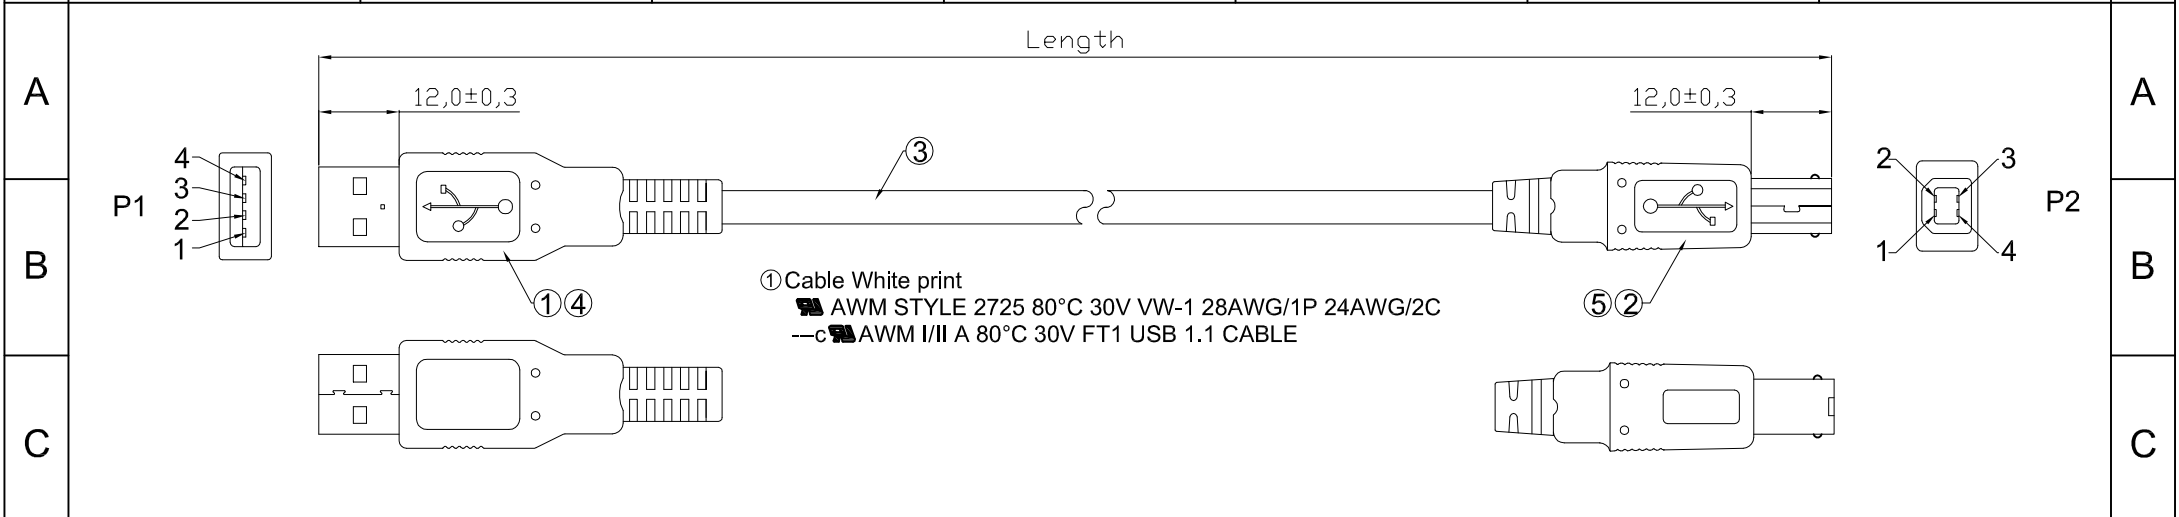

WSW P/N	Jacket color	Length(mm)
AK672-1-BLACK	Black	1000±30
AK672-2-BLACK	Black	2000±50
AK672-3-BLACK	Black	3000±50
AK672-5-BLACK	Black	5000±50

Electrical test:

- 100% short, open, miswire test
- Conduct resistance: 2 Ohm max.
- Insulator resistance: 5Mohm min.
- Dielectric test: DC 300V

NO.	NAME.	Q'TY	SPECIFICATION	
⑦	PE Bag	1	Clear	Print black "MADE IN CHINA"+ "1PC"
⑥	TIE	1	Black	
⑤	Out Jacket	6g	Black	PVC-45P
④	Out Jacket	6g	Black	PVC-45P
③	Cable	1	Black	USB 1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
②	CONN	1	USB B Male Shell:Nickel	Pin:G/F Insulator color: White
①	CONN	1	USB A Male Shell:Nickel	Pin:G/F Insulator color:White

RoHS compliant
 Unit: mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	24.10.2014	Winnie
					Approved	26.01.2016	Amy
							ASSMANN WSW-No. AK672-x-BLACK
DIM	TOL	①	Update the drawing	26.01.2016	Amy	Drawing-No. ASS 7248 CA rev01	
		②	Drawn	24.10.2014	Winnie	Replace	
Angle	TOL	Id.	Modification	Date	Name	Sheet	



1 2 3 4 5 6 7