100

CIRCULAR CONNECTORS


Push-pull connectors cable mounted plug CCA2 series

CCA2P1/A03 3 pole

- Premium range of circular connectors
- IP68 sealed using vacuum technology (when connected and using environmental cable clamp)
- Tough, high performance interconnection solution
- · Ideal for harsh and extreme environments
- Suitable for broadcasting, autosport, military, rail, marine, security, industrial and agricultural applications
- · Key coded to prevent misconnection
- Will not disconnect when the cable is under load or stress
- Tested to IEC 60512-3-5a



PART NO.	DESCRIPTION	POLES	SERIES
CCA2P1/A03	Cable mounted plug	3	CCA series

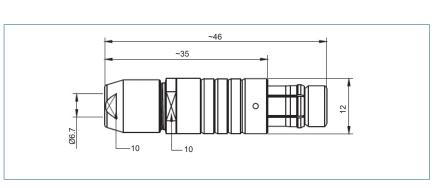

SPECIFICATION Cable mounted straight plug, male contact Shell style/model Code 1 Codes Contact type Contact diameter 1.18mm AWG 17-18 Max. stranded conductor Max diameter 0.43mm 1200V(AC) 1800V(DC) 1500V(AC) 2000V(DC) Vtest (contact-contact) Rated current 12A Rated voltage ≤250V Mechanical operation 5000 mating cycles Brass (natural chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces Housing material Brass (gold plated) Contacts Humidity (max) <=95% [at 60°C /140°F] 15g [10 Hz - 2000 Hz] Shock resistance 100g [6 ms] Salt spray corrosion >72 hr Climatical category 50/175/21 Shielding (min) 75 dB (10 MHz) 40 dB (1 GHz) Shielding (min) IP68 (when connected and IP rating using environmental cable clamp)

This product should be used with the following cable clamps:

PART NO.	WIRE RANGE
CCV2C/CE	3.7 - 4.2mm
CCV2C/CG	4.2 - 4.7mm
CCV2C/CH	4.7 - 5.2mm
CCV2C/CI	5.2 - 5.7mm
CCV2C/CJ	5.7 - 6.2mm







Non IP68 cable clamps also available

ACCESSORIES

Metal cap for plugs

PART NO.	DESCRIPTION
CCA22	Camcirc metal cap for plug A2



ASSOCIATED PRODUCTS

CCB2S1/03

-CCB series A2 size socket

page 133

107