

Technical Data Sheet Top Infrared LED IR67-21C/L261/S65/TR8(DVP-2)

Features

- Compatible with infrared and vapor phase reflow solder process.
- Low forward voltage.
- View angle 120°
- Pb free
- The product itself will remain within RoHS compliant version.



Description

- IR67-21C/L261/S65/TR8(DVP-2) is an infrared emitting diode in miniature SMD package which is molded in a water clear plastic with spherical top view lens. The device is spectrally matched with silicon photodiode and phototransistor


Applications

- Sensor
- Optoelectronic switch
- Camera
- VCR
- Video
- Smoke detector

Device Selection Guide

| Device No. | Chip Material | Lens Color |
|------------------------------|---------------|-------------|
| IR67-21C/L261/S65/TR8(DVP-2) | GaAlAs | Water Clear |

Package Dimensions

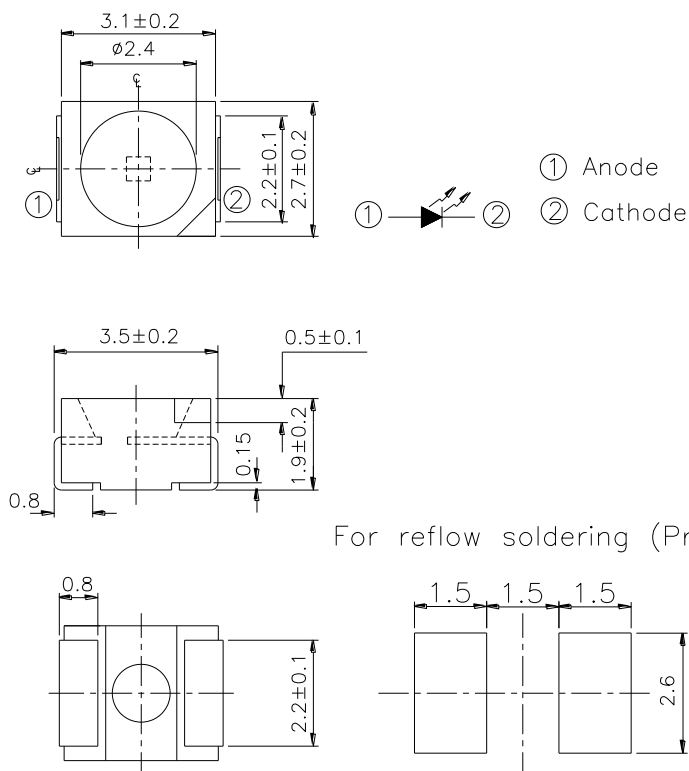

- Notes:** 1.All dimensions are in millimeters
2.Tolerances unless dimensions $\pm 0.1\text{mm}$

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

| Parameter | Symbol | Rating | Unit |
|---|-----------|------------|------------------|
| Continuous Forward Current | I_F | 65 | mA |
| Peak Forward Current *1 | I_{FP} | 1000 | mA |
| Reverse Voltage | V_R | 5 | V |
| Operating Temperature | T_{opr} | -40 ~ +85 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 ~ +100 | $^\circ\text{C}$ |
| Soldering Temperature *2 | T_{sol} | 260 | $^\circ\text{C}$ |
| Power Dissipation at(or below) 25°C Free Air Temperature | P_c | 130 | mW |

Notes: *1: I_{FP} Conditions--Pulse Width $\leq 100 \mu\text{s}$ and Duty $\leq 1\%$.

***2. Soldering time ≤ 5 seconds.**

Electro-Optical Characteristics (Ta=25°C unless specified otherwise)

| Parameter | Symbol | Min. | Typ.* | Max. | Unit | Condition |
|--------------------|-----------------|------|-------|------|-------|---|
| Radiant Intensity | I_E | 1.30 | 2.00 | 3.50 | mW/sr | $I_F=20mA$ |
| | | 4.00 | 8.00 | -- | | $I_F=100mA$ Pulse Width=100μs Duty≤1% |
| Peak Wavelength | λ_p | -- | 940 | -- | nm | $I_F=20mA$ |
| Spectral Bandwidth | $\Delta\lambda$ | -- | 50 | -- | nm | $I_F=20mA$ |
| Forward Voltage | V_F | -- | 1.20 | 1.50 | V | $I_F=20mA$ |
| | | -- | 1.45 | 1.80 | | $I_F=100mA$ Pulse Width=100μs Duty≤1% |
| Reverse Current | I_R | -- | -- | 10 | μA | $V_R=5V$ |
| View Angle | $2\theta_{1/2}$ | -- | 120 | -- | Deg. | $I_F=20mA$ |


Rank

Condition : $I_F=20mA$


Unit : mW/sr

| Bin Number | G | H |
|------------|-----|-----|
| Min | 1.3 | 2.0 |
| Max | 2.5 | 3.5 |

Typical Electrical/Optical/Characteristics Curves for IR

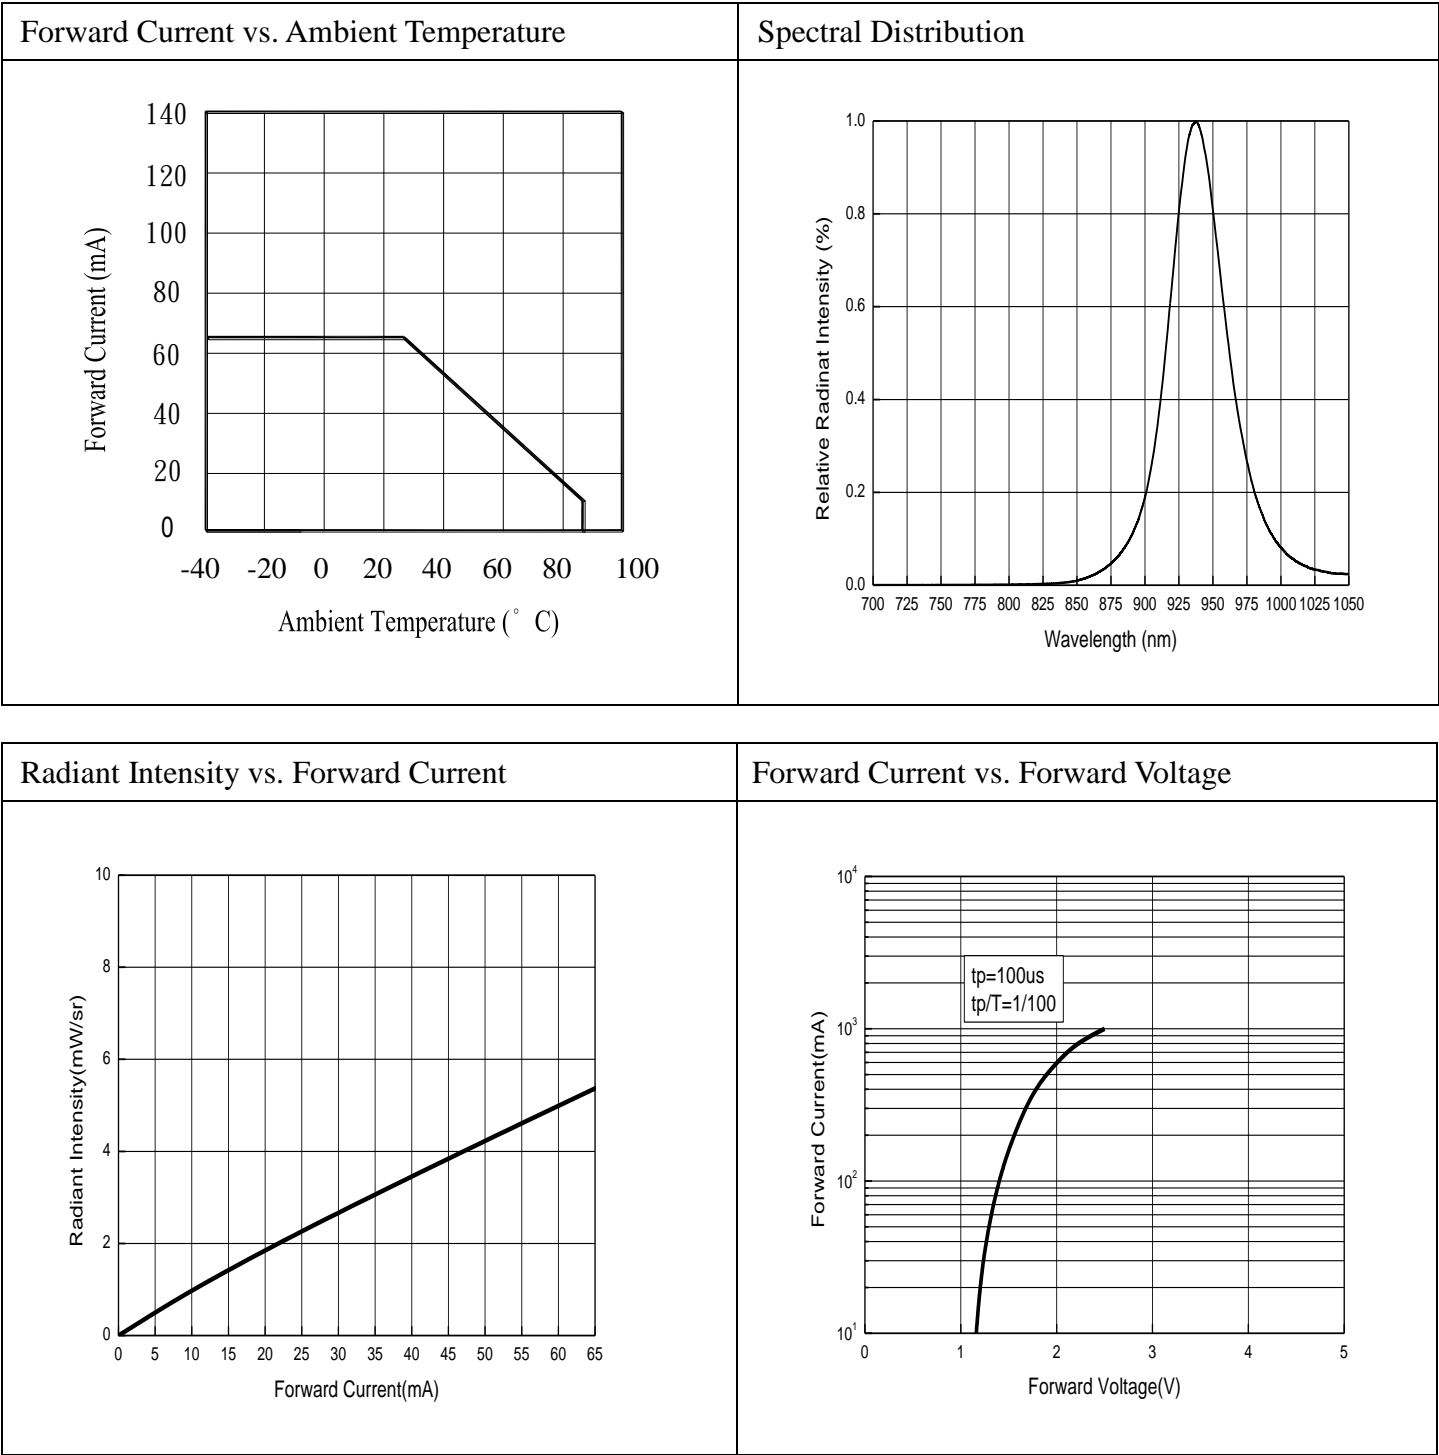

Relative Radiant Intensity vs. Angular Displacement

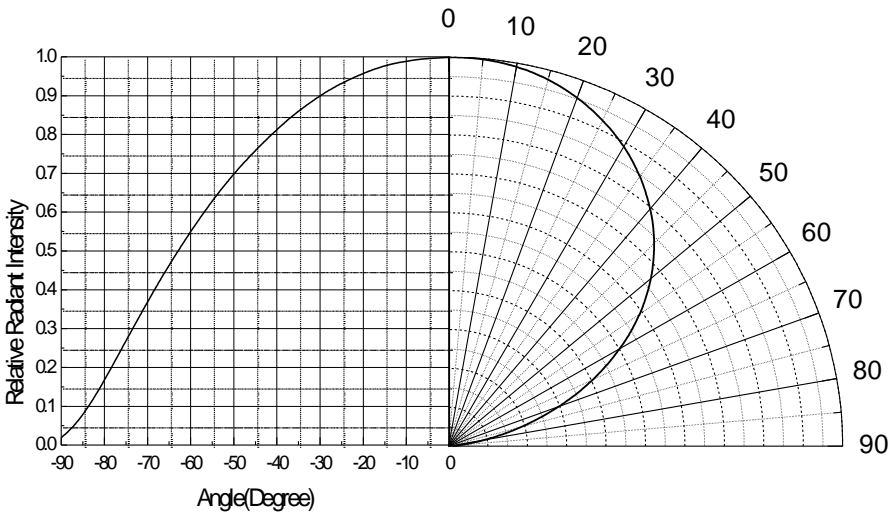

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change
(Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.

2.3 The LEDs should be used within a year.

2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.


2.5 The LEDs should be used within 72 hours (3 days) after opening the package

2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for Min. 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

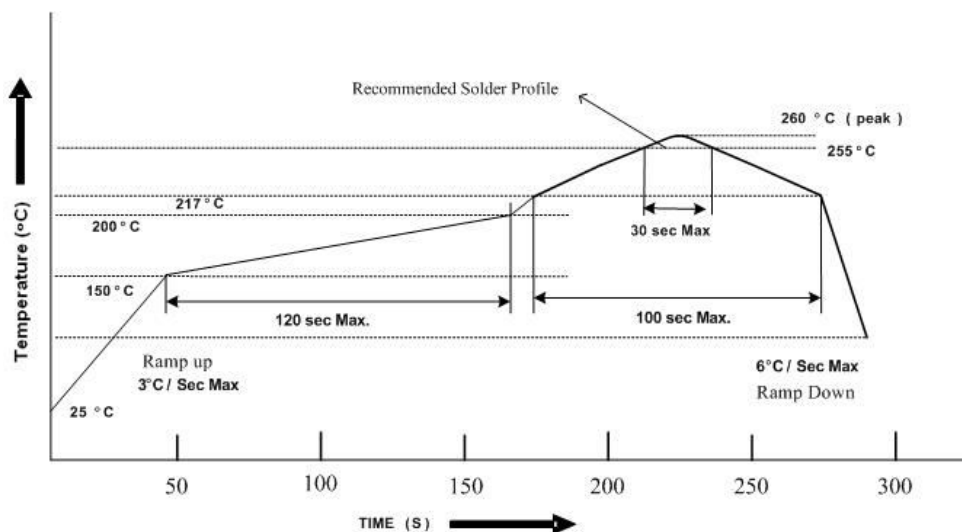

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing


Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

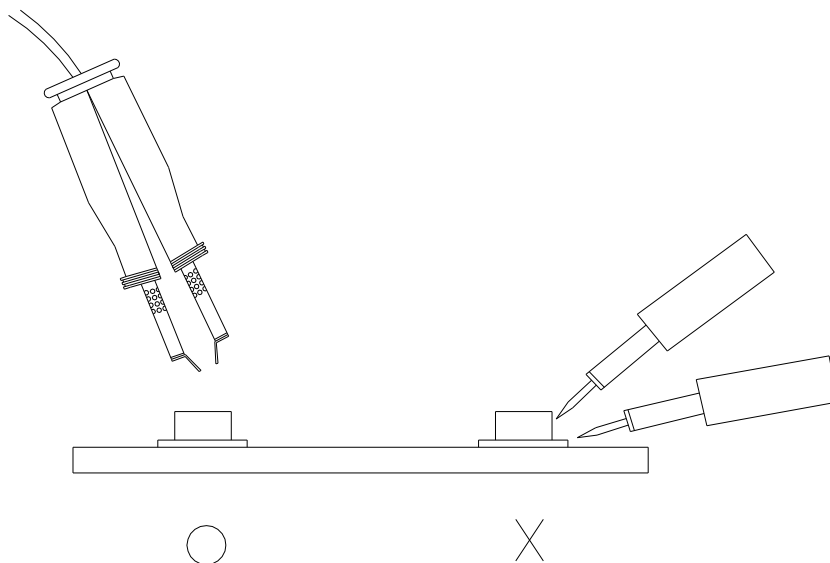

6. Sulfuration


Precautionary measures: Select and use quality guaranteed PCB board, solder substance and other related material. Avoid exposure to elemental sulfur substance. Never store LED with high oxidizing or reducing substances or other corrosive material. All the LED products can't be lighting in strong acid and strong alkali environment without special processing.

Package Dimensions

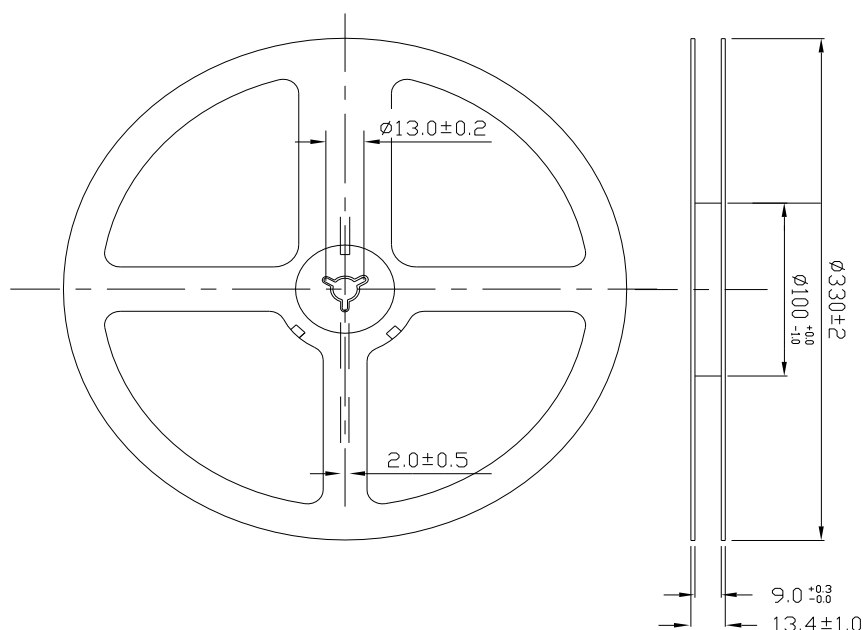

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm


Carrier Tape Dimensions : (Quantity: 2000pcs/reel)

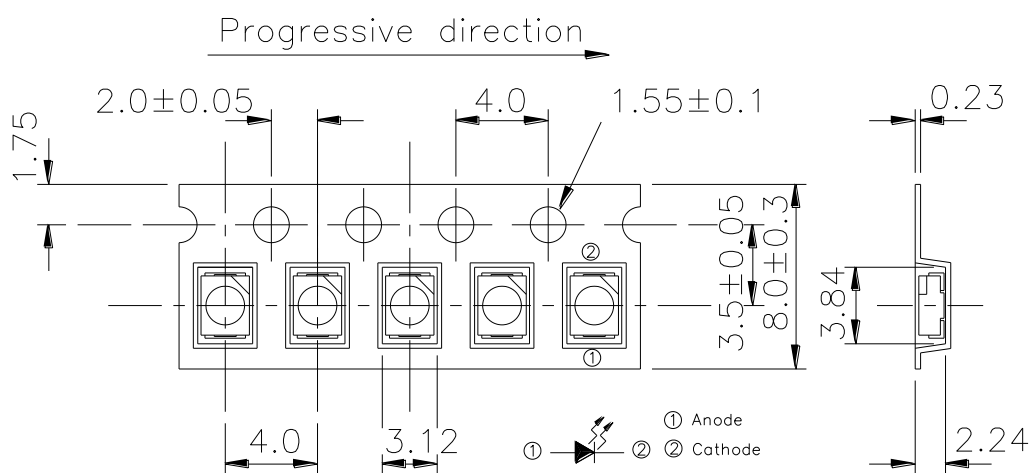



TOLERANCES UNLESS DIMENSION ± 0.1
ANGLE ± 0.5
UNIT:mm

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

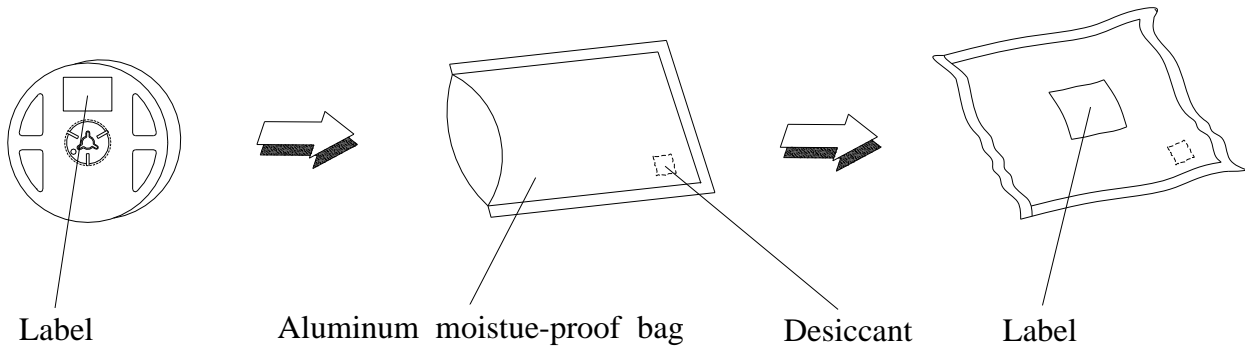Packing Procedure



Label Form Specification

| | |
|--|---------------------|
| RoHS  EVERLIGHT | |
| CPN : XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX | |
| P/N : XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX | |
| LOT NO : XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX | |
| QTY : XXXXXXXXXX | HUE : XXXXXXXXXX |
| CAT : XXXXXXXXXX | REF : XXXXXXXXXX |
| REFERENCE : XXXXXXXXXX | |
|  | |

CPN: Customer's Production Number
P/N : Production Number
QTY: Packing Quantity
CAT: Ranks
HUE: Peak Wavelength
REF: Reference
LOT No: Lot Number
MADE IN TAIWAN: Production Place

DISCLAIMER

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.