

# 44014RC Precision Epoxy NTC Thermistor



- 300,000 ohm Resistance @ 25°C
- Interchangeable  $\pm 0.2^\circ\text{C}$ ,  $0^\circ\text{C}$  to  $70^\circ\text{C}$ ,
- Pressed Disk Ceramic Sensor
- High sensitivity
- Thermally conductive epoxy coating
- 0.095" (2.4 mm) Maximum Diameter
- 32 AWG, 3" (7.6 cm) long Silver plated copper leads
- RoHS Compliant

## DESCRIPTION

Epoxy Encapsulated Precision Interchangeable NTC Thermistor utilizing high stability pressed-disk ceramic sensor for general applications.

## FEATURES

- 300,000 Ohm Resistance @ 25°C
- Interchangeability
- Good Long Term Stability
- High Sensitivity
- Thermally Conductive Epoxy Coating
- RoHS Compliance

## APPLICATIONS


- High-range Temperature Applications
- Tight Tolerance Instrumentation
- General Applications Requiring Stability
- Applications Requiring Sensing Small Changes in Temperature
- Non-condensing Moisture Environments
- Allows use in Applications World-wide

## PERFORMANCE SPECS

Parameter	Units	Value
Resistance @ 25°C	Ohms	100,000
tolerance $0^\circ\text{C}$ to $70^\circ\text{C}$	$^\circ\text{C}$	$\pm 0.2$
Beta Value 25/85	K	4462
Tolerance on Beta Value	%	0.8
Time response in air	Seconds	< 10
Dissipation Constant in air	mW/ $^\circ\text{C}$	1
Insulation Resistance (Min. of 100Mohms for 1 Sec.)	Volts	500

# 44014RC Precision Epoxy NTC Thermistor

## MECHANICAL DETAILS

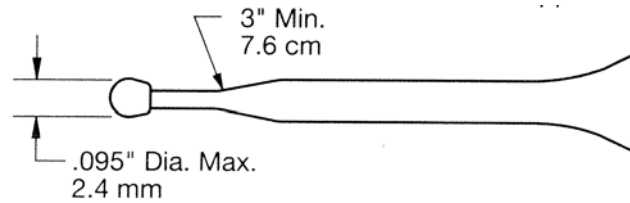

## RESISTANCE V TEMPERATURE TABLE

Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms
0	1088.0	30	236.4	60	63.70	90	20.45	120	7.594
1	1030.0	31	225.6	61	61.17	91	19.75	121	7.364
2	975.3	32	215.3	62	58.75	92	19.07	122	7.142
3	923.8	33	205.5	63	56.44	93	18.41	123	6.927
4	875.2	34	196.2	64	54.23	94	17.78	124	6.720
5	829.5	35	187.4	65	52.12	95	17.18	125	6.519
6	786.3	36	179.0	66	50.10	96	16.60	126	6.326
7	745.6	37	171.0	67	48.17	97	16.04	127	6.139
8	707.2	38	163.5	68	46.32	98	15.50	128	5.958
9	671.0	39	156.3	69	44.54	99	14.98	129	5.784
10	636.8	40	149.4	70	42.85	100	14.48	130	5.615
11	604.5	41	142.9	71	41.23	101	14.00	131	5.452
12	574.0	42	136.7	72	39.67	102	13.54	132	5.294
13	545.2	43	130.8	73	38.18	103	13.09	133	5.141
14	518.0	44	125.1	74	36.75	104	12.66	134	4.994
15	492.3	45	119.8	75	35.39	105	12.25	135	4.851
16	468.0	46	114.7	76	34.08	106	11.86	136	4.713
17	444.9	47	109.8	77	32.82	107	11.47	137	4.580
18	423.2	48	105.2	78	31.62	108	11.11	138	4.450
19	402.6	49	100.8	79	30.46	109	10.75	139	4.325
20	383.1	50	96.54	80	29.35	110	10.41	140	4.204
21	364.6	51	92.52	81	28.29	111	10.08	141	4.087
22	347.1	52	88.69	82	27.27	112	9.763	142	3.974
23	330.6	53	85.04	83	26.29	113	9.456	143	3.864
24	314.9	54	81.55	84	25.35	114	9.161	144	3.757
25	300.0	55	78.22	85	24.45	115	8.876	145	3.654
26	285.9	56	75.04	86	23.59	116	8.601	146	3.555
27	272.5	57	72.01	87	22.76	117	8.336	147	3.458
28	259.8	58	69.11	88	21.96	118	8.080	148	3.364
29	247.8	59	66.34	89	21.19	119	7.832	149	3.274
								150	3.186

# 44014RC Precision Epoxy NTC Thermistor

## ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ
701014	44014RC,THERM,ROHS COMPLIANT	300,000	300
701114	44014RC-BP (100 PCS),THERM,ROHS	300,000	300

\* For quantities less than Minimum Order Quantity – contact distribution

### NORTH AMERICA

Measurement Specialties, Inc.  
910 Turnpike Road  
Shrewsbury, MA 01545  
Tel: 1-508-842-0516  
Fax: 1-508-842-0342

Sales email:  
[temperature.sales.amer@meas-spec.com](mailto:temperature.sales.amer@meas-spec.com)

### EUROPE

Measurement Specialties, Inc  
Ballybrit Business Park  
Galway Ireland  
Tel: +353-91-753238  
Fax: +353-91-770789

Sales email:  
[temperature.sales.emea@meas-spec.com](mailto:temperature.sales.emea@meas-spec.com)

### ASIA

Measurement Specialties (China) Ltd.  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 51807  
China  
Tel: +86 (0) 755 33305088  
Fax: +86 (0) 755 33305099

Sales email:  
[temperature.sales.asia@meas-spec.com](mailto:temperature.sales.asia@meas-spec.com)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.