

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		NEW		22.3.26

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 10A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Contact Resistance : 30mΩ Max
- 4.Wire range : 24~12AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	320V
Rate current(A)	15A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~24P
- 3.Stripping length : 10~11mm
- 4.Operating temperature: -40°C~+120°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
TO	Over	Over	TO	Over	Over	Over	0.1/10	
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6.RoHS Compliance

## Ordering Information






**JL 2EDGKN - 508 XX G 01**

Pitch  
508=5.08PH

No.of pins  
2P,3P,4P~24P

Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
W=White  
Y=Yellow  
O=Orange  
E=Grey

Packing  
O=Pe bag  
T=Tube  
A=Tray

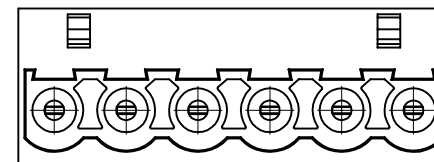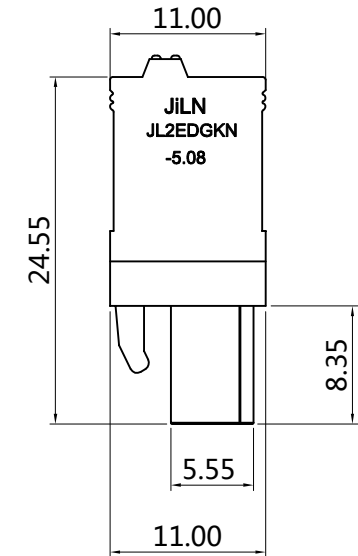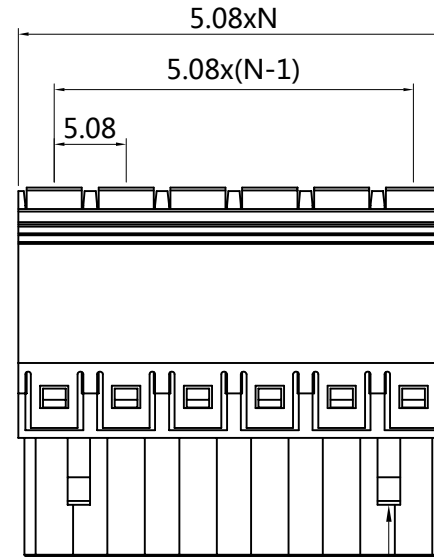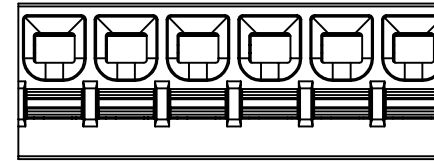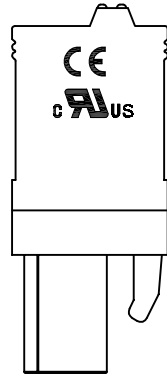

DRAW	SHUANGPING ZHENG	SCALE	FIT	<b>JILN</b> <sup>®</sup> 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD		
		UNIT	mm			
CHECK	LICHAD LIU	SIZE	A4		PART NO.	JL2EDGKN-508XXG01
		SHEET	1/1		TITLE:	JL2EDGKN-5.08-XXP 插拔式母座/绿色
APPROVE	YONGLIANG GAO	PROJ.				