
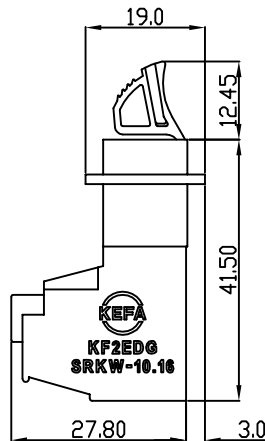
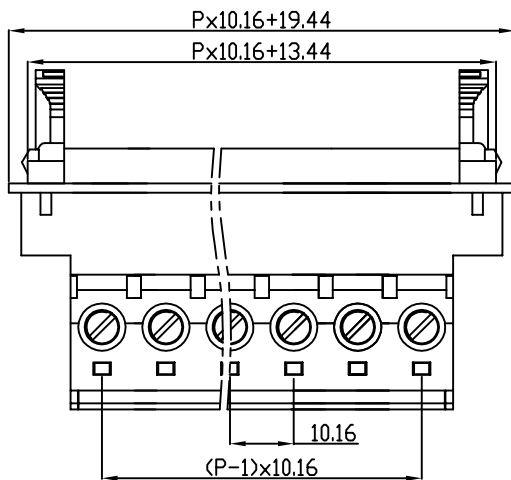

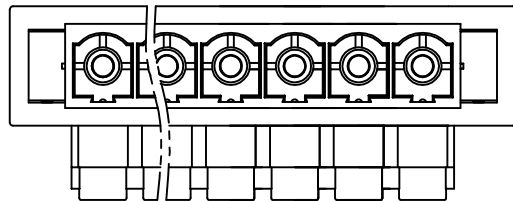


| linear dimension(Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —<br>▱<br>┐ |                |             |
|-------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------------|----------------|-------------|
| variable range                                        | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10       | over 10 to 100 | over 100 to |
| tolerance                                             | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10        | 0.30           | 0.60        |

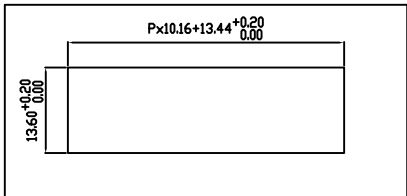

| REVISION RECORD |             |         |          |          |
|-----------------|-------------|---------|----------|----------|
| REV.            | DESCRIPTION | ECN No. | APPROVED | DATE     |
| A               | 新发行         |         | CLF      | 21.03.15 |
|                 |             |         |          |          |
|                 |             |         |          |          |
|                 |             |         |          |          |

| UL/CUL 技术 参数<br>UL/CUL Technical Data |                                    |  |      |      |
|---------------------------------------|------------------------------------|-------------------------------------------------------------------------------------|------|------|
| 等级                                    | Use Group                          | B                                                                                   | C    | D    |
| 额定电压                                  | Rated Voltage [V]                  | 600                                                                                 | 600  | 600  |
| 额定电流                                  | Rated Current [A]                  | 65                                                                                  | 65   | 5    |
| 接线范围                                  | Wire Range                         | 20-6                                                                                |      |      |
| 单/多芯线                                 | Solid/Stranded [AWG]               |                                                                                     |      |      |
| 耐电压                                   | Withstanding Voltage               | 2200V/1Min                                                                          |      |      |
| IEC 技术参数<br>IEC Technical Data        |                                    |  |      |      |
| 过电压类别                                 | Overvoltage Category               | III                                                                                 | III  | II   |
| 污染等级                                  | Contamination Class                | -                                                                                   | 2    | 2    |
| 额定电压                                  | Rated Voltage [V]                  | -                                                                                   | 1000 | 1000 |
| 额定电流                                  | Rated Current [A]                  | -                                                                                   | 57   | 57   |
| 额定冲击电压                                | Impulse withstand voltagea [KV]    | -                                                                                   | 8.0  | 6.0  |
| 导线截面积                                 | Conductor cross section            | 10.0                                                                                |      |      |
| 硬质/柔性导线                               | Solid/ flexible [mm <sup>2</sup> ] |                                                                                     |      |      |
| 材 料                                   |                                    | Material                                                                            |      |      |
| 绝缘材料                                  | Insulation Material                | PA66                                                                                |      |      |
| 阻燃等级                                  | Imflammability                     | UL94V-0                                                                             |      |      |
| 导体材料                                  | Contactur Material                 | 铜合金 Copper alloy                                                                    |      |      |
| 导体表面镀层                                | Contactive Coating                 | 镀镍 Ni plated                                                                        |      |      |
| 一般参数                                  |                                    | Other Data                                                                          |      |      |
| 间距                                    | Pitch [mm]                         | 10.16                                                                               |      |      |
| 极数                                    | Poles [P]                          | 2-12                                                                                |      |      |
| 剥线长度                                  | Stripping Length [mm]              | 12-13                                                                               |      |      |
| 螺丝                                    | Screw/扭矩 Torque(Max) [N.m]         | M4/1.2                                                                              |      |      |
| 工作温度                                  | Operating temperatur [°C]          | -40~+105                                                                            |      |      |
| 引针尺寸                                  | Pin Dimensions [mm]                | -                                                                                   |      |      |
| PCB板孔径                                | PCB Hole Diameter [mm]             | -                                                                                   |      |      |

|      |     |      |          |                                                                                                                                               |    |           |    |            |     |                               |                                                                                                  |          |   |
|------|-----|------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------|----|-----------|----|------------|-----|-------------------------------|--------------------------------------------------------------------------------------------------|----------|---|
| DES. | FZM | DATE | 21.03.15 | 单位 / UNITS                                                                                                                                    | mm | 尺寸 / SIZE | A4 | 比例 / SCALE | 1:1 | 第三视角 / THIRD ANGLE PROJECTION |                                                                                                  | 版本 / REV | A |
| CHK. | SY  | DATE | 21.03.15 | <div></div> 慈溪市科发电子有限公司<br>CIXI KEFA ELECTRONIC CO., LTD |    |           |    |            |     |                               | <div></div> |          |   |
| APP. | CLF | DATE | 21.03.15 |                                                                                                                                               |    |           |    |            |     |                               | 名称 / TITLE                                                                                       |          |   |