

Features

- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C

Applications

For use in low voltage high frequency inverters, freewheeling,DC/DC converters, and polarity protection applications.

Mechanical Data


- Case: DO-214AC(SMA)
- Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750,Method 2026
- Polarity: Cathode line denotes the cathode end

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS32	SS33	SS34	SS35	SS36	SS38	SS310	SS315	SS320
Device marking code			SS32	SS33	SS34	SS35	SS36	SS38	SS310	SS315	SS320
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	20	30	40	50	60	80	100	150	200
Maximum RMS Voltage	V _{RMS}	V	14	21	28	35	42	56	70	105	140
Maximum DC blocking Voltage	V _{DC}	V	20	30	40	50	60	80	100	150	200
Maximum Average Forward Rectified Current @60Hz sinewave, Resistance load,TL (Fig.1)	I _{F(AV)}	A	3.0								
Non-repetitive Peak Forward Surge Current @t=8.3ms Half-sine wave	I _{FSM}	A	80								
Storage temperature	T _{stg}	°C	-55 ~ +150								
Junction temperature	T _j	°C	-55 ~ +125				-55 ~ +150				
Typical Thermal Resistance	R _{θJ-A}	°C /W	55								
	R _{θJ-L}	°C /W	17								

Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	TEST CONDITIONS		SYMBOL	UNIT	SS32	SS33	SS34	SS35	SS36	SS38	SS310	SS315	SS320	
Maximum instantaneous forward voltage	I _F =3.0A		V _F	V	0.55			0.70		0.85		0.95		
Maximum DC reverse current at rated DC blocking voltage	V _{RM} =V _{DC}	Ta=25°C	I _R	mA	0.2					0.05				
		Ta=100°C			10					5				
Typical junction capacitance	4.0V DC,1MHz		C _J	pF	500			300						

DO-214AC(SMA)


► Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

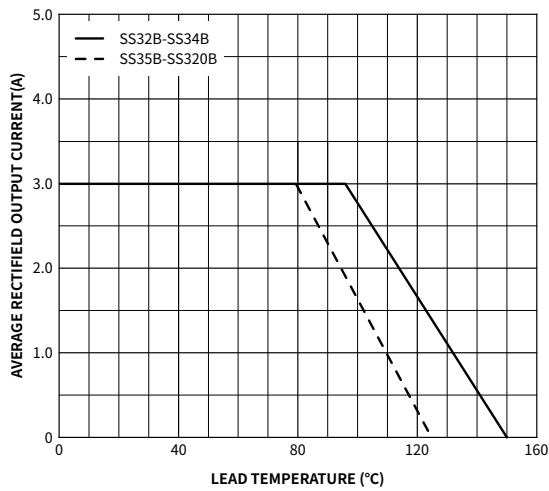


Fig. 1 Forward Current Derating Curve

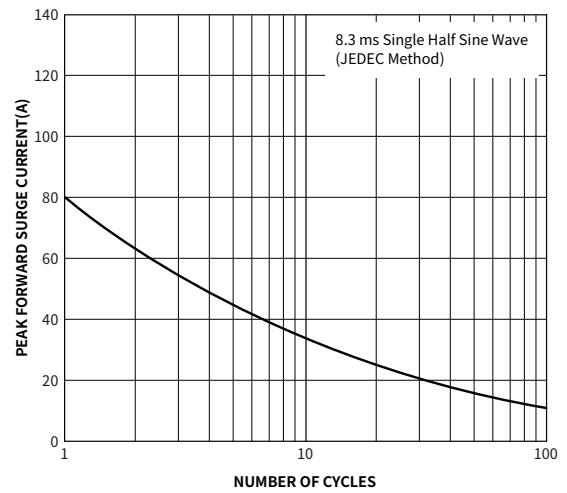


Fig. 2 Maximum Non-Repetitive Peak Forward Surge Current

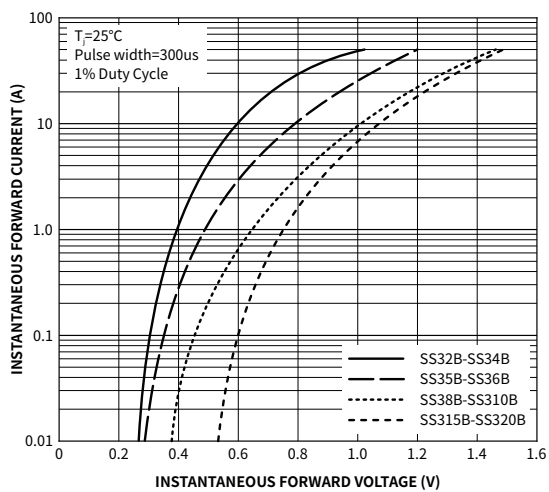


Fig. 3 Typical Forward Voltage

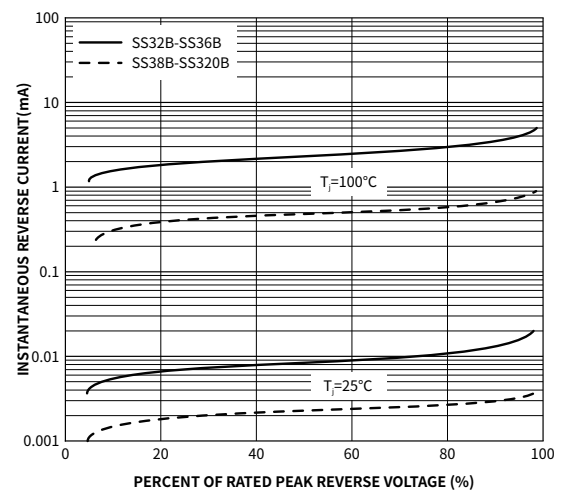


Fig. 4 Typical Reverse Characteristics

Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SMA	R2	0.07	5000	10000	80000	11"
SMA	R3	0.07	7500	15000	120000	13"

Package Outline Dimensions (SMA/DO-214AC)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.25	1.65	0.049	0.065
B	3.95	4.65	0.156	0.183
C	2.35	2.85	0.093	0.112
D	1.98	2.41	0.078	0.095
E	0.76	1.52	0.030	0.060
F	-	0.203	-	0.008
G	4.70	5.30	0.185	0.209
H	0.15	0.31	0.006	0.012

Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
M	1.70	-	0.067	-
J	2.10	-	0.082	-
K	-	2.30	-	0.090