

Pin busbar touch-safe, 16 mm<sup>2</sup> 1-phase, 1016 mm long can be cut, without end caps



Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	16 mm <sup>2</sup> , 1PH L1016mm
General technical data	
phase number	1
cross-section	16 mm <sup>2</sup>
Main circuit	
operational current rated value	80 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	15.5 mm
length	1 016 mm
net weight	211.34 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)

other	Environment
-------	-------------

[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3701>  
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3701>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3701](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3701)

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

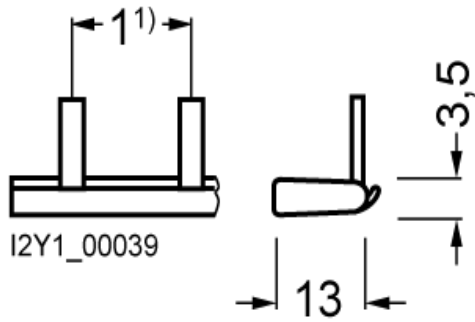

1) Pin spacings in MW (Modular widths, 1 MW = 18



last modified:

7/9/2021

