

**Honeywell Sensing and Control**



Search



**4TL11-5**

( Home : Products : Switches » MICRO SWITCH™ Toggle Switches » TL )

[contacts](#)


**narrow your search**

**Products**

- Controls Monitoring and Lighting (286)
- Machine Safety (1727)
- Sensors (6158)
- Switches (9781)
- Wireless (45)

**Technology**

- Control and Instrumentation (890)
- Electromechanical (9303)
- Magnetic (538)
- Platinum thin film (56)
- Thick Film (1372)
- More...



**TL Series Toggle Switch, 4 pole, 3 position, Screw terminal, Standard Lever**

*Actual product appearance may vary.*

[Sales & Service](#)

[Distributor Inventory](#)

- Customer Service
- Technical Support
- Global Sales & Service
- View Site Demo
- Site Comments?

[meet dr. larry](#)

**VIDEO** - Dr. Larry Goldstein explains our newest and best technologies.



Meet Dr. Larry

[my links](#)

- Login to iCOM
- Login to Rep/AD Portal
- Login to Digital University

[News Center](#)

HONEYWELL INTRODUCES TRUSTABILITY® NSC SERIES, UNCOMPENSATED / UNAMPLIFIED BOARD MOUNT PRESSURE SENSORS

HONEYWELL EXPANDS ITS LIMITLESS™ PLATFORM WITH THE LAUNCH OF ITS GLOBALLY AVAILABLE INDUSTRIAL WIRELESS RECEIVER

HONEYWELL EXTENDS ITS TRUSTABILITY® PRESSURE SENSOR PRODUCT LINE WITH A SINGLE SIDE LIQUID MEDIA OPTION

**MICRO SWITCH Anniversary site**

**new products**

**New Wireless Products**

Go farther. Work smarter. Explore new possibilities. Just by cutting the cord and making the switch.



[Wireless Web Site WGLA and WPMM XYR6000™](#)

[find out more](#)

**white papers**

- Wireless Switches Offer Unlimited Benefit
- Basic Switches Are Not Created Equal
- Applying Precision Switches
- Sensors for Medical Devices
- New Ways to Measure Torque
- Choosing Safety Switches
- Specifying Hour Meters


**Need help?**

[Click here to contact us](#)

[Overview](#)   [Specs](#)   [Documentation](#)   [Application Notes](#)

**Product Specifications**

Circuitry/Operating action

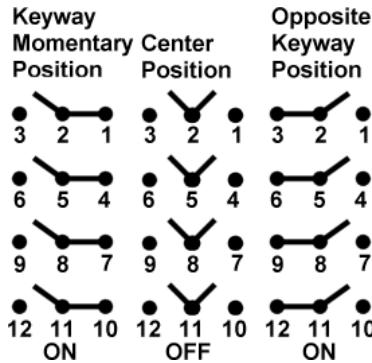

Product Type	MICRO SWITCH™ Toggle Switch
Ampere/Voltage Range (Resistive Load)	0.75 A at 115 Vdc, 0.5 A at 250 Vdc, 0.5 A to 10 A at 0.5 Vac to 277 Vac, 0.5 A to 18 A at 0.5 Vdc to 28 Vdc
Circuitry	4PDT
Action	3 position
Mounting	Bushing 15/32 in
Termination	Screw
Lever Type	Standard
Comment	Silver cadmium oxide contacts
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	TL