
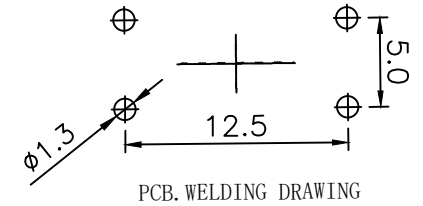

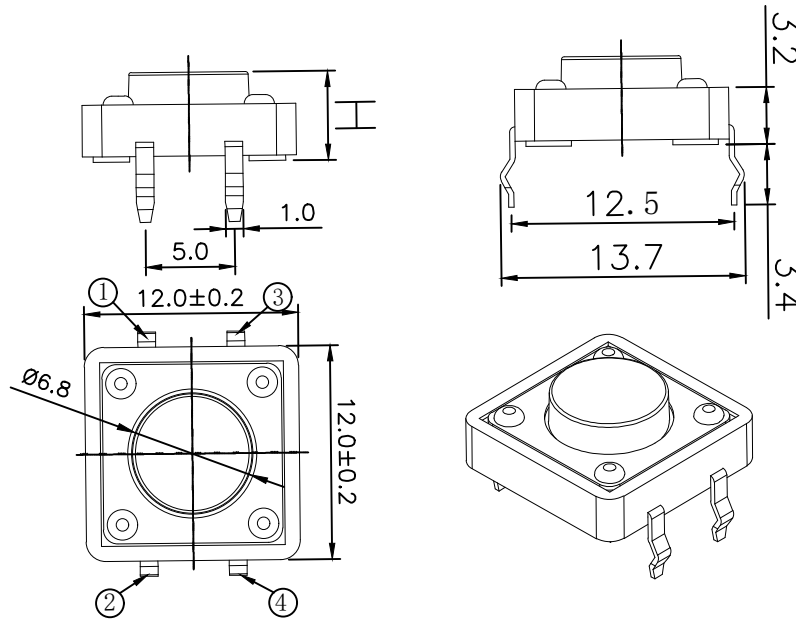


RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

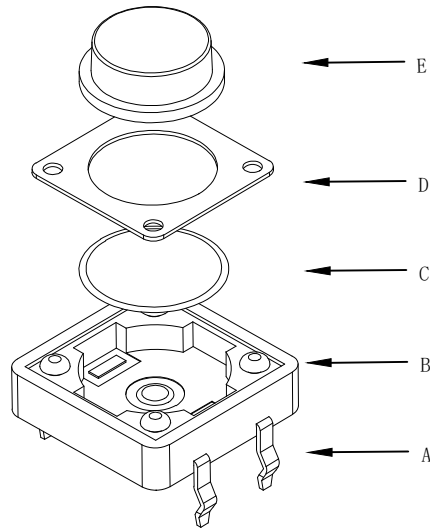

Specification

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011Ω min.
Contact resistance	100mΩ max. initial.
Dielectric Strength	250 V AC(1mm)
Travel	0.3±0.1mm
Storage Temperature	-30° C to 85° C

Mechanical

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR
E	Button	PPA	1	Black
D	COVER	Brass	1	Cleaning
C	DOVE	Stainless Steel	1	Plated Ag
B	HOUSING	PPA	1	Black
A	PIN	PHOSPHOR BRONZE	1	Plated Ag

Type	Operating Force(gf)	Height mm	Button	Leads Shape (J, G, T)	Ground pin (0, 1)	Pegs Option (0, 1)
BTS0F001	250±50	Q 15.0 P 13.0 O 12.0 N 11.0 M 10.0 L 9.0 K 8.5 J 8.0 H 7.5 G 7.0 F 6.5 E 6.0 D 5.5 C 5.0 B 4.5 A 4.3	B (BLACK)	Y	0	0

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Bozhong TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED.

UNITS mm
MAT'L
FINISH
Q'TY

PART NO. BTS0F001
APPD: ROGER
CHKD: ROC
DR: BILLY WANG 2020/08/21

东莞市博众电气有限公司
Dongguan Bozhong Electrical Co., Ltd
TITLE: TACTILE SWITCH 12x12mm
DWG NO.: BTS0F001

SCALE	SHEET	REV.
1/1	1/1	A1

Packaging:
1,000 pieces for bulks