
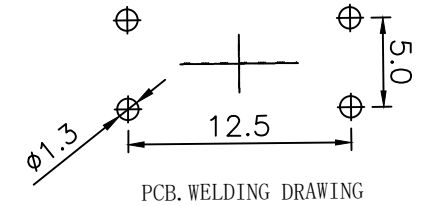

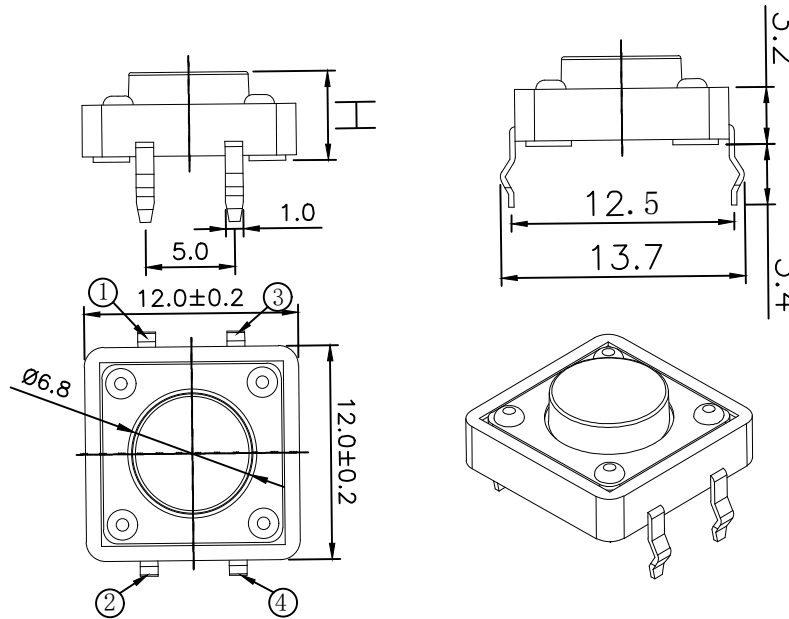


RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

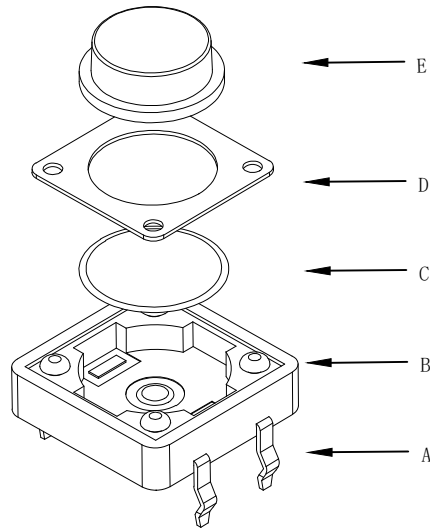

Specification

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011Ω min.
Contact resistance	100mΩ max. initial.
Dielectric Strength	250 V AC(1mm)
Travel	0.3±0.1mm
Storage Temperature	-30° C to 85° C


Mechanical

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR
E	Button	PPA	1	Black
D	COVER	Brass	1	Cleaning
C	DOVE	Stainless Steel	1	Plated Ag
B	HOUSING	PPA	1	Black
A	PIN	PHOSPHOR BRONZE	1	Plated Ag

Type	Operating Force(gf)	Height mm	Button	Leads Shape (J, G, T)	Ground pin (0, 1)	Pegs Option (0, 1)
BTSOF001	250±50	15.0 13.0 12.0 11.0 10.0 9.0 8.5 8.0 7.5 7.0 6.5 6.0 5.5 5.0 4.5 4.3	B (BLACK)	Y	0	0

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Bozhong TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED.

UNITS mm
MAT'L
FINISH
Q'TY

 博众电气 BOZHONG ELECTRICAL			东莞市博众电气有限公司 Dongguan Bozhong Electrical Co., Ltd		
PART NO. BTSOF001			TITLE: TACTILE SWITCH 12x12		
APPD: ROGER			DWG NO. : BTSOF001		
CHKD: ROC					
DR: BILLY WANG 2020/08/21					
			SCALE	SHEET	REV.
			1/1	1/1	A1

Packaging:
1,000 pieces for bulks

SCALE	SHEET	REV.
1/1	1/1	A1