
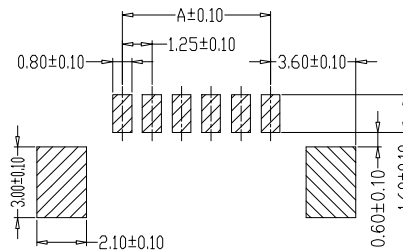


SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20MΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer Nylon46、UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

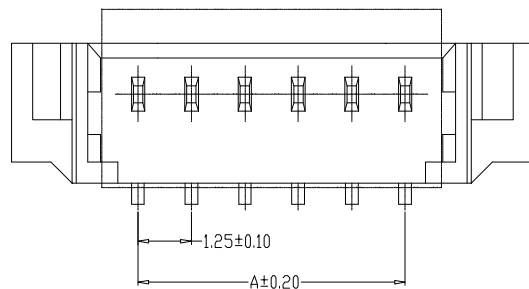

编号	尺寸 (mm)	
	A	B
YTC-A1251-03AB	2.50	8.60
YTC-A1251-04AB	3.75	9.85
YTC-A1251-05AB	5.00	11.10
YTC-A1251-06AB	6.25	12.35

PCB LAYOUT

技术要求:

1. “ ”表示为重要尺寸:
B塑料为闭口结构 2P-7P以上外形尺寸3.70±0.25

深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO., LTD		页码 (SHEET)	1/1	单位(UNIT): MM
		版本 (REV)	A1	比例(SCALE)
品名 (ITEM NO)	1.25间距闭口立贴 WAFER DIP TYPE	日期 (DATE)	2021. 10. 12	
料号 (PART NO)	YTC-A1251-**AB	设计 (DESIGN)	LUO	
图号 (DWG NO)		审核 (CHECKED)	ROGER LI	GENERAL TOLERANCE X.±0.25 X'.±2" .XX±0.20 .X'±1" .XX±0.15 .XX±0.5" .XXX±0.10 .XXX±0.5"
		核准 (APPROVED)	ROC ZHAO	

These drawings and specifications are Shenzhen Yiyuan Technology Co Ltd.The property should not be copied. Without Shenzhen Yiyuan Technology Co. Ltd.Prior written consent to copy or use in any way. Email at info@yiyuanswitches.com